



Acrylic Wall Frame Kits


Specifications and Instruction Guide

CIVII	WAC2228-C-AS16-30SL	WAC2228-C-AS16-30BK	WAC2228-C-AS16-30GD	WAC2228-C-AS16-30BR
SKU	WAC2228-C-SBLS16-30	WAC2228-C-SBLP16-30		


Package Includes

- ► 2 x Acrylics
- ► 4 x Standoffs
- ► 4 x Screws and Anchors
- ▶ 1x Drill Template
- ▶ 1x Instruction Guide

Standoffs	AS16-30SL	AS16-30BK	AS16-30GD	AS16-30BR	SBLS16-30	SBLP16-30		
Diameters	5/8" (16mm)	Distanc	e From Wall	1" (25mm)			
Material Thickness Accepted	Between (0''	' and 9/16'')		Thread	Metric M10			
Aluminum	 ► Silver Anodized ► Black Anodized ► Champagne Anodized ► Gold Anodized 		Sto	ainless Steel	SS Steel ► Satin Brushed ► Polished			
Washers	No			Washers	x 8			

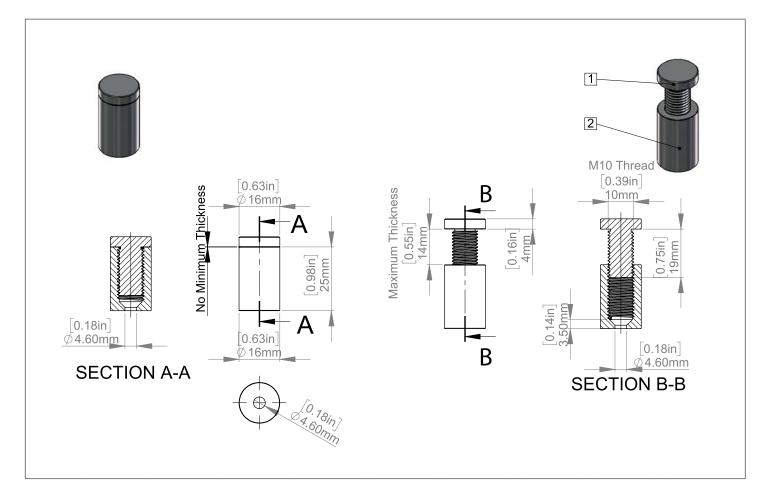

Acrylics	WAC2228-C		
Frame Width	23-3/4" (603.3mm)	Frame Height	29-3/4" (755.7mm)
Insert Width	22'' (558.8mm)	Insert Height	28" (711.2mm)
Top Thickness	3/16 (5mm)	Bottom Thickness	3/16 (5mm)
Pre-Drill Holes	4 x Ø 1/2" (12.7mm)	Finish	All edge polished Ultra-Fine

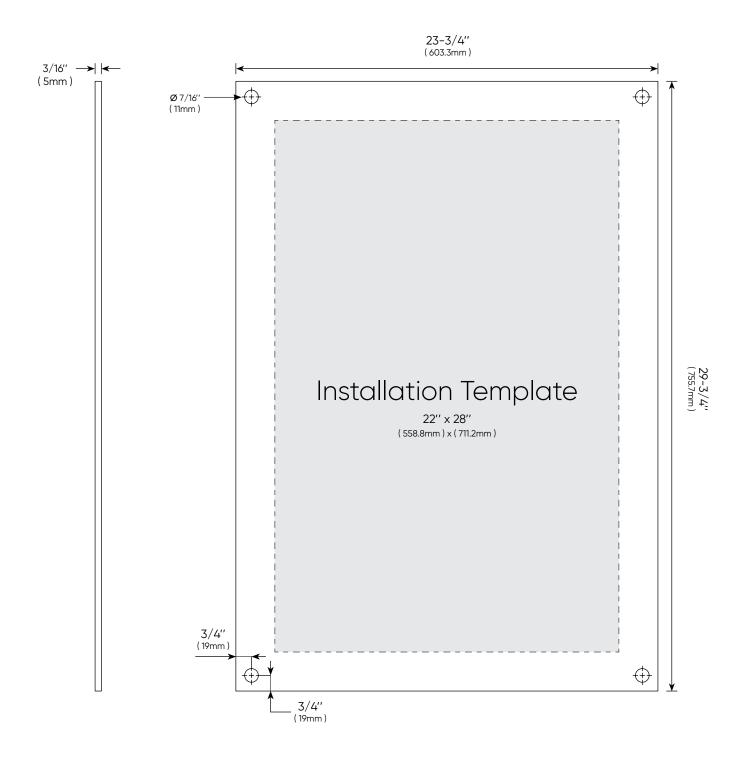

Installation Steps

Directions

Place template on wall with tape. Make sure that template is level. Mark the hole locations.




2 Drill a 1/4" hole in to the wall where marks were made.



Insert supplied anchors into the wall.



4 Mount the barrels to the wall.

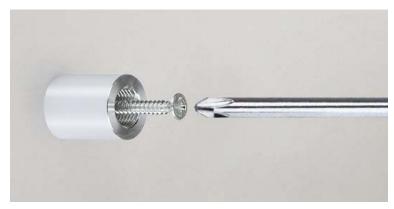

Installation Steps

Directions

Remove plastic film from the back of the panels.
Center your image onto one of the panels and sandwich the second panel on top of the image making sure all of the edges and holes are aligned.



Place the sandwiched panels over the standoff barrels, insert the screw caps through the holes and into the barrels. Hand tighten the screw caps to secure both the panels and image in place.



This document and the product mentioned in reference are the exclusive property of MBS-Standoffs, they can not be used, reproduced, disclosed or disclosed without prior authorization!