


Acrylic Wall Frame Kits Specifications and Instruction Guide

	WAC2436-C-AS16-25SL		WAC2436-C-AS16-25BK		WAC2436-C-AS16-25GD		WAC2436-C-AS16-25BR		
SKU	WAC2436-C-SBLS16-25		WAC2436-C-SBLP16-25						
Package Includes	 2 x Acrylics 6 x Stando 6 x Screws 1 x Drill Ter 1 x Instruct 	offs and Anchors nplate	<u>.</u>				<u></u>		
Standoffs	AS16-25SL	AS16-25BK	AS16-25GD	AS16-25BR	SBLS16-25	SBLP16-25			
Diameters	5/8" (16mm)	Distanc	e From Wall	3/4″ (20mm)				
Material Thickness Accepted	Between (0'' and 9/16'')			Thread	Metric M10				
Aluminum	 Silver Anodized Black Anodized Champagne Anodized Gold Anodized 			ainless Steel	 Satin Brushed Polished 				
Washers	No			Washers	x 12				
[0.18in] d.60mm SECTION	Minimum Thickness	[0.63in] Ø 16mm	(0.18in] (0.18in] (0.18in]	Maximum Thickness [0.55in] 14mm	B B B B Cuioin	[0.14in] 3.50mm	M10 Thread [0.39in] 10mm [0.18in] 24.60mm CTION B-	•	

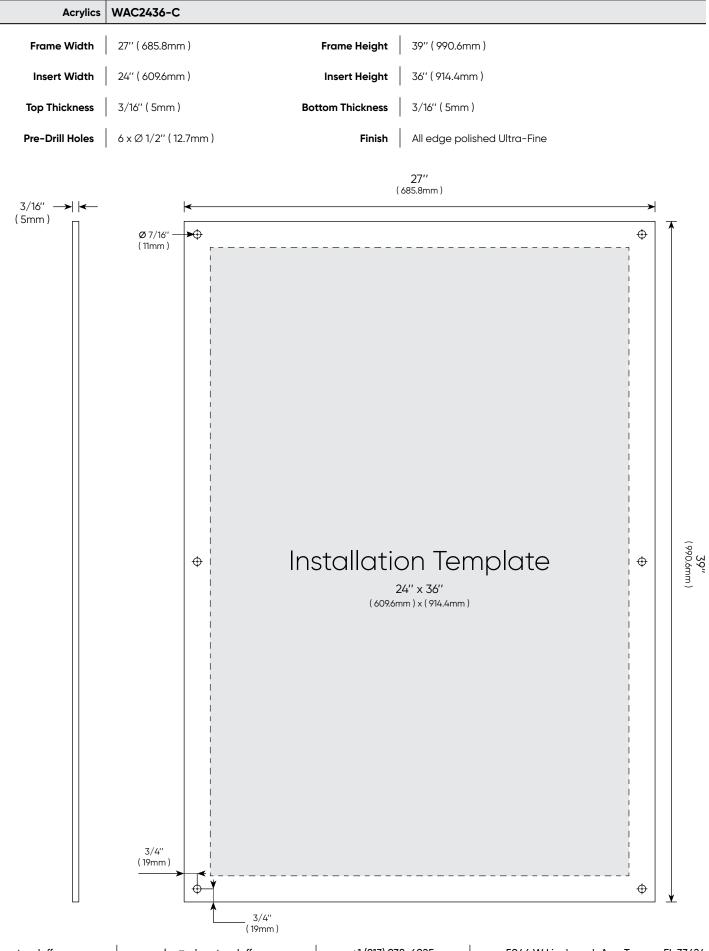

Installation Steps

Directions		
1	Place template on wall with tape. Make sure that template is level. Mark the hole locations.	Constant of the second se
2	Drill a 1/4" hole in to the wall where marks were made.	Drill Hete
3	Insert supplied anchors into the wall.	
4	Mount the barrels to the wall.	

Installation Steps

Directions

5 Remove plastic film from the back of the panels. Center your image onto one of the panels and sandwich the second panel on top of the image making sure all of the edges and holes are aligned.



6 Place the sandwiched panels over the standoff barrels, insert the screw caps through the holes and into the barrels. Hand tighten the screw caps to secure both the panels and image in place.



This document and the product mentioned in reference are the exclusive property of MBS-Standoffs, they can not be used, reproduced, disclosed or disclosed without prior authorization!