





America's #1
Choice for Standoffs

FREE SHIPPING
In The Continental United States*

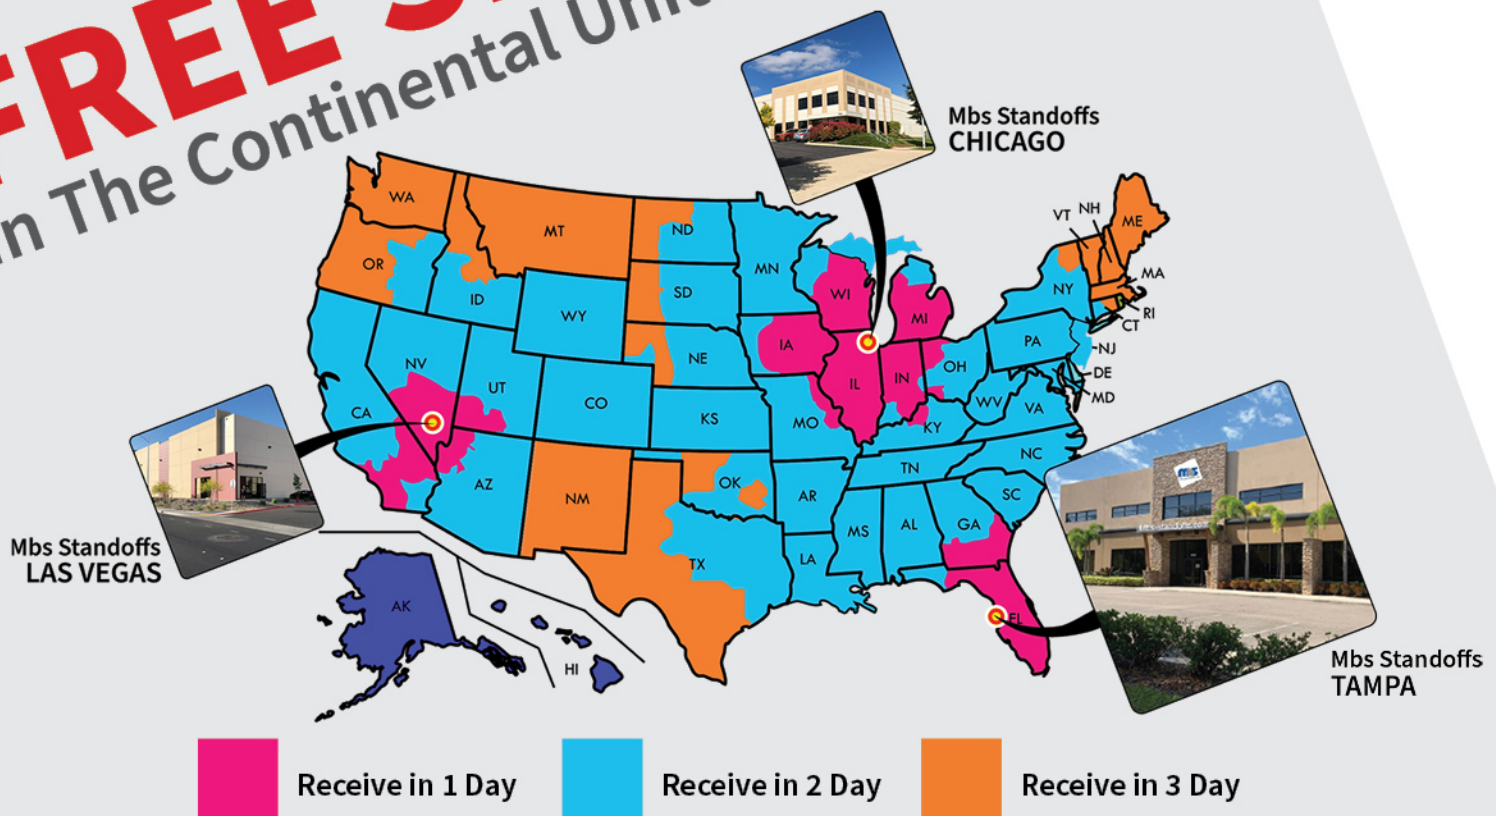

WE SHIP ORDERS SAME DAY TO 6:30 PM FROM TAMPA

1 (813) 938-6025

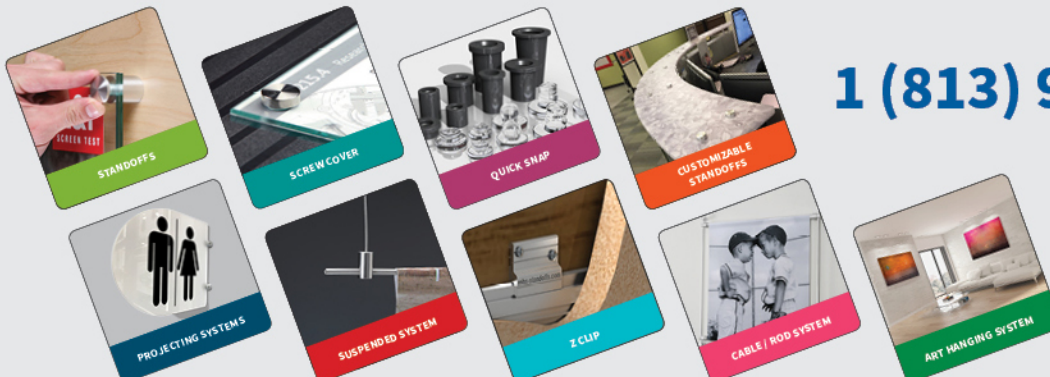

*Ground shipping only (See website for terms and conditions).



AMERICA'S #1 CHOICE FOR STANDOFFS

For you and for us, the new Mbs Standoffs catalog is always an important event!

Crafted by experts for the experts, it is a complete interactive tool guide to facilitate your job, and to help you be a step ahead at all times! We are hoping to answer your questions even more precisely, as well as to enable you to take full advantage of this offer.

Either by phone, email, fax, or directly on our e-commerce website, our experts truly value the opportunity to help you in meeting all of your job requirements. Our experts are always by your side to advise you.

At Mbs, we put our heart, passion, and professionalism at your service to always offer you the best!

Constantly in the market, always exhibiting in tradeshow, we are continually innovating, and testing new products to offer you the best quality you are looking for. Our valuable specialists are trained throughout the year.

At Mbs, we assure you that we fully understand our products and market and we will provide you with the best technical guidance.

**Contact us to get more information
on becoming a distributor.**

**1 (813) 938-6025
sales@mbs-standoffs.com**

GET ALL PRICES THROUGH OUR NEW ONLINE STORE!

Welcome Mbs shoppers to our **NEW WEB SITE**, Enjoy it and please should you have any questions, call or email us at sales@mbs-standoffs.com.

1

LOG ON to

www.mbs-standoffs.com

You can select the product you are looking for by hovering over each of the categories and choosing a subcategory.

2

Search using filter selection and find the right products!

3

Use all the product tabs to find:

- Description
- Pictures
- Datasheets
- Videos

4

Our new filters make it easy to quickly find the right product. Search using filter selection and find the product for your projects needs.

Our New Filters make it easy to quickly find the right product

Categories at your Finger Tips

NEW

mbs-standoffs.com

www.mbs-standoffs.com

COME TO MBS STANDOFFS - THE GO-TO PLACE FOR ALL OF YOUR PROMOTIONAL SIGN AND DISPLAY REQUIREMENTS.


YouTube

FOLLOW US ON YOUTUBE!

- Product Videos
- Instruction Guides
- Testimonials
- Ideas and more...



99% of Orders Ship Same Day!

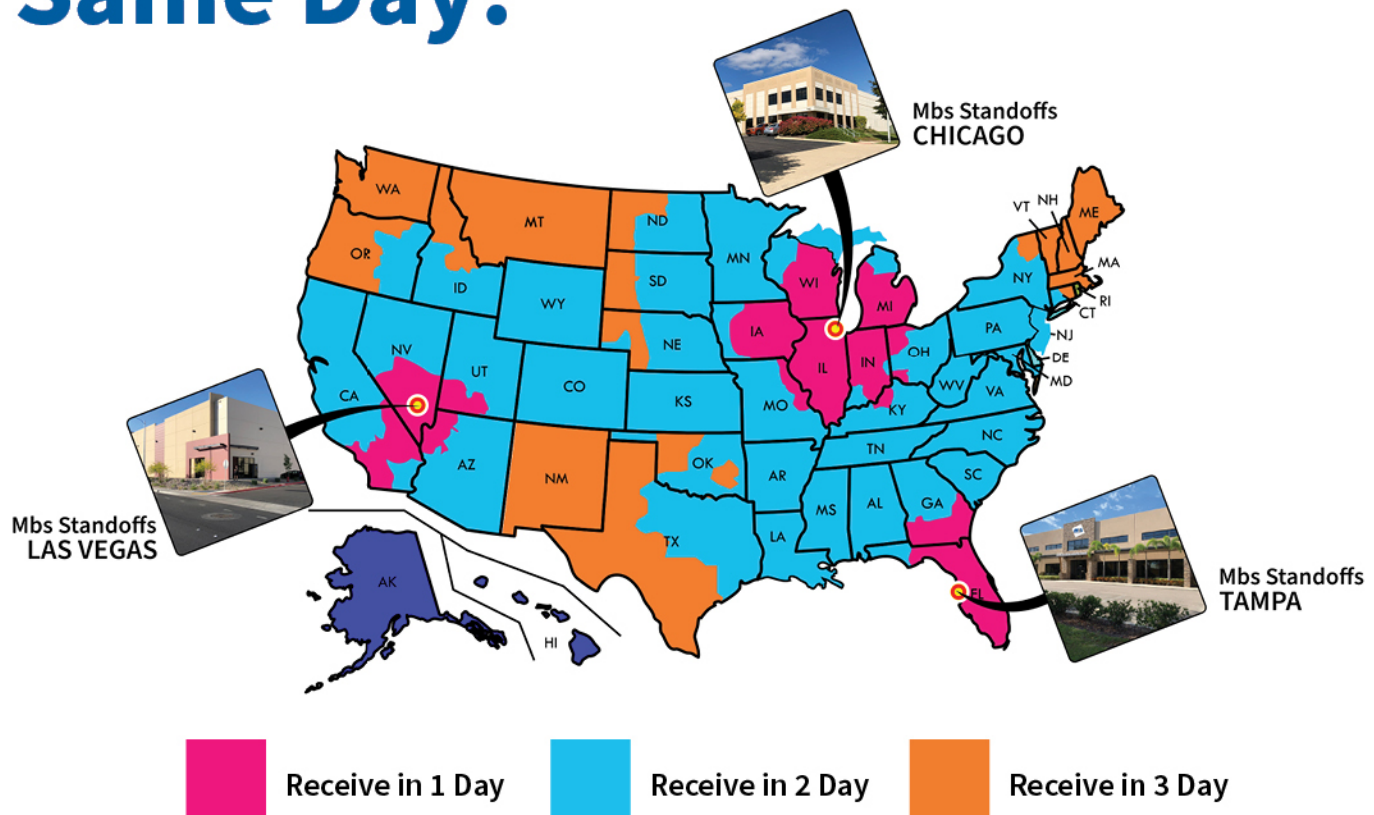

Free Daily Pickup and 1 or 2 Days Ground Shipping to Most of the States

Daily Pick-ups

- We have a daily pick-up, so that all of our customers can take advantage of same day shipping.
- **Blind Shipping & Drop Shipping Available Upon Request (Fees may apply)**
- Don't forget we can always ship on your account.
- If you are local, you can pick up your order within 30 minutes of placing your order.



Monday–Thursday up to 6:30pm,
Friday up to 5:30pm



Monday–Thursday up to: 6:30pm,
Friday up to 5:30pm



Shipping to Canada with Fedex, UPS & USPS, and anywhere in the world with DHL




CONTENTS




mbs-standoffs.com

NEW IN 2020


SIGNATURE CABLE SYSTEMS

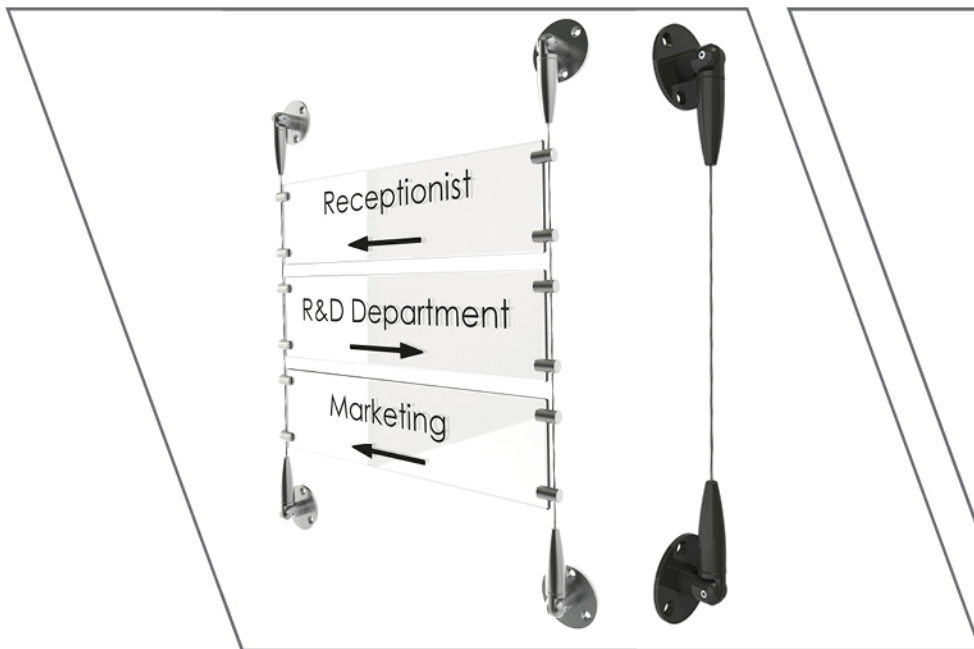


3/8" ROD SYSTEMS

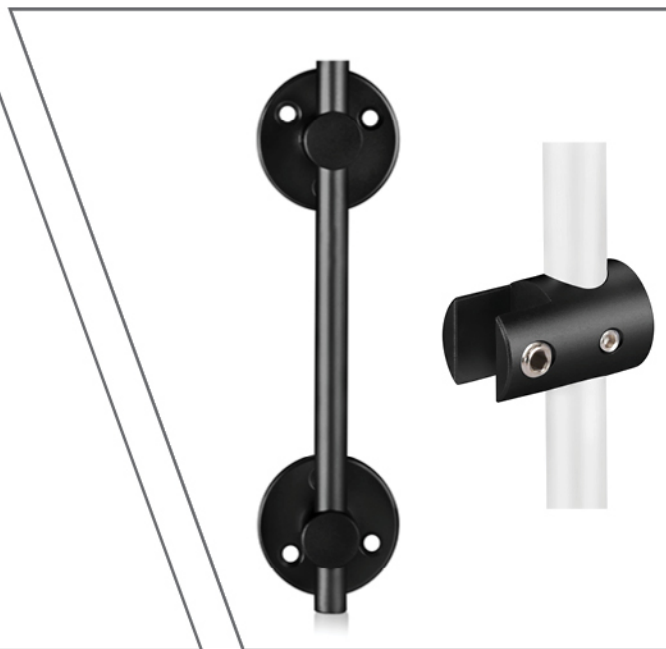

3/8" PROJECTING SYSTEMS

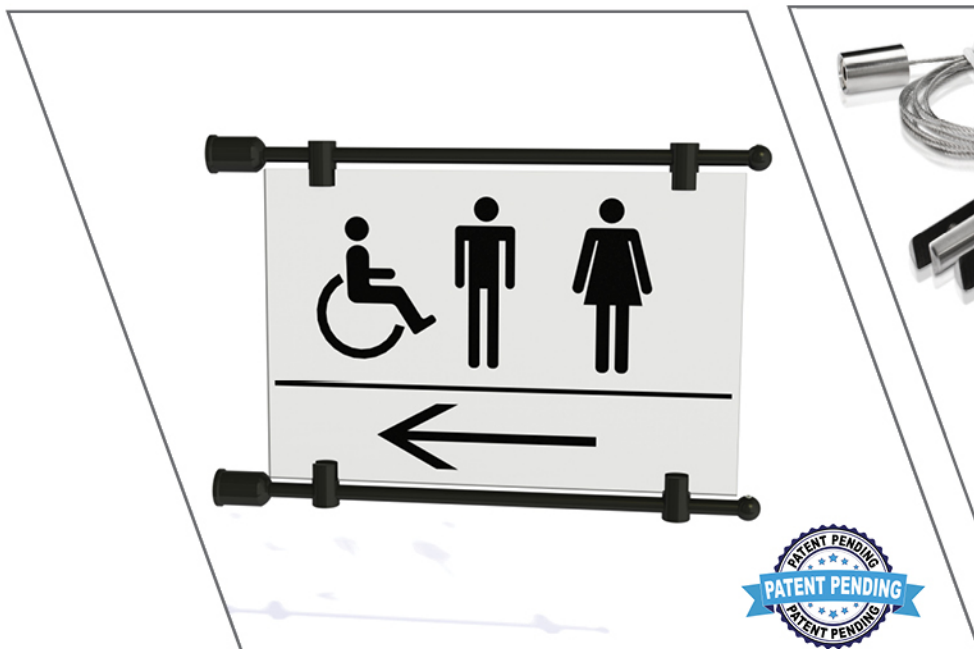

SUSPENDED SYSTEMS

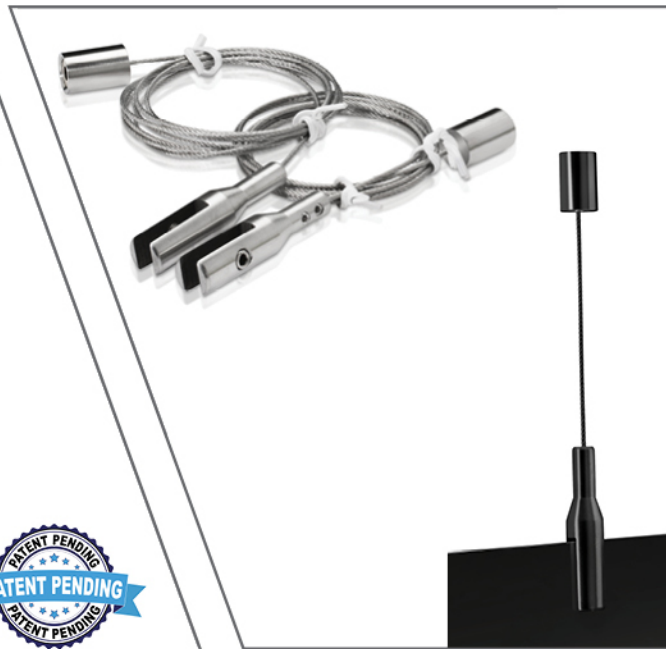



STANDOFFS / EDGE GRIP STANDOFFS



p4



p8



p10



p12



p13



p15



p16



p18



p20



p24



p25



p26



p30



p32



p36


High Quality Aluminum “All In One”

Standoffs (6 Finishes) – For Indoor and Outdoor Use

- Wall mounted standoffs
- Designed from high quality solid aluminum for indoor & outdoor
- 6 different finishes
- 6 different diameters
- 5 different heights
- Mounting washers
- Mounting hardware not included
- 2 styles



ROUNDED or FLAT HEAD

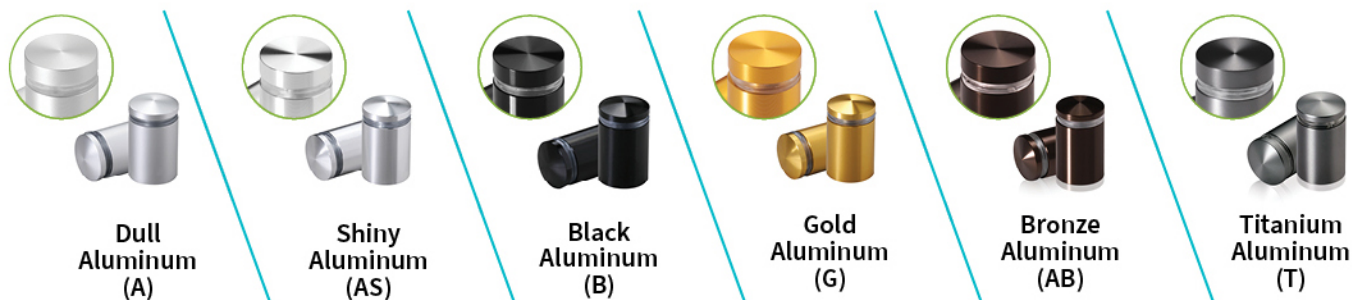

Inexpensive Aluminum Tamper Proof “All in One”

Tamper Proof Standoffs Engineered with a Reverse Thread – for Indoor and Outdoor Use

Diameter 'A'	Standoff 'B'	Material Thickness 'C'	Aluminum Rounded Head					
								
1/2" 3/8" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	AL12-12A	AL12-12AS	AL12-12B	AL12-12G	AL12-12AB	AL12-12T
	3/4" (19.0 mm)	1/16" to 1/2" (12.7 mm)	AL12-25A	AL12-25AS	AL12-25B	AL12-25G	AL12-25AB	AL12-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL12-30A	AL12-30AS	AL12-30B	AL12-30G	AL12-30AB	AL12-30T
	1 3/4" (45.0 mm)	0 to 1/2" (12.7 mm)	AL12-50A	AL12-50AS	AL12-50B	AL12-50G	AL12-50AB	AL12-50T
	2 1/2" (65.0 mm)	0 to 1/2" (12.7 mm)	AL12-70A	AL12-70AS	AL12-70B	AL12-70G	AL12-70AB	AL12-70T
5/8" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.3 mm)	AL16-12A	AL16-12AS	AL16-12B	AL16-12G	AL16-12AB	AL16-12T
	3/4" (19.0 mm)	1/16" to 1/2" (12.7 mm)	AL16-25A	AL16-25AS	AL16-25B	AL16-25G	AL16-25AB	AL16-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL16-30A	AL16-30AS	AL16-30B	AL16-30G	AL16-30AB	AL16-30T
	1 3/4" (45.0 mm)	0 to 1/2" (12.7 mm)	AL16-50A	AL16-50AS	AL16-50B	AL16-50G	AL16-50AB	AL16-50T
	2 1/2" (65.0 mm)	0 to 1/2" (12.7 mm)	AL16-70A	AL16-70AS	AL16-70B	AL16-70G	AL16-70AB	AL16-70T
3/4" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	AL19-12A	AL19-12AS	AL19-12B	AL19-12G	AL19-12AB	AL19-12T
	3/4" (19.0 mm)	1/16" to 1/2" (12.7 mm)	AL19-25A	AL19-25AS	AL19-25B	AL19-25G	AL19-25AB	AL19-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL19-30A	AL19-30AS	AL19-30B	AL19-30G	AL19-30AB	AL19-30T
	1 3/4" (45.0 mm)	0 to 1/2" (12.7 mm)	AL19-50A	AL19-50AS	AL19-50B	AL19-50G	AL19-50AB	AL19-50T
	2 1/2" (65.0 mm)	0 to 1/2" (12.7 mm)	AL19-70A	AL19-70AS	AL19-70B	AL19-70G	AL19-70AB	AL19-70T
7/8" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.3 mm)	AL22-12A	AL22-12AS	AL22-12B	AL22-12G	AL22-12AB	AL22-12T
	3/4" (19 mm)	1/16" to 1/2" (12.7 mm)	AL22-25A	AL22-25AS	AL22-25B	AL22-25G	AL22-25AB	AL22-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL22-30A	AL22-30AS	AL22-30B	AL22-30G	AL22-30AB	AL22-30T
	1 3/4" (45 mm)	0 to 1/2" (12.7 mm)	AL22-50A	AL22-50AS	AL22-50B	AL22-50G	AL22-50AB	AL22-50T
	2 1/2" (65 mm)	0 to 1/2" (12.7 mm)	AL22-70A	AL22-70AS	AL22-70B	AL22-70G	AL22-70AB	AL22-70T
1" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.3 mm)	AL25-12A	AL25-12AS	AL25-12B	AL25-12G	AL25-12AB	AL25-12T
	3/4" (19 mm)	1/16" to 1/2" (12.7 mm)	AL25-25A	AL25-25AS	AL25-25B	AL25-25G	AL25-25AB	AL25-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL25-30A	AL25-30AS	AL25-30B	AL25-30G	AL25-30AB	AL25-30T
	1 3/4" (45 mm)	0 to 1/2" (12.7 mm)	AL25-50A	AL25-50AS	AL25-50B	AL25-50G	AL25-50AB	AL25-50T
	2 1/2" (65 mm)	0 to 1/2" (12.7 mm)	AL25-70A	AL25-70AS	AL25-70B	AL25-70G	AL25-70AB	AL25-70T
1 1/4" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.3 mm)	AL30-12A	AL30-12AS	AL30-12B	AL30-12G	AL30-12AB	AL30-12T
	3/4" (19 mm)	1/16" to 1/2" (12.7 mm)	AL30-25A	AL30-25AS	AL30-25B	AL30-25G	AL30-25AB	AL30-25T
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AL30-30A	AL30-30AS	AL30-30B	AL30-30G	AL30-30AB	AL30-30T
	1 3/4" (45 mm)	0 to 1/2" (12.7 mm)	AL30-50A	AL30-50AS	AL30-50B	AL30-50G	AL30-50AB	AL30-50T
	2 1/2" (65 mm)	0 to 1/2" (12.7 mm)	AL30-70A	AL30-70AS	AL30-70B	AL30-70G	AL30-70AB	AL30-70T

For drywall use: screw 2208 and anchor ANC5, ANC5Z. For concrete use: screw 2208 and anchor ANC1



For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2





Tamper proof Aluminum flat Head						
						
Titanium (T)	Dull (A)	Shiny (AS)	Black (B)	Gold (G)	Bronze (AB)	Titanium (T)
AL12-12T	FAH12-12A	FAH12-12AS	FAH12-12B	FAH12-12G	FAH12-12AB	FAH12-12T
AL12-25T	FAH12-25A	FAH12-25AS	FAH12-25B	FAH12-25G	FAH12-25AB	FAH12-25T
AL12-30T	FAH12-30A	FAH12-30AS	FAH12-30B	FAH12-30G	FAH12-30AB	FAH12-30T
AL12-50T	FAH12-50A	FAH12-50AS	FAH12-50B	FAH12-50G	FAH12-50AB	FAH12-50T
AL12-70T	FAH12-70A	FAH12-70AS	FAH12-70B	FAH12-70G	FAH12-70AB	FAH12-70T
AL16-12T	FAH16-12A	FAH16-12AS	FAH16-12B	FAH16-12G	FAH16-12AB	FAH16-12T
AL16-25T	FAH16-25A	FAH16-25AS	FAH16-25B	FAH16-25G	FAH16-25AB	FAH16-25T
AL16-30T	FAH16-30A	FAH16-30AS	FAH16-30B	FAH16-30G	FAH16-30AB	FAH16-30T
AL16-50T	FAH16-50A	FAH16-50AS	FAH16-50B	FAH16-50G	FAH16-50AB	FAH16-50T
AL16-70T	FAH16-70A	FAH16-70AS	FAH16-70B	FAH16-70G	FAH16-70AB	FAH16-70T

AL19-12T	FAH19-12A	FAH19-12AS	FAH19-12B	FAH19-12G	FAH19-12AB	FAH19-12T
AL19-25T	FAH19-25A	FAH19-25AS	FAH19-25B	FAH19-25G	FAH19-25AB	FAH19-25T
AL19-30T	FAH19-30A	FAH19-30AS	FAH19-30B	FAH19-30G	FAH19-30AB	FAH19-30T
AL19-50T	FAH19-50A	FAH19-50AS	FAH19-50B	FAH19-50G	FAH19-50AB	FAH19-50T
AL19-70T	FAH19-70A	FAH19-70AS	FAH19-70B	FAH19-70G	FAH19-70AB	FAH19-70T
AL22-12T	FAH22-12A	FAH22-12AS	FAH22-12B	FAH22-12G	FAH22-12AB	FAH22-12T
AL22-25T	FAH22-25A	FAH22-25AS	FAH22-25B	FAH22-25G	FAH22-25AB	FAH22-25T
AL22-30T	FAH22-30A	FAH22-30AS	FAH22-30B	FAH22-30G	FAH22-30AB	FAH22-30T
AL22-50T	FAH22-50A	FAH22-50AS	FAH22-50B	FAH22-50G	FAH22-50AB	FAH22-50T
AL22-70T	FAH22-70A	FAH22-70AS	FAH22-70B	FAH22-70G	FAH22-70AB	FAH22-70T
AL25-12T	FAH25-12A	FAH25-12AS	FAH25-12B	FAH25-12G	FAH25-12AB	FAH25-12T
AL25-25T	FAH25-25A	FAH25-25AS	FAH25-25B	FAH25-25G	FAH25-25AB	FAH25-25T
AL25-30T	FAH25-30A	FAH25-30AS	FAH25-30B	FAH25-30G	FAH25-30AB	FAH25-30T
AL25-50T	FAH25-50A	FAH25-50AS	FAH25-50B	FAH25-50G	FAH25-50AB	FAH25-50T
AL25-70T	FAH25-70A	FAH25-70AS	FAH25-70B	FAH25-70G	FAH25-70AB	FAH25-70T
AL30-12T	FAH30-12A	FAH30-12AS	FAH30-12B	FAH30-12G	FAH30-12AB	FAH30-12T
AL30-25T	FAH30-25A	FAH30-25AS	FAH30-25B	FAH30-25G	FAH30-25AB	FAH30-25T
AL30-30T	FAH30-30A	FAH30-30AS	FAH30-30B	FAH30-30G	FAH30-30AB	FAH30-30T
AL30-50T	FAH30-50A	FAH30-50AS	FAH30-50B	FAH30-50G	FAH30-50AB	FAH30-50T
AL30-70T	FAH30-70A	FAH30-70AS	FAH30-70B	FAH30-70G	FAH30-70AB	FAH30-70T

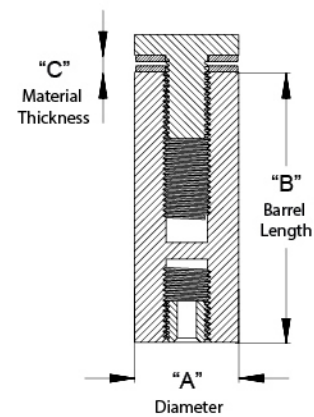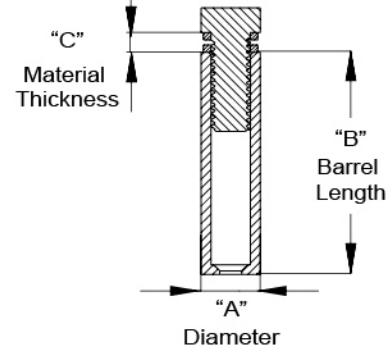

SCREW AND ANCHOR IN 3 EASY STEPS...

1

Screw



2

Mount Head



3

Done Deal!



STILL ON THE FENCE?

Order our new sample box today

**NEW
PRODUCT**




**1 (813) 938-6025
mbs-standoffs.com**

RESELLER/DISTRIBUTOR PROGRAM

MBS is always looking for new distributors.

Contact us to get more information on becoming a distributor.

1-813-938-6025 • sales@mbs-standoffs.com

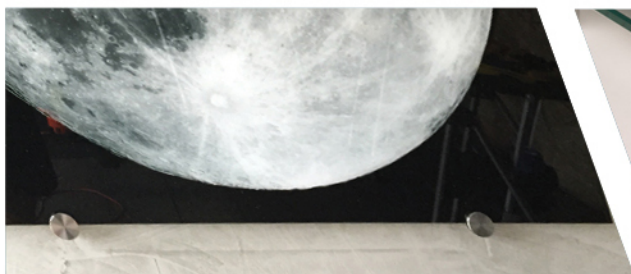

PACKING



All packages are individually inspected multiple times by our certified shipping representatives to ensure your order is nothing less than perfect.



AMERICA'S # 1 CHOICE FOR STANDOFFS

Affordable Colored Aluminum “All In One”

12 Finishes – For Indoor and Outdoor Use

- Wall mounted standoff
- Designed from high quality solid aluminum for indoor & outdoor
- 12 different finishes
- 6 different diameters
- 5 different heights
- Without washers (sold separately)
- Mounting hardware not included



12 DIFFERENT FINISHES



Black
(BK)



Blue
(BL)



Champagne
(BR)



Copper
(CP)



Gold
(GD)



Green
(GN)



Purple
(PL)



Cherry Red
(RD)



Rosy Pink
(RP)



Steel Gray
(SG)



Silver
(SL)



White Coated
(WH)



Affordable Colored Aluminum “All In One”

12 Finishes – For Indoor and Outdoor Use

Diameter 'A'	Standoff 'B'	Material Thickness 'C'	High Quality Alum					
								
1/2"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS12-12BK	AS12-12BL	AS12-12BR	AS12-12CP	AS12-12GD	AS12-12GN
	3/4" (19.0 mm)	1/8" to 1/2" (12.7 mm)	AS12-25BK	AS12-25BL	AS12-25BR	AS12-25CP	AS12-25GD	AS12-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS12-30BK	AS12-30BL	AS12-30BR	AS12-30CP	AS12-30GD	AS12-30GN
	1 1/2" (31.75 mm)	0 to 1/2" (12.7 mm)	AS12-38BK	AS12-38BL	AS12-38BR	AS12-38CP	AS12-38GD	AS12-38GN
	2" (50.8 mm)	0 to 1/2" (12.7 mm)	AS12-50BK	AS12-50BL	AS12-50BR	AS12-50CP	AS12-50GD	AS12-50GN
5/8"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS16-12BK	AS16-12BL	AS16-12BR	AS16-12CP	AS16-12GD	AS16-12GN
	3/4" (19.0 mm)	1/8" to 1/2" (12.7 mm)	AS16-25BK	AS16-25BL	AS16-25BR	AS16-25CP	AS16-25GD	AS16-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS16-30BK	AS16-30BL	AS16-30BR	AS16-30CP	AS16-30GD	AS16-30GN
	1 1/2" (31.75 mm)	0 to 1/2" (12.7 mm)	AS16-38BK	AS16-38BL	AS16-38BR	AS16-38CP	AS16-38GD	AS16-38GN
	2" (50.8 mm)	0 to 1/2" (12.7 mm)	AS16-50BK	AS16-50BL	AS16-50BR	AS16-50CP	AS16-50GD	AS16-50GN

For drywall use: screw 2208 and anchor ANC5, ANC5Z. For concrete use: screw 2208 and anchor ANC1

3/4"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS19-12BK	AS19-12BL	AS19-12BR	AS19-12CP	AS19-12GD	AS19-12GN
	3/4" (19.0 mm)	1/8" to 1/2" (12.7 mm)	AS19-25BK	AS19-25BL	AS19-25BR	AS19-25CP	AS19-25GD	AS19-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS19-30BK	AS19-30BL	AS19-30BR	AS19-30CP	AS19-30GD	AS19-30GN
	1 1/2" (31.75 mm)	0 to 1/2" (12.7 mm)	AS19-38BK	AS19-38BL	AS19-38BR	AS19-38CP	AS19-38GD	AS19-38GN
	2" (50.8 mm)	0 to 1/2" (12.7 mm)	AS19-50BK	AS19-50BL	AS19-50BR	AS19-50CP	AS19-50GD	AS19-50GN
1"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS25-12BK	AS25-12BL	AS25-12BR	AS25-12CP	AS25-12GD	AS25-12GN
	3/4" (19.0 mm)	1/8" to 1/2" (12.7 mm)	AS25-25BK	AS25-25BL	AS25-25BR	AS25-25CP	AS25-25GD	AS25-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS25-30BK	AS25-30BL	AS25-30BR	AS25-30CP	AS25-30GD	AS25-30GN
	1 1/2" (31.75 mm)	0 to 1/2" (12.7 mm)	AS25-38BK	AS25-38BL	AS25-38BR	AS25-38CP	AS25-38GD	AS25-38GN
	2" (50.8 mm)	0 to 1/2" (12.7 mm)	AS25-50BK	AS25-50BL	AS25-50BR	AS25-50CP	AS25-50GD	AS25-50GN
1 1/4"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS30-12BK	AS30-12BL	AS30-12BR	AS30-12CP	AS30-12GD	AS30-12GN
	3/4" (19 mm)	1/8" to 1/2" (12.7 mm)	AS30-25BK	AS30-25BL	AS30-25BR	AS30-25CP	AS30-25GD	AS30-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS30-30BK	AS30-30BL	AS30-30BR	AS30-30CP	AS30-30GD	AS30-30GN
	1 1/2" (31.75)	0 to 1/2" (12.7 mm)	AS30-38BK	AS30-38BL	AS30-38BR	AS30-38CP	AS30-38GD	AS30-38GN
	2" (50.80mm)	0 to 1/2" (12.7 mm)	AS30-50BK	AS30-50BL	AS30-50BR	AS30-50CP	AS30-50GD	AS30-50GN
2"	1/2" (12.7 mm)	1/4" (6.3 mm)	AS50-12BK	AS50-12BL	AS50-12BR	AS50-12CP	AS50-12GD	AS50-12GN
	3/4" (19.0 mm)	1/8" to 1/2" (12.7 mm)	AS50-25BK	AS50-25BL	AS50-25BR	AS50-25CP	AS50-25GD	AS50-25GN
	1" (25.4 mm)	0 to 1/2" (12.7 mm)	AS50-30BK	AS50-30BL	AS50-30BR	AS50-30CP	AS50-30GD	AS50-30GN
	1 1/2" (31.75 mm)	0 to 1/2" (12.7 mm)	AS50-38BK	AS50-38BL	AS50-38BR	AS50-38CP	AS50-38GD	AS50-38GN
	2" (50.8 mm)	0 to 1/2" (12.7 mm)	AS50-50BK	AS50-50BL	AS50-50BR	AS50-50CP	AS50-50GD	AS50-50GN

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2



AMERICA'S # 1 CHOICE FOR STANDOFFS



- Sample box
- SKU: ASSAMPBOX



**NEW
PRODUCT**

Aluminum "All In One"



AS12-12PL	AS12-12RD	AS12-12RP	AS12-12SG	AS12-12SL	AS12-12WH
AS12-25PL	AS12-25RD	AS12-25RP	AS12-25SG	AS12-25SL	AS12-25WH
AS12-30PL	AS12-30RD	AS12-30RP	AS12-30SG	AS12-30SL	AS12-30WH
AS12-38PL	AS12-38RD	AS12-38RP	AS12-38SG	AS12-38SL	AS12-38WH
AS12-50PL	AS12-50RD	AS12-50RP	AS12-50SG	AS12-50SL	AS12-50WH
AS16-12PL	AS16-12RD	AS16-12RP	AS16-12SG	AS16-12SL	AS16-12WH
AS16-25PL	AS16-25RD	AS16-25RP	AS16-25SG	AS16-25SL	AS16-25WH
AS16-30PL	AS16-30RD	AS16-30RP	AS16-30SG	AS16-30SL	AS16-30WH
AS16-38PL	AS16-38RD	AS16-38RP	AS16-38SG	AS16-38SL	AS16-38WH
AS16-50PL	AS16-50RD	AS16-50RP	AS16-50SG	AS16-50SL	AS16-50WH

AS19-12PL	AS19-12RD	AS19-12RP	AS19-12SG	AS19-12SL	AS19-12WH
AS19-25PL	AS19-25RD	AS19-25RP	AS19-25SG	AS19-25SL	AS19-25WH
AS19-30PL	AS19-30RD	AS19-30RP	AS19-30SG	AS19-30SL	AS19-30WH
AS19-38PL	AS19-38RD	AS19-38RP	AS19-38SG	AS19-38SL	AS19-38WH
AS19-50PL	AS19-50RD	AS19-50RP	AS19-50SG	AS19-50SL	AS19-50WH
AS25-12PL	AS25-12RD	AS25-12RP	AS25-12GD	AS25-12SL	AS25-12WH
AS25-25PL	AS25-25RD	AS25-25RP	AS25-25GD	AS25-25SL	AS25-25WH
AS25-30PL	AS25-30RD	AS25-30RP	AS25-30GD	AS25-30SL	AS25-30WH
AS25-38PL	AS25-38RD	AS25-38RP	AS25-38GD	AS25-38SL	AS25-38WH
AS25-50PL	AS25-50RD	AS25-50RP	AS25-50GD	AS25-50SL	AS25-50WH
AS30-12PL	AS30-12RD	AS30-12RP	AS30-12SG	AS30-12SL	AS30-12WH
AS30-25PL	AS30-25RD	AS30-25RP	AS30-25SG	AS30-25SL	AS30-25WH
AS30-30PL	AS30-30RD	AS30-30RP	AS30-30SG	AS30-30SL	AS30-30WH
AS30-38PL	AS30-38RD	AS30-38RP	AS30-38SG	AS30-38SL	AS30-38WH
AS30-50PL	AS30-50RD	AS30-50RP	AS30-50SG	AS30-50SL	AS30-50WH
AS50-12PL	AS50-12RD	AS50-12RP	AS50-12SG	AS50-12SL	AS50-12WH
AS50-25PL	AS50-25RD	AS50-25RP	AS50-25SG	AS50-25SL	AS50-25WH
AS50-30PL	AS50-30RD	AS50-30RP	AS50-30SG	AS50-30SL	AS50-30WH
AS50-38PL	AS50-38RD	AS50-38RP	AS50-38SG	AS50-38SL	AS50-38WH
AS50-50PL	AS50-50RD	AS50-50RP	AS50-50SG	AS50-50SL	AS50-50WH

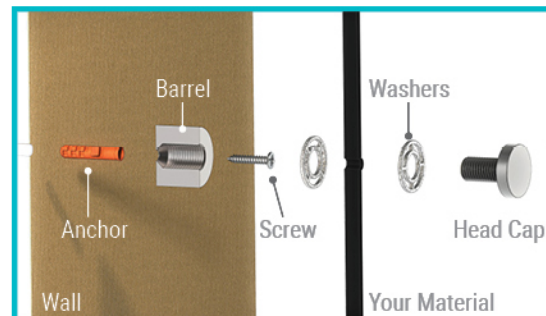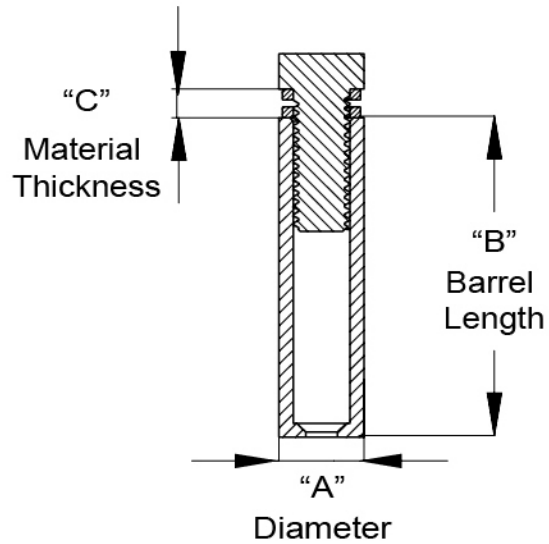

1. Insert anchor in wall
2. Add the screw through the barrel and into the anchor
3. Place washer on top of barrel
4. Align material on top of washer and add top washer
5. Take cap/stud, go through washers, material and screw into barrel

Inexpensive Stainless Steel “All In One”

2 Finishes – 3 Different Stainless Steel Grades

- Wall mounted standoff
- Designed from high quality solid stainless steel for indoor & outdoor use
- Satin brushed and polished
- 6 different diameters
- 5 different heights
- Protective washers included
- Mounting hardware not included



201 STAINLESS STEEL GRADE

Inside Use

Whitout
Locking
Screw



304 STAINLESS STEEL GRADE

Inside & Outside Use
With Locking Screw



316 MARINE STAINLESS STEEL GRADE

Inside & Outside Use
With Locking Screw





THICK MATERIAL

Extended head allows for
3/4" to 1"



Available in:
3/4", 7/8", 1" & 1 1/4"
diameter

Standoff technical diagram

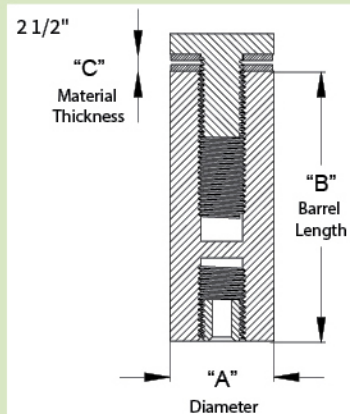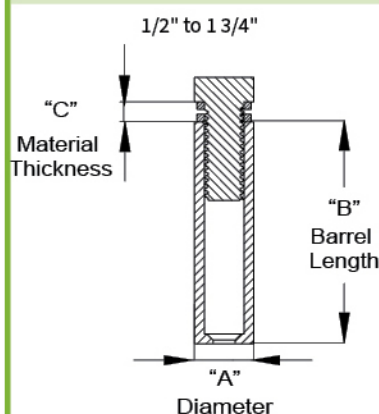

Inexpensive Stainless Steel “All In One”

2 Finishes – 3 Different Grades of Stainless Steel: 201 for indoor use, 304 & 316 Marine Grade for both indoor and outdoor use

Diameter 'A'	Standoff 'B'	Material Thickness 'C'	201 Grade Whitout Locking Screw		304 Grade With Locking Screw		316 Marine Grade With Locking Screw	
								
1/2"	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS12-12	SBLP12-12	LBLS12-12	LBLP12-12	316LBLS12-12	316LBLP12-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS12-25	SBLP12-25	LBLS12-25	LBLP12-25	316LBLS12-25	316LBLP12-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS12-30	SBLP12-30	LBLS12-30	LBLP12-30	316LBLS12-30	316LBLP12-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS12-50	SBLP12-50	LBLS12-50	LBLP12-50	316LBLS12-50	316LBLP12-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS12-70	SBLP12-70	LBLS12-70	LBLP12-70	316LBLS12-70	316LBLP12-70'
3/8" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS16-12	SBLP16-12	LBLS16-12	LBLP16-12	316LBLS16-12	316LBLP16-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-25	SBLP16-25	LBLS16-25	LBLP16-25	316LBLS16-25	316LBLP16-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-30	SBLP16-30	LBLS16-30	LBLP16-30	316LBLS16-30	316LBLP16-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-50	SBLP16-50	LBLS16-50	LBLP16-50	316LBLS16-50	316LBLP16-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-70	SBLP16-70	LBLS16-70	LBLP16-70	316LBLS16-70	316LBLP16-70'
5/8"	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS16-12	SBLP16-12	LBLS16-12	LBLP16-12	316LBLS16-12	316LBLP16-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-25	SBLP16-25	LBLS16-25	LBLP16-25	316LBLS16-25	316LBLP16-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-30	SBLP16-30	LBLS16-30	LBLP16-30	316LBLS16-30	316LBLP16-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-50	SBLP16-50	LBLS16-50	LBLP16-50	316LBLS16-50	316LBLP16-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS16-70	SBLP16-70	LBLS16-70	LBLP16-70	316LBLS16-70	316LBLP16-70'
7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS19-12	SBLP19-12	LBLS19-12	LBLP19-12	316LBLS19-12	316LBLP19-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS19-25	SBLP19-25	LBLS19-25	LBLP19-25	316LBLS19-25	316LBLP19-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS19-30	SBLP19-30	LBLS19-30	LBLP19-30	316LBLS19-30	316LBLP19-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS19-50	SBLP19-50	LBLS19-50	LBLP19-50	316LBLS19-50	316LBLP19-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS19-70	SBLP19-70	LBLS19-70	LBLP19-70	316LBLS19-70	316LBLP19-70'
3/4"	Extended Head	1" (25.4 mm)	S19SSS	S19SSP	S19SS304	S19SP304'	S19SS316'	S19SP316'
	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS22-12	SBLP22-12	LBLS22-12	LBLP22-12	316LBLS22-12	316LBLP22-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS22-25	SBLP22-25	LBLS22-25	LBLP22-25	316LBLS22-25	316LBLP22-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS22-30	SBLP22-30	LBLS22-30	LBLP22-30	316LBLS22-30	316LBLP22-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS22-50	SBLP22-50	LBLS22-50	LBLP22-50	316LBLS22-50	316LBLP22-50'
7/8"	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS22-70	SBLP22-70	LBLS22-70	LBLP22-70	316LBLS22-70	316LBLP22-70'
	Extended Head	1" (25.4 mm)	S22SSS	S22SSP	S22SS304	S22SP304'	S22SS316'	S22SP316'
	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS25-12	SBLP25-12	LBLS25-12	LBLP25-12	316LBLS25-12	316LBLP25-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS25-25	SBLP25-25	LBLS25-25	LBLP25-25	316LBLS25-25	316LBLP25-25'
	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS25-30	SBLP25-30	LBLS25-30	LBLP25-30	316LBLS25-30	316LBLP25-30'
1"	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS25-50	SBLP25-50	LBLS25-50	LBLP25-50	316LBLS25-50	316LBLP25-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS25-70	SBLP25-70	LBLS25-70	LBLP25-70	316LBLS25-70	316LBLP25-70'
	Extended Head	1" (25.4 mm)	S25SSS	S25SSP	S25SS304	S25SP304'	S25SS316'	S25SP316'
	1/2" (12.7 mm)	1/4" (6.35 mm)	SBLS30-12	SBLP30-12	LBLS30-12	LBLP30-12	316LBLS30-12	316LBLP30-12'
	3/4" (19.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS30-25	SBLP30-25	LBLS30-25	LBLP30-25	316LBLS30-25	316LBLP30-25'
1 1/4"	1" (25.4 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS30-30	SBLP30-30	LBLS30-30	LBLP30-30	316LBLS30-30	316LBLP30-30'
	1 3/4" (45.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS30-50	SBLP30-50	LBLS30-50	LBLP30-50	316LBLS30-50	316LBLP30-50'
	2 1/2" (65.0 mm)	3/16" (4 mm) to 1/2" (12.7 mm)	SBLS30-70	SBLP30-70	LBLS30-70	LBLP30-70	316LBLS30-70	316LBLP30-70'
	Extended Head	1 1/4" (30 mm)	S30SSS	S30SSP	S30SS304	S30SP304'	S30SS316'	S30SP316'

For drywall use: screw 2208 and anchor ANC5, ANC5Z. For concrete use: screw 2208 and anchor ANC1

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2

*Available upon request minimum order quantity 100

Tamper Proof Stainless Steel “All In One”

2 Finishes – For Indoor and Outdoor Use


- Wall mounted standoff
- Designed from high quality solid stainless steel for indoor and outdoor use
- Satin brushed and polished
- Set screw to lock head in place
- 6 different diameters
- 5 different heights
- Protective washers included
- Requires 2 mm (M4) Allen key
- Mounting hardware not included



Satin Brushed



Polished

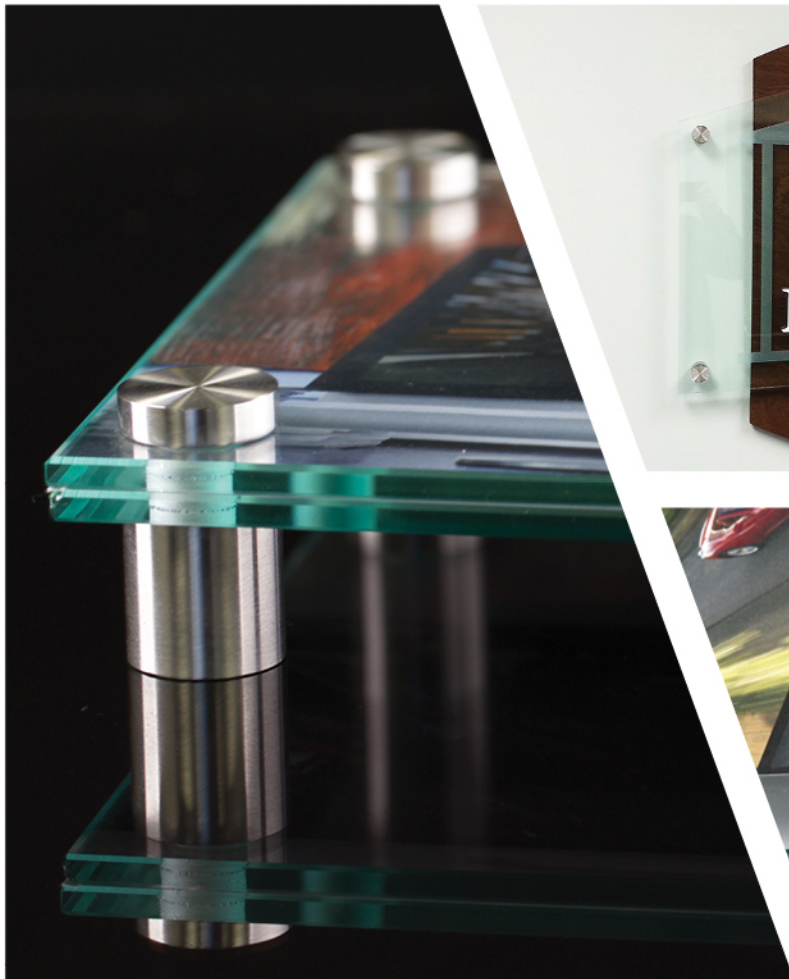

Special Standoffs

3 Finishes – For Indoor and Outdoor Use

- Wall mounted standoffs
- Designed from high quality solid aluminum
- 3 different finishes
- 2 different heights
- Protective washer included
- Set screw to lock in place
- Requires 2mm (m4) Allen key
- Mounting hardware not included



Diameter	Standoff	Material Thickness	Aluminum Finish		
					
5/8" 3/8" Hole Diameter (to be drilled in material)	7/8"(22 mm)	1/2"(12.7 mm)	1623A	1623AS	1623GS
7/8" 3/8" Hole Diameter (to be drilled in material)	1"(25.4mm)	9/16"(14 mm)	2327A	2327AS	2327GS



Tamper Proof Clear Acrylic Flat Head Standoffs

2 Finishes – For Indoor and Outdoor Use

- Wall mounted standoffs
- Designed from high quality solid Acrylic for indoor and outdoor use
- 2 different finishes
- 4 different diameters
- 5 different heights
- Protective washers included
- Tamper Proof by Reverse Thread
- Mounting hardware not included



2 DIFFERENT FINISHES



Clear



White

Diameter	Standoff	Material Thickness Accepted	Acrylic	
			Clear	White
1/2" 3/8" Hole Diameter (to be drilled in material)	1/2" (12.7mm)	0" to 1/4" (6.3 mm)	ACS12-12C	ACS12-12W
	3/4" (19.0mm)	1/8" to 1/2" (12.7 mm)	ACS12-25C	ACS12-25W
	1" (25.4 mm)		ACS12-30C	ACS12-30W
	1 3/4" (45.0 mm)	0" to 1/2" (12.7 mm)	ACS12-50C	ACS12-50W
	2 1/2" (65.0 mm)		ACS12-70C	ACS12-70W
5/8" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7mm)	0" to 1/4" (6.3 mm)	ACS16-12C	ACS16-12W
	3/4" (19.0mm)	1/8" to 1/2" (12.7 mm)	ACS16-25C	ACS16-25W
	1" (25.4 mm)		ACS16-30C	ACS16-30W
	1 3/4" (45.0 mm)	0" to 1/2" (12.7 mm)	ACS16-50C	ACS16-50W
	2 1/2" (65.0 mm)		ACS16-70C	ACS16-70W
3/4" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7mm)	0" to 1/4" (6.3 mm)	ACS19-12C	ACS19-12W
	3/4" (19.0mm)	1/8" to 1/2" (12.7 mm)	ACS19-25C	ACS19-25W
	1" (25.4 mm)		ACS19-30C	ACS19-30W
	1 3/4" (45.0 mm)	0" to 1/2" (12.7 mm)	ACS19-50C	ACS19-50W
	2 1/2" (65.0 mm)		ACS19-70C	ACS19-70W
1" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7mm)	0" to 1/4" (6.3 mm)	ACS25-12C	ACS25-12W
	3/4" (19.0mm)	1/8" to 1/2" (12.7 mm)	ACS25-25C	ACS25-25W
	1" (25.4 mm)		ACS25-30C	ACS25-30W
	1 3/4" (45.0 mm)	0" to 1/2" (12.7 mm)	ACS25-50C	ACS25-50W
	2 1/2" (65.0 mm)		ACS25-70C	ACS25-70W

Flat Head (1/16" cap height) Standoffs

- Wall mounted standoffs
- Designed from solid stainless steel or aluminum
- 3 different diameters
- 3 different heights for each diameter
- Mounting hardware not included
- Requires 2 mm (M4) Allen Key



3 DIFFERENT FINISHES



Clear
Anodized



Black
Anodized



Brushed



Diameter	Standoff	Material Thickness Accepted	Aluminum		Stainless Steel	
			 Clear Anodized	 Black Anodized	 Brushed Indoor Use	 Brushed Indoor / Outdoor Use
1/2"	5/16" (7.93 mm)	1/16" (1.58 mm)	GS050-050A	GS050-050B	GS050-050S	GS050-050S304
	1" (25.4 mm)	1/2" (12.7 mm)	GS050-100A	GS050-100B	GS050-100S	GS050-100S304
	2" (50.8 mm)	1/2" (12.7 mm)	GS050-200A	GS050-200B	GS050-200S	GS050-200S304
3/4"	5/16" (7.93 mm)	1/16" (1.58 mm)	GS075-050A	GS075-050B	GS075-050S	GS075-050S304
	1" (25.4 mm)	1/2" (12.7 mm)	GS075-100A	GS075-100B	GS075-100S	GS075-100S304
	2" (50.8 mm)	1/2" (12.7 mm)	GS075-200A	GS075-200B	GS075-200S	GS075-200S304
1"	5/16" (7.93 mm)	1/16" (1.58 mm)	GS100-050A	GS100-050B	GS100-050S	GS100-050S304
	1" (25.4 mm)	1/2" (12.7 mm)	GS100-100A	GS100-100B	GS100-100S	GS100-100S304
	2" (50.8 mm)	1/2" (12.7 mm)	GS100-200A	GS100-200B	GS100-200S	GS100-200S304

1/2" diameter — for drywall use: screw 2208 and ANC5, ANC5Z. For concrete use: ANC1

3/4" and 1" diameter — for drywall use: screw 2216 and ANC6, ANC6Z. For concrete use: ANC2

Required Material Hole Size: 5/16"

Hollow Stainless Steel Standoffs

For Indoor Use Only

- Wall mounted standoffs
- Designed from hollow stainless steel for indoor use
- Satin brushed
- 6 different diameters
- 5 different heights
- Protective washers included
- Mounting hardware not included



Diameter	Standoff	Material Thickness	Stainless Steel Satin Brushed
1/2" 3/8" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS12-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS12-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS12-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS12-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS12-70

For drywall use: screw 2208 and anchor ANC5, ANC5Z. For concrete use: screw 2208 and anchor ANC1

5/8" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS16-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS16-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS16-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS16-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS16-70

Both 1/2" diameter and 5/8" diameter use the 2208, ANC5, ANC5Z, & ANC1

3/4" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS19-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS19-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS19-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS19-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS19-70
7/8" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS22-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS22-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS22-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS22-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS22-70
1" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS25-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS25-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS25-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS25-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS25-70
1 1/4" 7/16" Hole Diameter (to be drilled in material)	1/2" (12.7 mm)	1/4" (6.35 mm)	HBLS30-12
	3/4" (19.0 mm)	1/2" (12.7 mm)	HBLS30-25
	1" (25.4 mm)	1/2" (12.7 mm)	HBLS30-30
	1 3/4" (45.0 mm)	1/2" (12.7 mm)	HBLS30-50
	2 1/2" (65.0 mm)	1/2" (12.7 mm)	HBLS30-70

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2



Special Satin Stainless Steel Standoffs

9/16" Diameter – For Indoor and Outdoor Use



- Wall mounted standoffs
- Designed from high quality stainless steel
- With set screw to lock in place
- Satin brushed finish
- Grooved cap for security
- 2 different heights
- 3 different heads
- Protective washers included
- Requires 2 mm (M4) Allen Key



3 DIFFERENT HEADS



Flat Head




Rounded Head




Conical Head

9/16" (14 mm) Diameter Standoff

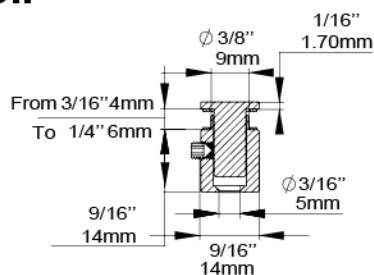

9/16" (14 mm) Diameter Standoff

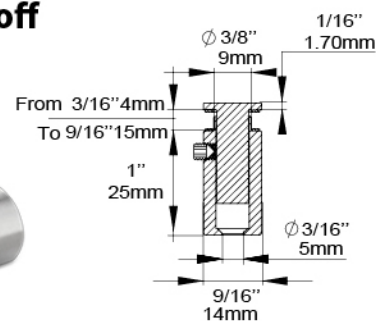

Head	Indoor Use	Outdoor Use
Flat	PFI14.15	PFI14.15S
Rounded	PFI14.15R	None
Conical	PFI14.15C	None

Use for drywall: screw 2208 and anchor ANC5, ANC5Z

Use for concrete: screw 2208 and anchor ANC1

Thickness of material accepted: minimum 1/8" (3 mm), maximum 1/4" (6 mm)

Hole diameter to be drilled in your material: 3/8"

Head	Indoor Use	Outdoor Use
Flat	PFI14.25	PFI14.25S
Rounded	PFI14.25R	None
Conical	PFI14.25C	None

Use for drywall: screw 2208 and anchor ANC5, ANC5Z

Use for concrete: screw 2208 and anchor ANC1

Thickness of material accepted: minimum 1/8" (3 mm), maximum 9/16" (15 mm)


Hole diameter to be drilled in your material: 3/8"

Special Satin Stainless Steel Standoffs


For Indoor and Outdoor Use

- Wall mounted standoffs
- Designed from high quality stainless steel
- Set screw to lock in place
- Requires 2 mm (M4) Allen Key

2 DIFFERENT HEADS



Standard Head



Flat Head



3/4" (19 mm) Diameter 1" (25 mm) Standoff


Head	Cap Height	Indoor Use	Outdoor Use
Standard	3/16" Thick	PFI19.25ST	PFI19.25SST
Flat	1/16" Thick	PFI19.25FL	None

Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted:
minimum 1/8" (3 mm), maximum 5/8" (16 mm)

Hole diameter to be drilled in your material: 3/8"

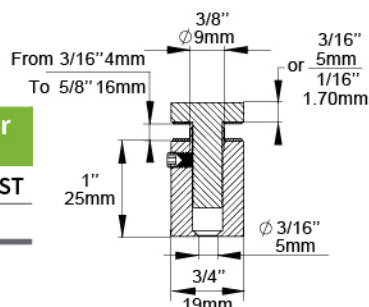

1" (25 mm) Diameter 1" (25 mm) Standoff


Head	Cap Height	Indoor Use	Outdoor Use
Standard	3/16" Thick	PFI25.25ST	PFI25.25SST
Flat	1/16" Thick	PFI25.25FL	None

Use for drywall: screw 2216 and anchor ANC6, ANC6Z



Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted:
minimum 1/8" (3 mm), maximum 5/8" (16 mm)

Hole diameter to be drilled in your material: 3/8"

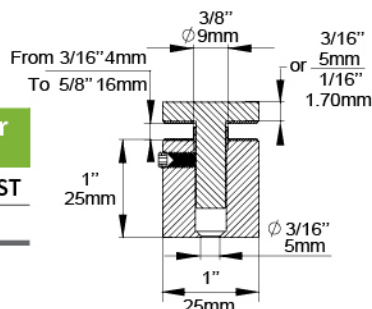

INSTALLATION GUIDE

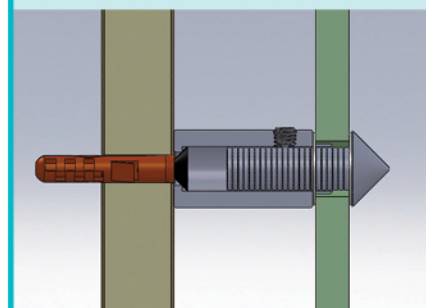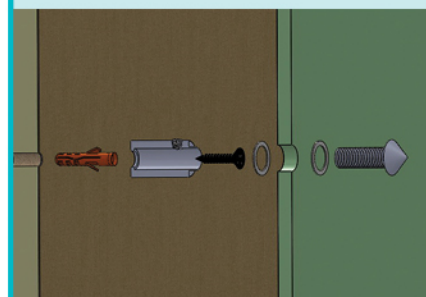


1. Insert anchor into wall
2. Add the screw through the barrel and into the anchor
3. Place washer on top of barrel
4. Align material on top of washer and add top washer
5. Take cap/stud, go through washers, material and screw into barrel

See Screw and Anchor page 9

Stainless Steel Square Standoffs

For Indoor and Outdoor Use

- Wall mounted standoffs
- Designed from high quality stainless steel
- Has a set screw to lock in place
- Satin brushed finish
- Has a grooved cap for security
- 3 different square sizes
- 3 different heights
- Protective washers included
- Requires 2 mm (M4) Allen Key

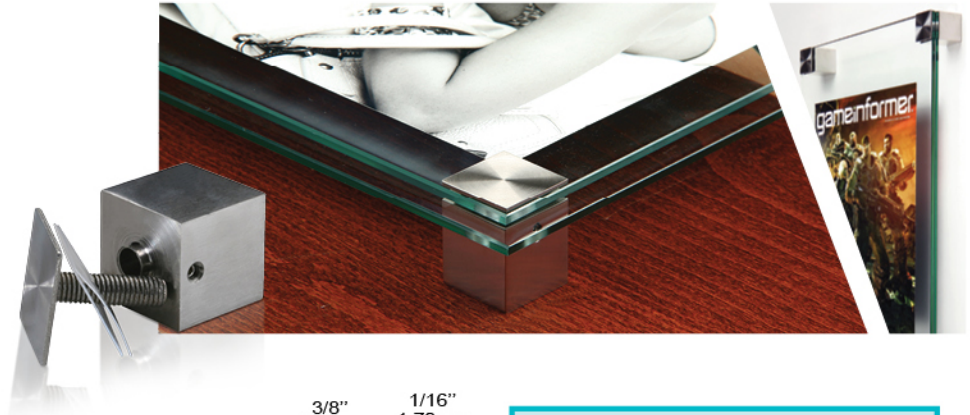

9/16" (14 mm) Square Standoff




Standoff	Indoor Use	Outdoor Use
9/16" (14 mm)	CPFI14.14	N/A

Use for drywall: screw 2208 and anchor ANC5, ANC5Z

Use for concrete: screw 2208 and anchor ANC1

Hole diameter to be drilled in your material: 3/8"

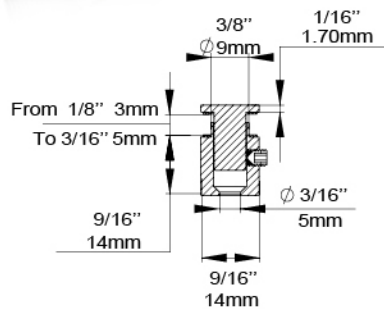

7/8" (22 mm) Square Standoff




Standoff	Indoor Use	Outdoor Use
7/8" (22 mm)	CPFI22.22	CPFI22.22S

Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Hole diameter to be drilled in your material: 3/8"

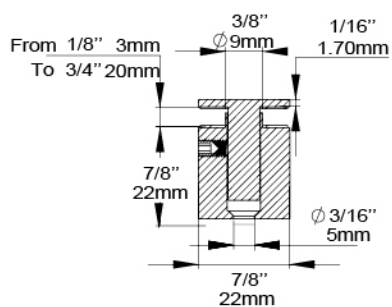

1 3/16" (30 mm) Square Standoff




Standoff	Indoor Use	Outdoor Use
1 3/16" (30 mm)	CPFI30.30	CPFI30.30S



Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Hole diameter to be drilled in your material: 3/8"

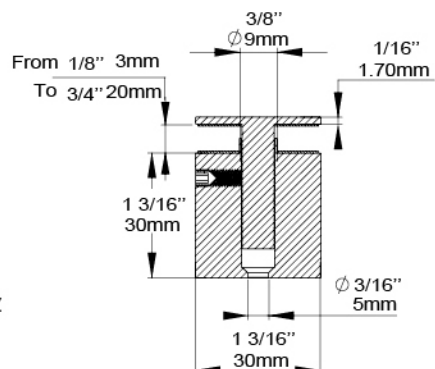

INSTALLATION GUIDE

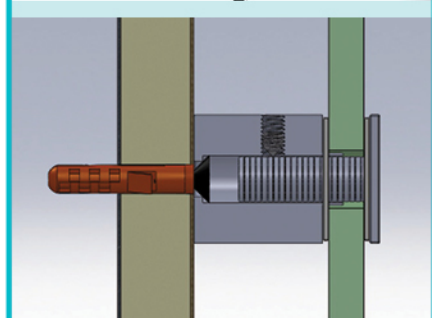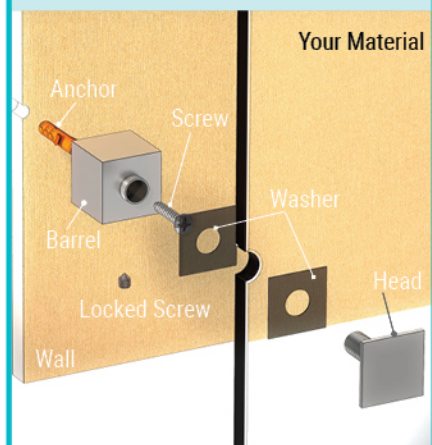



1. Insert anchor into wall
2. Add the screw through the barrel and into the anchor
3. Place washer on top of barrel
4. Align material on top of washer and add top washer
5. Take cap/stud, go through washers, material and screw into barrel

See Screw and Anchor page 9

LED Standoffs

- Available in 2 or 4 pieces per kit
- 0.4 Watts per Standoff
- Transformer 120V included
- For the best lighting effect, drill a 7/8" hole in the acrylic



Diameter	Standoff	Material Thickness	Quantity Per Set			
1"			2 Pieces	LS2W25-25A	LS2B25-25A	LS2R25-25A
7/8" Hole Diameter (to be drilled in material)	1" (25.4 mm)	3/16" to 1/2"	4 Pieces	LS4W25-25A	LS4B25-25A	LS4R25-25A

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2



LED SIGN CLAMP Also Available. Page 34



Desktop Standoffs

- Desk standoffs
- Designed from high quality stainless steel
- Set screw to lock in place
- Felt pad base / bottom



Full Set with Glass
Item# FSD1



1/2" (12.7 mm) Diameter Desktop Standoffs



Diameter	Head	Angle	Clear Aluminum	Matte Black	Stainless Steel
1/2" (12.7 mm)	Flat 0.08"	60°	100.008A	100.008MB	100.008
1/2" (12.7 mm)	Flat 0.08"	0°			100.007


Thickness of material accepted for SS: 2 × 3/16" or 1 × 3/8" (2 × 4 mm or 9.53 mm)

for Aluminum: Up to 3/8" (10 mm)

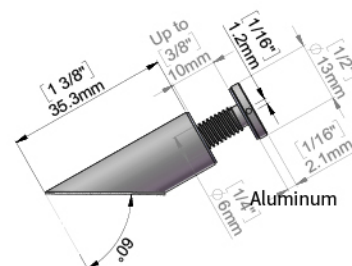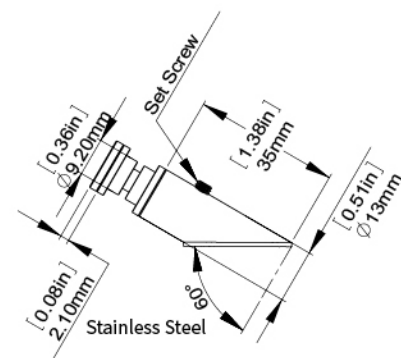


Full Set with Glass
Item# FSD3

1/2" (12.7 mm) Diameter Desktop Standoffs

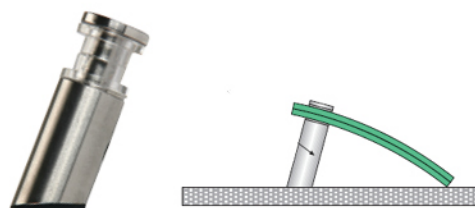


Diameter	Angle	Head	Item #
1/2" (12.7 mm)	30°	Rounded	100.102
1/2" (12.7 mm)	30°	Flat	100.002

Thickness of material accepted: 2 × 3/16" or 1 × 3/8" (2 × 4 mm or 9.53 mm)

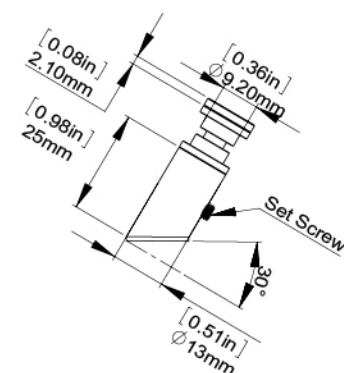


Material Connector

Diameter	Head	Material Thick	Clear Aluminum	Black Anodized	Stainless Steel
3/8" (10 mm)	Flat 1/4"	5/16" to 1/2"	MC038A	MC038B	MC038S
3/8" (10 mm)	Flat 1/16"	1/4" to 3/8"	MCS038A	MCS038B	MCS038S
1/2" (12.7 mm)	Flat 1/16"	3/16" to 3/8"	N/A	N/A	100.020

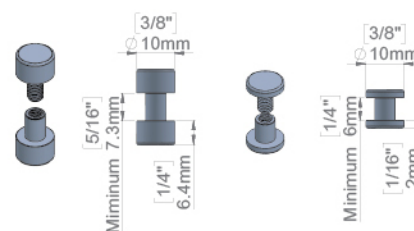

Desktop Standoffs

5/16" (8 mm) Diameter Desktop Standoffs



Diameter	Thickness	Head	Item #
3/16" (5 mm)	3/16" to 3/8"	Flat	102.005

Thickness of material accepted: 1/8" to 3/8" (4 mm to 10 mm)


5/16" (8 mm) Diameter Desktop Standoffs




Description	Length	Material Thickness Accepted	Aluminum				Stainless Steel
			 Dull	 Shiny	 Black	 Gold	 Satin
Cylinder Desktop Standoffs	2" (50.8 mm)	up to 3/8" (9.5 mm)**	102.001A	102.001AS	102.001B	102.001G	102.001
	3 1/16" (77.7 mm)	up to 3/8" (9.5 mm)**	102.002A	102.002AS	102.002B*	102.002G	102.002
Material Connector	1/4" (6.3 mm)	1/4" to 3/8" (9.5 mm)**	102.003A	102.003AS	102.003B	102.003G	102.003
Conical Desktop Standoffs	2 3/4" (70.0 mm)	up to 3/8" (9.5 mm)**	102.004A	102.004AS	102.004B	102.004G	102.004

* Also Available in Matte Black

** Can be adjusted with different set screw



102.001





SECTION B-B

SECTION A-A




102.004

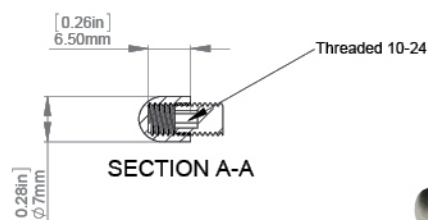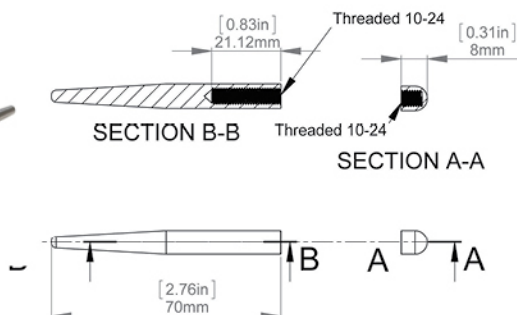

SECTION A-A



102.003

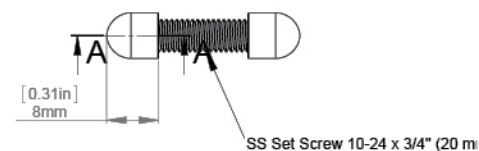

SS Set Screw 10-24 x 3/4" (20 mm)

Desktop Standoffs with Acrylic

- 5 finishes
- Aluminum or stainless steel desktop standoffs
- Usable vertically or horizontally for 8.5" x 11" Insert



Conical



Cylinder

Without Standoffs
Item # AC12510

Description	Sizes	Insert Sizes	Aluminum				Stainless Steel
			Dull	Shiny	Black	Gold	Satin
Clear Acrylic Frame Kit with 3" Clear Anodized Aluminum Rounded Desktop Standoffs	12 1/2" x 10"	8.5" x 11"	AC12510-3A	AC12510-3AS	AC12510-3B	AC12510-3G	AC12510-3SS
Clear Acrylic Frame Kit with 3" Clear Anodized Aluminum Conical Desktop Standoffs	12 1/2" x 10"	8.5" x 11"	AC12510-3TA	AC12510-3TAS	AC12510-3TB	AC12510-3TG	AC12510-3TSS

Cell Phone / Tablet Standoffs



Parts included:

- (2) Wall Pegs
- (2) Washers*
- (2) Dry Wall Screws
- (2) Plastic Anchors
- (1) Mini Allen Wrench

The **Royal Stand**
A Cell Phone Standoffs by **MBS**



Our phones are apart of us and we need to protect them.

It is time to take a stand against losing your phone to the toilet.
Safely secure your phone on The Royal Stand.


Nobody wants to fish their phone out




The Royal Stand prevents your



The **Royal Stand**
A Cell Phone Standoffs by **MBS**

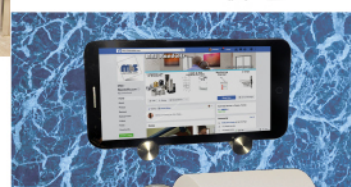

Description	Diameter	Distance from the Wall	Aluminum					
			Dull	Mirror	Matte Black	Bronze	Titanium	Gold
Set of 2 pieces of Cell Phone / Tablet Standoffs	5/8"	1 3/16"	CP058A	CP058AP	CP058MB	CP058AB	CP058T	CP058G





Signage Glass

Flat, Curved, Drilled, No Drilled Options

Glass Type	Glass Size	Distance From Wall	# of Holes	Item #
Flat	6" x 3 1/8"	2/3"	2	FS1
Flat	6" x 3 1/8"	1 1/16"	2	FS3
Curved	5 15/16" x 5 15/16"	1"	4	FS17

Glass Type	Glass Size	Thickness	# of Holes	Item #
Flat	8 1/2" x 5 1/2"	0.16" (4mm)	N/A	200.090
Flat	6" x 6" x 5/32"	0.16" (4mm)	4	200.303
Flat	8" x 8 5/32"	0.16" (4mm)	4	200.305
Flat	10" x 10"	0.16" (4mm)	4	200.307
Flat	5" x 5"	0.16" (4mm)	4	200.332
Flat	6" x 3 1/8" x 0.157"	0.16" (4mm)	2	250.011
Flat	6" x 4" x 5/32"	0.16" (4mm)	2	250.013.A
Flat	6" x 3 1/8" x 5/32"	0.16" (4mm)	2	250.029.A
Flat	8 1/2" x 11"	0.13" (3.18mm)	N/A	250.330
Flat	10 1/2" x 13"	0.16" (4mm)	4	250.342
Flat	17" x 11"	0.16" (4mm)	N/A	250.360
Flat	17" x 11"	0.16" (4mm)	4	250.361
Flat	19 3/8" x 13 3/8"	0.16" (4mm)	N/A	250.370
Flat	19 3/8" x 13 3/8"	0.16" (4mm)	4	250.371
Flat	10" x 2"	-	2	260.110
Flat	12" x 2"	-	2	260.120
Flat	8" x 3" x 5/32"	0.16" (4mm)	2	260.130
Flat	10" x 3" x 5/32"	0.16" (4mm)	2	260.140
Flat	12" x 3"	0.16" (4mm)	2	260.150
Flat	12" x 4" x 5/32"	-	2	260.160
Flat (2) Portrait	8 1/2" x 11"	0.16" (4mm)	4	250.280
Flat (2) Portrait	11" x 17"	0.16" (4mm)	4	250.284
Flat (2) Landscape	17" x 11"	0.16" (4mm)	4	250.285
Curved	6" x 6"	0.16" (4mm)	4	210.303.Q
Glass Shelf	10" x 24"	-	N/A	TG10-24
Glass Shelf	10" x 36"	-	N/A	TG10-36
Glass Shelf	12" x 12"	-	N/A	TG12-12
Glass Shelf	12" x 24"	-	N/A	TG12-24
Glass Shelf	12" x 36"	-	N/A	TG12-36




Hardware for Standoffs

For Drywall and Concrete

Description	Diameter	Length	Item #
 Phillips flat head screw Coarse Drywall Screw	#6	3/4" (19 mm) 1 1/2" (40 mm)	2206
 Drywall nylon anchor	#6		ANC5
 Drywall zinc anchor	#6		ANC5Z
 Concrete/drywall plastic anchor; drill size 1/4"	#6		ANC1
 Phillips flat head screw Phillips Zinc Screw	#6	1 1/2" (40 mm)	2208 2208Z
 Phillips Stainless Flat Head	#6	2" (50 mm)	2209
 Drywall nylon anchor	#8		ANC6
 Drywall zinc anchor	#8		ANC6Z
 Concrete/drywall plastic anchor; drill size 1/4"	#8		ANC2
Phillips flat head screw	#8	3/4" (20 mm)	2214
Phillips flat head screw Phillips Zinc Screw	#8	1 1/2" (40 mm)	2216 2216Z
Phillips Coarse Drywall	#8	1 1/2" (40 mm)	262156
Phillips flat head screw	#8	2" (50 mm)	2217
Screw and anchor for stronger resistance (select products only)			
 Concrete/drywall plastic anchor; drill size 5/16"	#10		ANC3
 Phillips flat head screw	#10	1 1/4" (32 mm)	2225
Screw and anchor for stronger resistance (select products only)			
 Concrete/drywall plastic anchor; drill size 3/8"	#12		ANC4
 Phillips flat head screw	#12	1 1/4" (32 mm)	2234
 Drywall nylon toggle wings	#8	Pre-Drill 9/16"	TBW9
 Nylon toggle tool key			TBW9K
 Phillips flat head screw	#8	1 1/2" (32 mm)	2216
 Drywall spring toggle wings	#6		TBW6
 Phillips flat head screw	#6	2 1/2" (63 mm)	2200Z
 Drywall spring toggle wings	#8		TBW8
 Phillips flat head screw Phillips Zinc screw	#8	2 1/2" (63 mm)	2300 2300Z
Phillips Stainless Steel Truss Head Screws			
	#6	3/4"	PT6075
	#6	1 1/2"	PT6150
	#6	3/4"	PT8075
	#6	1 1/2"	PT8150

More Lengths
available on
our website!



SET SCREW LOCKS HEAD IN PLACE!



1. Insert anchor into wall
2. Add the screw through the barrel and into the anchor
3. Place washer on top of barrel
4. Align material on top of washer and add top washer
5. Take cap/stud, go through washers, material and screw into barrel

ANCHOR DATASHEET WEIGHT LIMITS AVAILABLE

on our website or
upon request through
our Certified Sales
Representative

Installation Tools for Standoffs

For Drywall and Concrete

**NEW
PRODUCT**

	Description	Item #
	68 piece Tool Set	SETBIT
	Screw Driver for Hex 1/4" Bit with Ergonomic Rubber Handle	61300
	Mini Stubby Handle for Hex 1/4" Bit	61200
	1/4" Magnetic Bit Holder	MBH1/4
	Phillips Head Insert Bit #1 x 3"	PH1-3
	Phillips Head Insert Bit #2 x 2"	PH2-2
	Phillips Head Insert Bit #2 x 3"	PH2-3
	Hex Tamper Proof: 1.5 mm x 3 1/8"	611015
	Hex Tamper Proof: 2 mm x 3 1/8"	611020
	Hex Tamper Proof: 2.5 mm x 3 1/8"	611025
	Hex Tamper Proof: 3 mm x 3 1/8"	611030
	Torx Tamper Proof: T10 BIT x 3 1/8"	101000
	Torx Tamper Proof: T15 BIT x 3 1/8"	101010
	Torx Tamper Proof: T20 BIT x 3 1/8"	101020
	Hex Tamper Proof: 1.5 mm Stubby Handle	611015-K
	Hex Tamper Proof: 2 mm Stubby Handle	611020-K
	Hex Tamper Proof: 2.5 mm Stubby Handle	611025-K
	Hex Tamper Proof: 3 mm Stubby Handle	611030-K
	Hex Tamper Proof: 1.5, 2, 2.5, 3 mm Stubby Handle	STUBBYSET
	2 mm Allen Wrench	ALLENM4
	Standoff Sample Display	DISPLAY-1
	1/4" Cobalt Drill Bit	DB14
	5/32" Cobalt Drill Bit	DB532
	7/32" Cobalt Drill Bit	DB732



Item #: SETBIT



Item #: 61300



Item #: STUBBYSET



Item #: DISPLAY-1


Glass Standoffs




Open Request Product




Set • SKU: SF-50M8

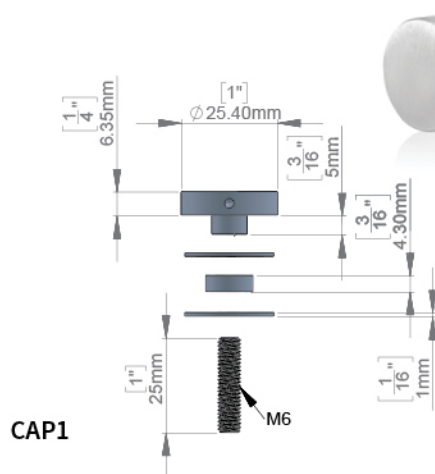

CAP1

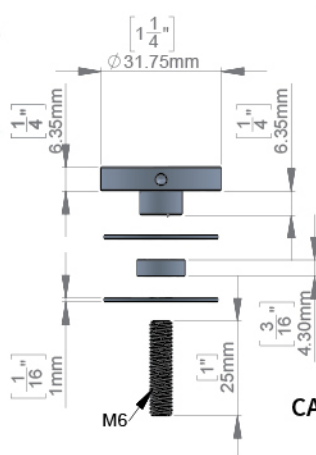

CAP114

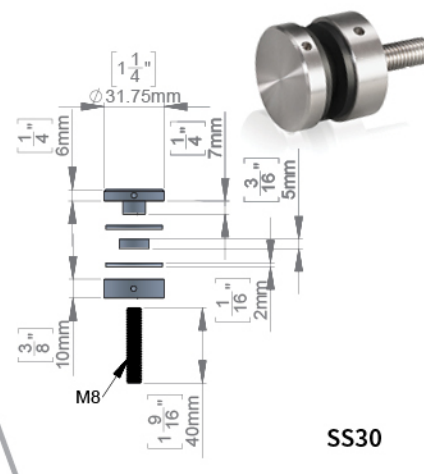

SS30



Description	Mounting	Brushed	Polished
High Grade 316 Stainless Steel, 2" Glass Rail Standoff Fitting with Mounting Plate	For Use with 1/2" and 3/4" (12 and 19 mm) Monolithic Tempered Glass or 9/16" and 27/32" (13.52 and 21.52 mm) Laminated Glass Using DuPont® SentryGlas® Interlayers	RS0B20SS	RS0B20SP
Set of Cap High Grade 316 Stainless Steel, 1" Diameter	5/16"	CAP1BS	CAP1BP*
Set of Cap High Grade 316 Stainless Steel, 1 1/4" Diameter,	5/16"	CAP114BS	CAP114BP*
Set of Cap and barrel High Grade 316 Stainless Steel, 1 3/16" Diameter, Barrel 3/8"	5/16"	SET-150	

*Available upon request minimum order quantity 100

Spigot Clamp

The surface mount spigot clamp is perfect for use with glass wall systems for pools, balconies, stair rails, decks, etc...

- Spigot Clamps are made from 304 or 316 Stainless Steel for corrosion resistance in any environment
- Designed for 3/8" tempered or 1/2" thick laminated glass.
- Does not require any holes to be drilled in the glass
- Two Spigots Clamps can support up to a 4' panel of glass

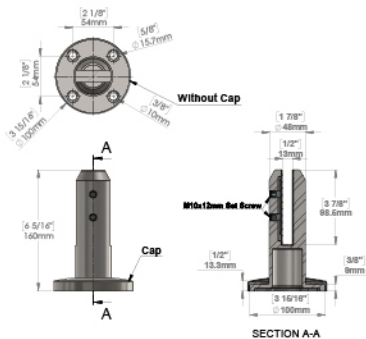A red speech bubble containing the words "NEW" and "PRODUCT" in white, bold, sans-serif capital letters. "NEW" is on the top line and "PRODUCT" is on the bottom line. The speech bubble has a tail pointing towards the bottom left.

Description	Mounting	 Brushed	 Polished	 Matte Black
High Grade 316* stainless steel, square glass spigots are designed for use when the material will be exposed to corrosive elements or exposed to water consistently. Perfect for applications where greater strength is required.	(4) 316 or 306 stainless steel sleeve and a 5/16" diameter anchor	SPIGOT1316SS	SPIGOT1316SP	SPIGOT2316MB
306** stainless steel square glass spigots are designed for use when the material will be exposed to humid areas and has excellent corrosion resistance.		SPIGOT1304SS	SPIGOT1304SP	SPIGOT2304MB


*316 Stainless Steel for use near the sea or pool area

****304 Stainless Steel** is for humid areas
Designed for material 3/8" and 1/2" thickness

Glass Standoffs to Stick with Bit to mark Material

- 3 different diameters
- 3 different heights
- Easy to install with a special design to mark support
- 4 finishes

Diameter	Standoff	Aluminum		Stainless Steel	
					
1/2"	5/16" (7.9 mm)	GS050-050A	GS050-050B	GS050-050S	GS050-050S304
	1" (25.4 mm)	GS050-100A	GS050-100B	GS050-100S	GS050-100S304
	2" (50.8 mm)	GS050-200A	GS050-200B	GS050-200S	GS050-200S304
3/4"	5/16" (7.93 mm)	GS075-050A	GS075-050B	GS075-050S	GS075-050S304
	1" (25.4 mm)	GS075-100A	GS075-100B	GS075-100S	GS075-100S304
	2" (50.8 mm)	GS075-200A	GS075-200B	GS075-200S	GS075-200S304
1"	5/16" (7.9 mm)	GS100-050A	GS100-050B	GS100-050S	GS100-050S304
	1" (25.4 mm)	GS100-100A	GS100-100B	GS100-100S	GS100-100S304
	2" (50.8 mm)	GS100-200A	GS100-200B	GS100-200S	GS100-200S304

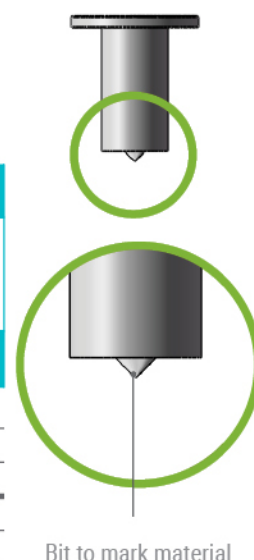

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2

Glue

Glue Glass to Stainless Steel UV640

GUV640

Aluminum Glass Standoffs

Diameter	Standoff	Material Thickness		
			Clear Anodized	Black Anodized
5/8" (15.8 mm)	1/2" (12.7 mm)	0 to 1/16" (1.5 mm)	GCS16-12A	GCS16-12B


INSTALLATION GUIDE

The directions below are general installation recommendations. The weight of each fastener depends on the conditions of use. To avoid unnecessary tension it is advised to avoid over tightening of the body support.



1

Using adhesive place the Head support on the back of the glass or letter.



3

Place template and drill appropriately.



5

Secure the letters into place using Set Screw on the barrel.



2

Place the Glass or letter against the template and use pressure to mark placement of pilot holes.



4

Attach Body ends in correct positions.

LED Sign Clamp

- 5 Different lengths
- 0.4 watts per Sign Clamp
- Transformer included
- For better illumination edges of acrylic must be polished



Size	Standoff	Material Thickness	Length	 White	 Blue	 Red
1"(25 mm)	1"(25 mm)	1/4" to 5/16"	3 1/8" (79.3 mm)	LWR100A-80A	LBR100A-80A	LRR100A-80A
			4 3/4" (120.6 mm)	LWR100A-120A	LBR100A-120A	LRR100A-120A
			7 1/16" (196.8 mm)	LWR100A-180A	LBR100A-180A	LRR100A-180A
			11" (279.4 mm)	LWR100A-280A	LBR100A-280A	LRR100A-280A
			14 15/16" (379.4 mm)	LWR100A-380A	LBR100A-380A	LRR100A-380A

For drywall use: screw 2216 and anchor ANC6, ANC6Z. For concrete use: screw 2216 and anchor ANC2



LED STANDOFFS Also Available. Page 19



Stainless Steel Edge Grip Standoffs









For Indoor Use

No Material
Drilling
Needed!

- Wall mounted edge grip standoffs
- Designed from high quality stainless steel
- Designed for flat material signs
- Non adjustable
- Requires 2 mm (M4) Allen key
- Hardware not included




CONFIGURATION EXAMPLES!

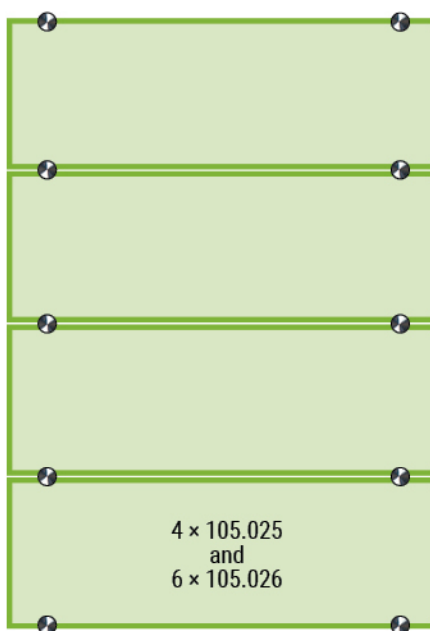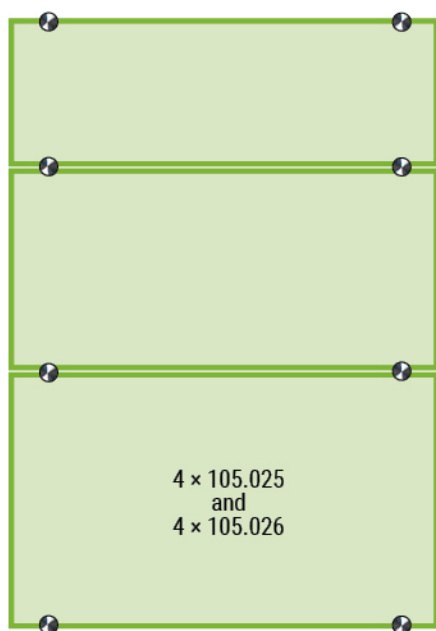

INSTALL OUR EDGE GRIPS QUICK AND EASY

1. Mark on your surface area where you will put your holes.
2. Drill a hole for each marked area (hole size is according to anchor type), and insert your anchors into each hole.
3. Take an Allen key and unlock the edge grip.
4. Remove the edge grip from the base and insert the Phillips flat head screw into the barrel and screw into your anchor.
5. Insert the edge grip back into the base and tighten to the base.
6. Place your material in the slots of the edge grips and tighten the set screw down until it is tight on your material.
7. Wipe off any finger smudges on the standoff.

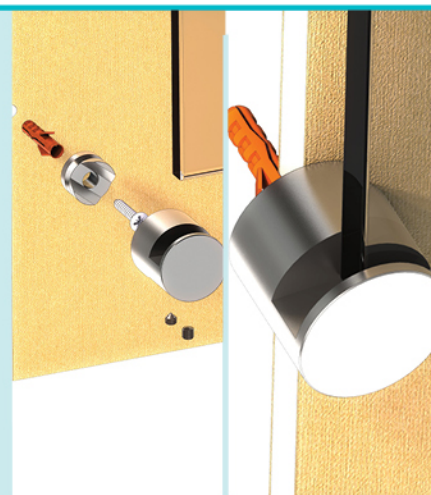

Edge Grip Standoffs


For Indoor/Outdoor Use

Diameter	Standoff	Material Thick.	Type	Aluminum						Stainless Steel
										
				Clear	Shiny	Black	Gold	Bronze	Titanium	Brushed Indoor Use
9/16" (14.2 mm)	9/16" (15 mm)	5/16" (8mm)	Single Channel	105.015A	105.015AS	105.015B	105.015G	105.015AB	105.015T	105.015
1" (25.4 mm)	9/16" (15 mm)	5/16" (8mm)	Single Channel	105.025A	105.025AS	105.025B	105.025G	105.025AB	105.025T	105.025
	9/16" (15 mm)	5/16" (8mm)	Double Channel	105.026A	105.026AS	105.026B	105.026G	105.026AB	105.026T	105.026


Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2


Thickness of material accepted: 2 @ 3/16" or 1 @ 5/16" (2 @ 4 mm or 8 mm)

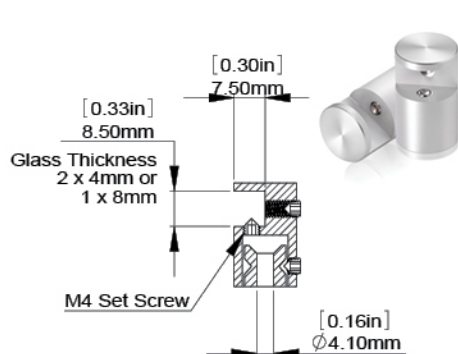

Item #: 105.015

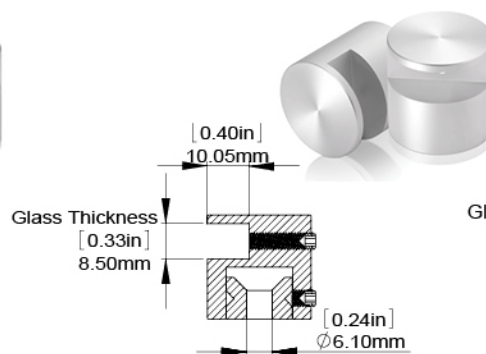

Item #: 105.025

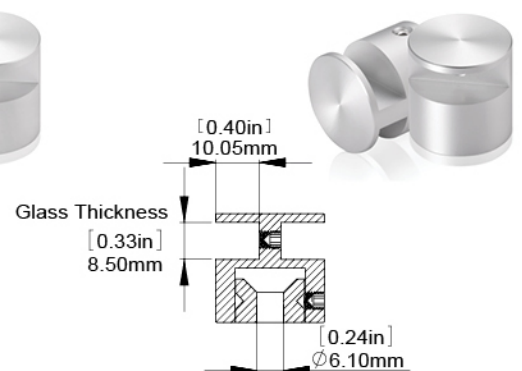

Item #: 105.026



* Glass not included. Images for example only

Adjustable Edge Grip Standoffs

6 Finishes – Stainless Steel for Indoor Use Only, Aluminum for Indoor and Outdoor

- Wall mounted edge grip standoffs
- Designed from high quality materials
- No holes in material required
- Protective washer included
- Set screw to lock in place
- Requires 2 mm (M4) Allen key
- Mounting hardware not included

NEW
Rectangular
Shape
REG050-038A



6 DIFFERENT FINISHES



Aluminum
(A)



Aluminum
Shiny (AS)



Gold Anodized
(G)



Black Anodized
(B)




S.S. Brushed Satin
(S)



S.S. Polished
(P)

INSTALL OUR EDGE GRIPS QUICK AND EASY



1. Mark on your surface area where you will put your holes.
2. Now, drill a hole for each marked area (hole size is according to anchor type), and then insert your anchors into each hole.
3. After you put your anchors in you will want to take an Allen key and unlock the edge grip.
4. Remove the edge grip from the base and insert the Phillips flat head screw into the barrel and screw into your anchor.

5. You will now want to insert the edge grip back into the base and tighten to the base.
6. Lastly, place your material in the slots of the edge grips and tighten the set screw down until it is tight on your material.
7. Once this is complete, wipe off any finger smudges on the standoff and stare in amazement at your completed project.



2 Edge Grips



2 Edge Grips



3 Edge Grips



3 Edge Grips



4 Edge Grips



4 Edge Grips

Adjustable Edge Grip Standoffs

6 Finishes – Stainless Steel for Indoor Use Only, Aluminum for Indoor and Outdoor

Diameter	Standoff	Max Material Thickness	Aluminum				Stainless Steel	
								
1/2" (12.7 mm)	1/2" (12.7 mm)	1/4"	EG050-050A	EG050-050AS	EG050-050G	EG050-050B	EG050-050S	EG050-050P
	3/4" (19.0 mm)	3/8"	EG050-075A	EG050-075AS	EG050-075G	EG050-075B	EG050-075S	EG050-075P
	1" (25.4 mm)		EG050-100A	EG050-100AS	EG050-100G	EG050-100B	EG050-100S	EG050-100P
	1 1/2" (38.0 mm)		EG050-150A	EG050-150AS	EG050-150G	EG050-150B	EG050-150S	EG050-150P
	2" (50.8 mm)		EG050-200A	EG050-200AS	EG050-200G	EG050-200B	EG050-200S	EG050-200P
5/8" (15.8 mm)	1/2" (12.7 mm)	1/4"	EG058-050A	EG058-050AS	EG058-050G	EG058-050B	EG058-050S	EG058-050P
	3/4" (19.0 mm)	3/8"	EG058-075A	EG058-075AS	EG058-075G	EG058-075B	EG058-075S	EG058-075P
	1" (25.4 mm)		EG058-100A	EG058-100AS	EG058-100G	EG058-100B	EG058-100S	EG058-100P
	1 1/2" (38.0 mm)		EG058-150A	EG058-150AS	EG058-150G	EG058-150B	EG058-150S	EG058-150P
	2" (50.8 mm)		EG058-200A	EG058-200AS	EG058-200G	EG058-200B	EG058-200S	EG058-200P
3/4" (19.05 mm)	1/2" (12.7 mm)	1/4"	EG075-050A	EG075-050AS	EG075-050G	EG075-050B	EG075-050S	EG075-050P
	3/4" (19.0 mm)	3/8"	EG075-075A	EG075-075AS	EG075-075G	EG075-075B	EG075-075S	EG075-075P
	1" (25.4 mm)	1/2"	EG075-100A	EG075-100AS	EG075-100G	EG075-100B	EG075-100S	EG075-100P
	1 1/2" (38.0 mm)		EG075-150A	EG075-150AS	EG075-150G	EG075-150B	EG075-150S	EG075-150P
	2" (50.8 mm)		EG075-200A	EG075-200AS	EG075-200G	EG075-200B	EG075-200S	EG075-200P
7/8" (6.3 mm)	1/2" (12.7 mm)	1/4"	EG087-050A	EG087-050AS	EG087-050G	EG087-050B	EG087-050S	EG087-050P
	3/4" (19.0 mm)	3/8"	EG087-075A	EG087-075AS	EG087-075G	EG087-075B	EG087-075S	EG087-075P
	1" (25.4 mm)	1/2"	EG087-100A	EG087-100AS	EG087-100G	EG087-100B	EG087-100S	EG087-100P
	1 1/2" (38.0 mm)		EG087-150A	EG087-150AS	EG087-150G	EG087-150B	EG087-150S	EG087-150P
	2" (50.8 mm)		EG087-200A	EG087-200AS	EG087-200G	EG087-200B	EG087-200S	EG087-200P
1" (25.4 mm)	1/2" (12.7 mm)	1/4"	EG100-050A	EG100-050AS	EG100-050G	EG100-050B	EG100-050S	EG100-050P
	3/4" (19.0 mm)	3/8"	EG100-075A	EG100-075AS	EG100-075G	EG100-075B	EG100-075S	EG100-075P
	1" (25.4 mm)	1/2"	EG100-100A	EG100-100AS	EG100-100G	EG100-100B	EG100-100S	EG100-100P
	1 1/2" (38.0 mm)		EG100-150A	EG100-150AS	EG100-150G	EG100-150B	EG100-150S	EG100-150P
	2" (50.8 mm)		EG100-200A	EG100-200AS	EG100-200G	EG100-200B	EG100-200S	EG100-200P
1 1/4" (31.7 mm)	1/2" (12.7 mm)	1/4"	EG125-050A	EG125-050AS	EG125-050G	EG125-050B	EG125-050S	EG125-050P
	3/4" (19.0 mm)	3/8"	EG125-075A	EG125-075AS	EG125-075G	EG125-075B	EG125-075S	EG125-075P
	1" (25.4 mm)	1/2"	EG125-100A	EG125-100AS	EG125-100G	EG125-100B	EG125-100S	EG125-100P
	1 1/2" (38.0 mm)		EG125-150A	EG125-150AS	EG125-150G	EG125-150B	EG125-150S	EG125-150P
	2" (50.8 mm)		EG125-200A	EG125-200AS	EG125-200G	EG125-200B	EG125-200S	EG125-200P
1 1/2" (38.1 mm)	1/2" (12.7 mm)	1/4"	EG150-050A	EG150-050AS	EG150-050G	EG150-050B	EG150-050S	EG150-050P
	3/4" (19.0 mm)	3/8"	EG150-075A	EG150-075AS	EG150-075G	EG150-075B	EG150-075S	EG150-075P
	1" (25.4 mm)	1/2"	EG150-100A	EG150-100AS	EG150-100G	EG150-100B	EG150-100S	EG150-100P
	1 1/2" (38.0 mm)		EG150-150A	EG150-150AS	EG150-150G	EG150-150B	EG150-150S	EG150-150P
	2" (50.8 mm)		EG150-200A	EG150-200AS	EG150-200G	EG150-200B	EG150-200S	EG150-200P

Rectangular Head (1/2" x 3/4")

1/2" (12.7 mm)	3/8" (9.5 mm)	1/4"	REG050-038A	REG050-038AS	REG050-038G	REG050-038B	REG050-038S	REG050-038P
----------------	---------------	------	-------------	--------------	-------------	-------------	-------------	-------------

REG050-038AB Anodized Bronze & REG050-38T Anodized Titanium also available




Non Adjustable Aluminum Sign Clamp

Aluminum Sign Clamps Are an Easy and Stylish Way to Display Your Most Important Items




Length	Aluminum	
	Chrome-Polished	Satin
3 1/8" (80 mm)	R100-80-CP	R100-80-ST
4 3/4" (120 mm)	R100-120-CP	R100-120-ST
7 1/16" (180 mm)	R100-180-CP	R100-180-ST
11" (280 mm)	R100-280-CP	R100-280-ST
14 5/16" (380 mm)	R100-380-CP	R100-380-ST



2 1/8" (54mm)
3 11/16" (94mm)
6 1/16" (154mm)
10" (254mm)
13 15/16" (354mm)

Material Accepted:
1/8" to 5/16" (3.0mm to 8.0mm)




Thickness of material accepted: 1/8" to 5/16" (3 mm to 8 mm)

Use for drywall: 2 × screw 2216 and anchor 2 × ANC6 or 2 × ANC6Z

Use for concrete: 2 × screw 2216 and 2 × anchor ANC2

5 DIFFERENT SIZES

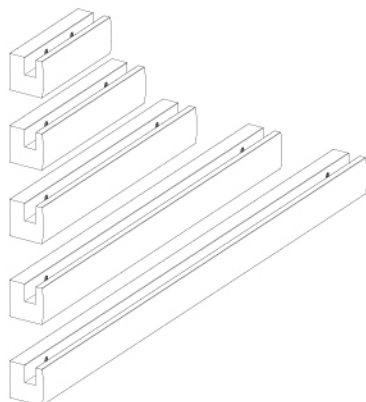



Adjustable Aluminum Sign Clamp

Aluminum Sign Clamps Are an Easy and Stylish Way to Display Your Most Important Items





Length	Aluminum	
	Chrome-Polished	Satin
3 1/8" (80 mm)	R100A-80-CP	R100A-80-ST
4 3/4" (120 mm)	R100A-120-CP	R100A-120-ST
7 1/16" (180 mm)	R100A-180-CP	R100A-180-ST
11" (280 mm)	R100A-280-CP	R100A-280-ST
14 5/16" (380 mm)	R100A-380-CP	R100A-380-ST



Thickness of material accepted: 1/16" to 3/8" (1.5 mm to 10 mm)

Use for drywall: 2 × screw 2216 and anchor 2 × ANC6 or 2 × ANCZ

Use for concrete: 2 × screw 2216 and 2 × anchor ANC2

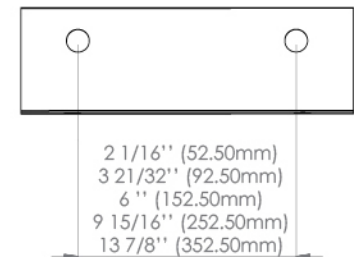

5 DIFFERENT SIZES

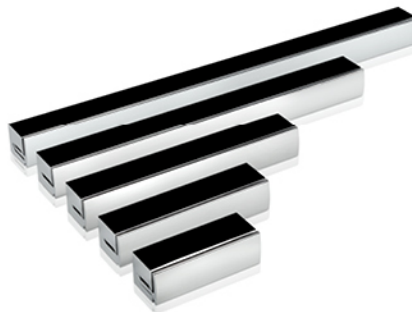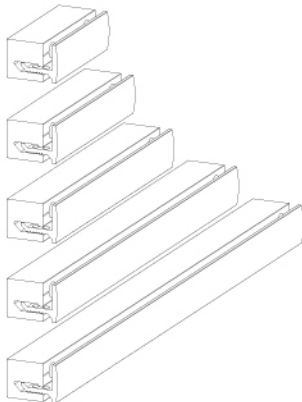

Edge Grip with 8.5" × 11" Acrylic

- Wall mounted edge grip standoffs
- Non adjustable
- Easy access to set screw to lock into place
- Hardware included
- Sold with or without acrylic



Description	Thickness material Accepted		
Kit of 4 wall mounted edge grip		Clear Anodized ASA1922A	Black Anodized ASA1922B
Kit of 4 wall mounted edge grip, Anodized Aluminum with Acrylic 9.69" × 11.12", For insert 8.5" × 11"	3/16"	ASA1922A-K	ASA1922B-K





CUSTOMIZABLE STANDOFFS



Caps

p.38



Multi-Mount
Hardware

p.41



Barrels

p.42



Washers

p.46



Aluminum Square
Caps and Barrels

p.49



Aluminum Hubs

p.52



Hardware
for Customizable
Standoffs

p.56



Tools
for Customizable
Standoffs

p.59

Caps

17 Finishes – 15 Outdoor / 2 Indoor Use



- Wall mounted standoffs
- Designed from high quality materials
- Stainless steel and aluminum for indoor and outdoor use
- 17 different finishes
- 3 different caps



Rounded Cap
CAP075025RSS

17 DIFFERENT FINISHES





*Available upon request minimum order quantity 100



Caps

17 Finishes, Indoor / Outdoor Use


**Ideal For
Multi-Mount
Projects!**

Diameter	Cap Height	Type	Tapped							
										
1/4" (6.35 mm)	5/32" (4 mm)	Standard	6-32	CAP025A	CAP025AS*	CAP025B	CAP025AB	CAP025G	CAP025BR*	CAP025BL*
3/8" (9.52 mm)	1/4" (6.35 mm) 1/4" (6.35mm)	Standard Locking	10-24 10-24	CAP038A CAP038LA	CAP038AS*	CAP038B CAP038LB	CAP038AB	CAP038G	CAP038BR*	CAP038BL*
1/2" (12.7 mm)	1/4" (6.35 mm) 1/4" (6.35 mm)	Standard Locking	10-24 10-24	CAP050A CAP050LA*	CAP050AS*	CAP050B CAP050LB*	CAP050AB CAP050LAB*	CAP050G CAP050LG*	CAP050BR* CAP050LBR*	CAP050BL* CAP050LBL*
5/8" (15.87 mm)	1/4" (6.35 mm)	Standard	1/4-20	CAP058025A	CAP058025AS*	CAP058025B	CAP058025AB*	CAP058025G	CAP058025BR*	CAP058025BL*
	5/16" (6.35 mm)	Standard	5/16-18	CAP058A	CAP058AS*	CAP058B	CAP058AB*	CAP058G	CAP058BR*	CAP058BL*
	1/4" (6.35 mm)	Locking	1/4-20	CAP058025LA	CAP058025LAS*	CAP058025LB	CAP058025LAB*	CAP058025LG	CAP058025LBR*	CAP058025LBL*
	5/16" (6.35 mm)	Locking	5/16-18	CAP058LA	CAP058LAS*	CAP058LB	CAP058LAB*	CAP058LG	CAP058LBR*	CAP058LBL*
3/4" (19.05 mm)	1/4" (6.35 mm)	Standard	1/4-20	CAP075025A	CAP075025AS*	CAP075025B	CAP075025AB*	CAP075025G	CAP075025BR*	CAP075025BL*
	3/8" (9.52 mm)	Standard	5/16-18	CAP075A	CAP075AS*	CAP075B	CAP075AB*	CAP075G	CAP075BR*	CAP075BL*
	1/4" (6.35 mm)	Locking	1/4-20	CAP075025LA	CAP075025LAS*	CAP075025LB	CAP075025LAB*	CAP075025LG	CAP075025LBR*	CAP075025LBL*
	3/8" (9.52 mm)	Locking	5/16-18	CAP075LA	CAP075LAS*	CAP075LB	CAP075LAB*	CAP075LG	CAP075LBR*	CAP075LBL*
7/8" (22.22 mm)	1/4" (6.35 mm)	Standard	1/4-20	CAP078025A	CAP078025AS*	CAP078025B	CAP078025AB*	CAP078025G	CAP078025BR*	CAP078025BL*
	1/4" (6.35 mm)	Locking	1/4-20	CAP078025LA	CAP078025LAS*	CAP078025LB	CAP078025LAB*	CAP078025LG	CAP078025LBR*	CAP078025LBL*
1" (25.4 mm)	1/4" (6.35 mm)	Standard	1/4-20	CAP100025A	CAP100025AS*	CAP100025B	CAP100025AB*	CAP100025G	CAP100025BR*	CAP100025BL*
	3/8" (9.52 mm)	Standard	5/16-18	CAP100A	CAP100AS*	CAP100B	CAP100AB*	CAP100G	CAP100BR*	CAP100BL*
	1/4" (6.35 mm)	Locking	1/4-20	CAP100025LA	CAP100025LAS*	CAP100025LB	CAP100025LAB*	CAP100025LG	CAP100025LBR*	CAP100025LBL*
	5/16" (8.0 mm)	Locking	5/16-18	CAP100LA	CAP100LAS*	CAP100LB	CAP100LAB*	CAP100LG	CAP100LBR*	CAP100LBL*
	1/8" (3.2 mm)	Rounded	5/16-18	CAP100RA	CAP100RAS*	CAP100RB	CAP100RAB*	CAP100RG	CAP100RBR*	CAP100RBL*
1 1/4" (31.75 mm)	1/2" (12.7 mm)	Standard	5/16-18	CAP125A	CAP125AS*	CAP125B	CAP125AB*	CAP125G	CAP125BR*	CAP125BL*
	5/16" (8 mm)	Locking	5/16-18	CAP125LA	CAP125LAS*	CAP125LB	CAP125LAB*	CAP125LG	CAP125LBR*	CAP125LBL*
	1/8" (3.2 mm)	Rounded	5/16-18	CAP125RA	CAP125RAS*	CAP125RB	CAP125RAB*	CAP125RG	CAP125RBR*	CAP125RBL*
1 1/2" (38.10 mm)	1/2" (12.7 mm)	Standard	5/16-18	CAP150A	CAP150AS*	CAP150B	CAP150AB*	CAP150G	CAP150BR*	CAP150BL*
	5/16" (8 mm)	Locking	5/16-18	CAP150LA	CAP150LAS*	CAP150LB	CAP150LAB*	CAP150LG	CAP150LBR*	CAP150LBL*
	1/8" (3.2 mm)	Rounded	5/16-18	CAP150RA	CAP150RAS*	CAP150RB	CAP150RAB*	CAP150RG	CAP150RBR*	CAP150RBL*
2" (50.80 mm)	1/2" (12.7 mm)	Standard	5/16-18	CAP200A	CAP200AS*	CAP200B	CAP200AB*	CAP200G	CAP200BR*	CAP200BL*
	1/2" (12.7 mm)	Locking	5/16-18	CAP200LA	CAP200LAS*	CAP200LB	CAP200LAB*	CAP200LG	CAP200LBR*	CAP200LBL*

*Available upon request minimum order quantity 100



AMERICA'S # 1 CHOICE FOR STANDOFFS

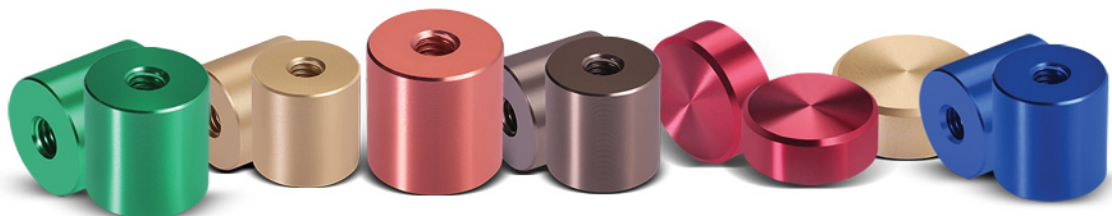

Aluminum								Stainless Steel 304	
									
Copper	Green	Dark Green	Titanium	Pink	Purple	Red	Tan	Brushed	Polished
CAP025CP'	CAP025GN'	CAP025DGN'	CAP025T'	CAP025P'	CAP025PL'	CAP025RD'	CAP025TAN'	CAP025SS	CAP025SP
CAP038CP'	CAP038GN'	CAP038DGN'	CAP038T'	CAP038P'	CAP038PL'	CAP038RD'	CAP038TAN'	CAP038SS	CAP038SP
CAP050CP'	CAP050GN'	CAP050DGN'	CAP050T'	CAP050P'	CAP050PL'	CAP050RD'	CAP050TAN'	CAP050SS	CAP050SP
CAP050LCP'	CAP050LGN'	CAP050LDGN'	CAP050LT'	CAP050LP'	CAP050LPL'	CAP050LRD'	CAP050LTAN'	CAP050LSS	CAP050LSP'
CAP058025CP'	CAP058025GN'	CAP058025DGN'	CAP058025T'	CAP058025P'	CAP058025PL'	CAP058025RD'	CAP058025TAN'	CAP058025SS	CAP058025SP
CAP058CP'	CAP058GN'	CAP058DGN'	CAP058T'	CAP058P'	CAP058PL'	CAP058RD'	CAP058TAN'	CAP058SS	CAP058SP
CAP058025LCP'	CAP058025LGRE'	CAP058025LDGN'	CAP058025LT'	CAP058025LP'	CAP058025LPL'	CAP058025LRD'	CAP058025LTAN'	CAP058025LSS	CAP058025LSP
CAP058LCP'	CAP058LGRE'	CAP058LDGN'	CAP058LT'	CAP058LP'	CAP058LPL'	CAP058LRD'	CAP058LTAN'	CAP058LSS	CAP058LSP
CAP075025CP'	CAP075025GN'	CAP075025DDGN'	CAP075025T'	CAP075025P'	CAP075025PL'	CAP075025RD'	CAP075025TAN'	CAP075025SS	CAP075025SP
CAP075CP'	CAP075GN'	CAP075DGN'	CAP075T'	CAP075P'	CAP075PL'	CAP075RD'	CAP075TAN'	CAP075SS	CAP075SP
CAP075025LCP'	CAP075025LGN'	CAP075025LDGN'	CAP075025LT'	CAP075025LP'	CAP075025LPL'	CAP075025LRD'	CAP075025LTAN'	CAP075025LSS	CAP075025LSP
CAP075LCP'	CAP075LGN'	CAP075LDGN'	CAP075LT'	CAP075LP'	CAP075LPL'	CAP075LRD'	CAP075LTAN'	CAP075LSS	CAP075LSP
CAP078025CP'	CAP078025GN'	CAP078025DGN'	CAP078025T'	CAP078025P'	CAP078025PL'	CAP078025RD'	CAP078025TAN'	CAP078025SS	CAP078025SP
CAP078025LCP'	CAP078025LGN'	CAP078025LDGN'	CAP078025LT'	CAP078025LP'	CAP078025LPL'	CAP078025LRD'	CAP078025LTAN'	CAP078025LSS	CAP078025LSP
CAP100025CP'	CAP100025GN'	CAP100025DGN'	CAP100025T'	CAP100025LP'	CAP100025LPL'	CAP100025LRD'	CAP100025LTAN'	CAP100025SS	CAP100025SP
CAP100CP'	CAP100GN'	CAP100DGN'	CAP100T'	CAP100LP'	CAP100LPL'	CAP100LRD'	CAP100LTAN'	CAP100SS	CAP100SP
CAP100025LCP'	CAP100025LGN'	CAP100025LDGN'	CAP100025LT'	CAP100RP'	CAP100RPL'	CAP100RRD'	CAP100RTAN'	CAP100025LSS	CAP100025LSP
CAP100LCP'	CAP100LGN'	CAP100LDGN'	CAP100LT'	CAP100025P'	CAP100025PL'	CAP100025RD'	CAP100025TAN'	CAP100LSS	CAP100LSP
CAP100RCP'	CAP100RGN'	CAP100RDGN'	CAP100RT'	CAP100P'	CAP100PL'	CAP100RD'	CAP100TAN'	CAP100RSS	CAP100RSP
CAP125CP'	CAP125GN'	CAP125DGN'	CAP125T'	CAP125P'	CAP125PL'	CAP125RD'	CAP125TAN'	CAP125SS	CAP125SP
CAP125LCP'	CAP125LGN'	CAP125LDGN'	CAP125LT'	CAP125LP'	CAP125LPL'	CAP125LRD'	CAP125LTAN'	CAP125LSS	CAP125LSP
CAP125RCP'	CAP125RGN'	CAP125RDGN'	CAP125RT'	CAP125RP'	CAP125RPL'	CAP125RRD'	CAP125RTAN'	CAP125RSS	CAP125RSP
CAP150CP'	CAP150GN'	CAP150DGN'	CAP150T'	CAP150P'	CAP150PL'	CAP150RD'	CAP150TAN'	CAP150SS	CAP150SP
CAP150LCP'	CAP150LGN'	CAP150LDGN'	CAP150LT'	CAP150LP'	CAP150LPL'	CAP150LRD'	CAP150LTAN'	CAP150LSS	CAP150LSP
CAP150RCP'	CAP150RGN'	CAP150RDGN'	CAP150RT'	CAP150RP'	CAP150RPL'	CAP150RRD'	CAP150RTAN'	CAP150RSS	CAP150RSP
CAP200CP'	CAP200GN'	CAP200DGN'	CAP200T'	CAP200P'	CAP200PL'	CAP200RD'	CAP200TAN'	CAP200SS	CAP200SP
CAP200LCP'	CAP200LGN'	CAP200LDGN'	CAP200LT'	CAP200LP'	CAP200LPL'	CAP200LRD'	CAP200LTAN'	CAP200LSS	CAP200LSP'

Caps

17 Finishes, Indoor / Outdoor Use

IDEAL FOR MULTI-MOUNT PROJECTS!

• 3 Different Shapes



Standard
Regular cap



Locking
As regular but
with hole to
use tightening
tool




Rounded
Smooth shape
to get small
Relief

- 2 Materials: stainless steel and aluminum
- 17 Finishes: 15 for aluminum and 2 for stainless steel
- 8 Diameters: from 1/4" to 2"
- 4 Threads: 6-32, 10-24, 1/4-20 & 5/16-18
- Other open requests

CUSTOMIZE YOUR VERY OWN STANDOFF!

Mix and match between: Finish, Color, and Sizes

- Choose your cap (page: 43)
- Determine stud length (pages: 47, 49)
- Choose your barrel (pages: 47, 49)
- Add your washers (page: 48)
- Don't forget your combination screws and anchors (pages 50-51)

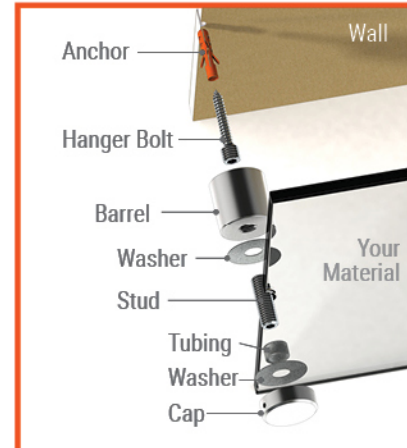


1. Insert anchor in wall
2. Add the combination screw to anchor
3. Screw barrel onto combination screw
4. Screw stud in barrel and add one washer
5. Place your material on the stud and add another washer
6. Screw cap onto stud
7. Take cap/stud, go through washers, material and screw into barrel







Multi-Mount Hardware

17 Different Sizes

• Single Mount

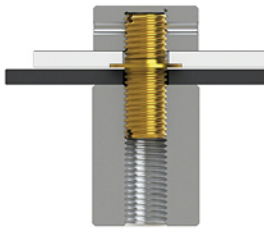

• Multi-Mount

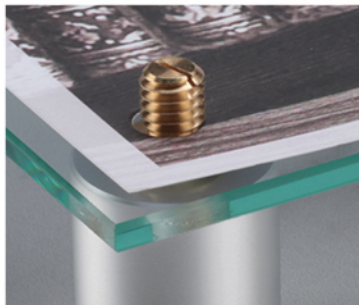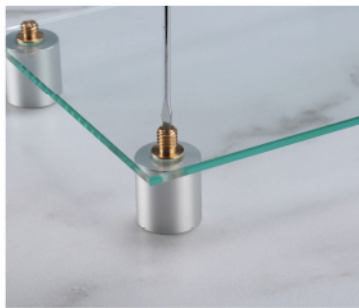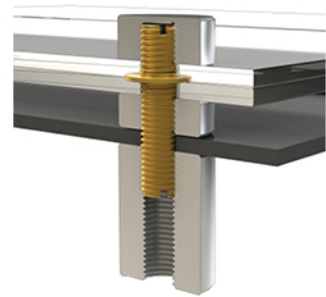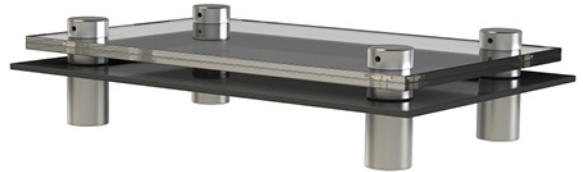


Multi-Mount Hardware

17 Different Sizes


- Easily change out sign designs
- Use with our customizable line
- Pick the correct barrel
- Pick the correct hardware for the first layer
- Pick the correct hardware for the second layer

With our Multi-Mount Hardware, you can make any multi mount signage system. The multi mount hardware is a very easy and versatile product to use. This product allows you to utilize our popular customizable line to facilitate the multi-layer applications. Thanks to its two-sided threaded design you are able to easily do multi-layer applications and easily change out graphics or materials and not have to remove the whole system. Install your preferred barrel, sandwich your material to the barrel with the multi mount hardware, slide the extra piece of material on to protruding threads and install your cap. With this application you will be able to easily change out sign designs in just a few short seconds. Use with our customizable line by picking any correct barrel, then pick the correct hardware to hang your first layer of material and second layer of material.

• 1/4-20 Thread

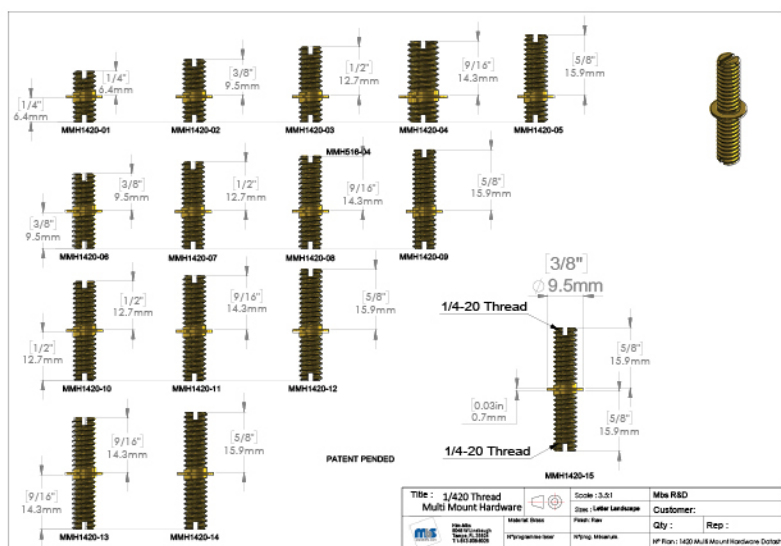


• 5/16-18 Thread

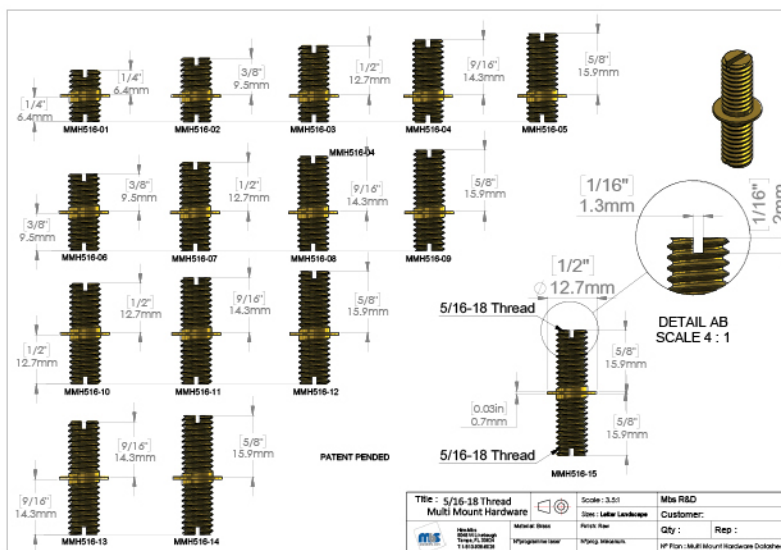

Barrels

17 Finishes, Indoor / Outdoor Use

Find diameter 1/4" to 3/4" in fold out →

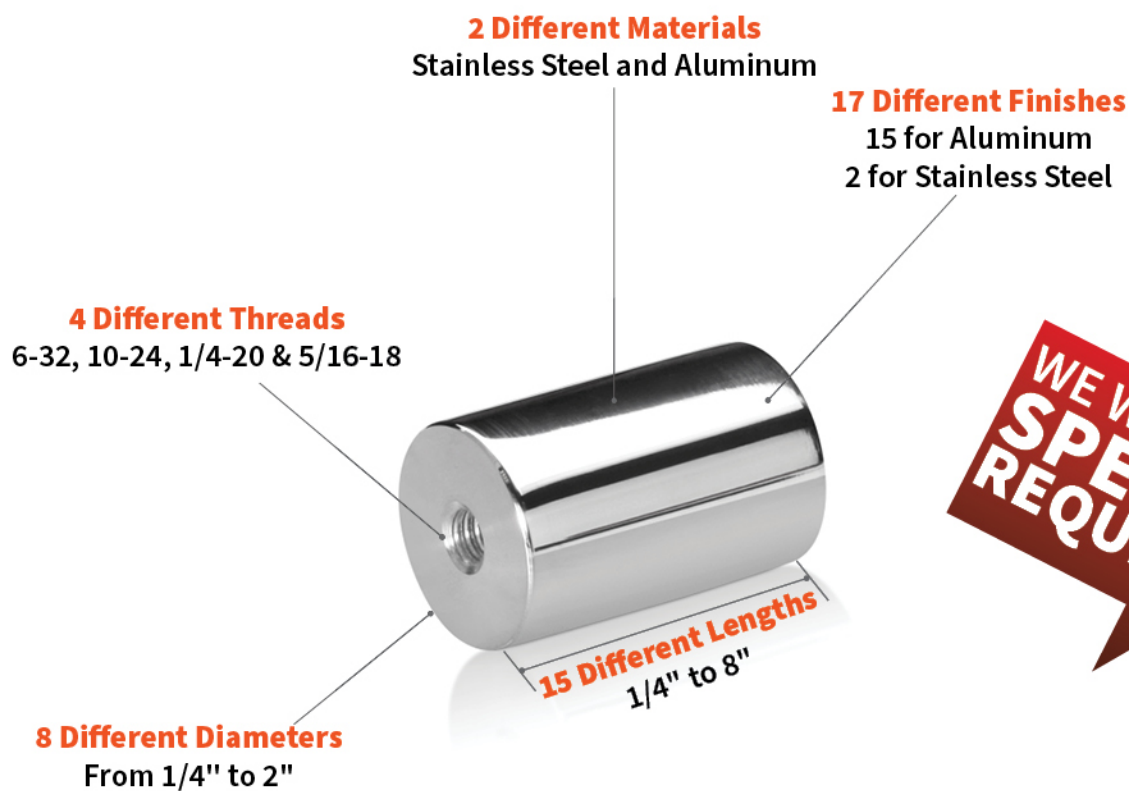

Barrels

1/4" to 3/4" Diameter Barrels.


For 7/8" to 2" diameter barrels go to foldout on page 45 on the next spread.

17 Finishes – 15 Outdoor / 2 Indoor Use

Diameter	Barrel Height	Tapped	Tapped Length							
				Dull	Shiny	Black	Gold	Bronze	Antique Brass	Blue
1/4" (6.35 mm)	1/4"	6-32	Thru	S025-025A	S025-025AS	S025-025B	S025-025G	S025-025AB	S025-025BRA	S025-025BLE
	1/2"	6-32	Thru	S025-050A	S025-050AS	S025-050B	S025-050G	S025-050AB	S025-050BRA	S025-050BLE
	3/4"	6-32	Thru	S025-075A	S025-075AS	S025-075B	S025-075G	S025-075AB	S025-075BRA	S025-075BLE
	1"	6-32	Thru	S025-100A	S025-100AS	S025-100B	S025-100G	S025-100AB	S025-100BRA	S025-100BLE
3/8" (9.52 mm)	1/4"	10-24	Thru	S038-025A	S038-025AS	S038-025B	S038-025G	S038-025AB	S038-025BRA	S038-025BLE
	1/2"	10-24	Thru	S038-050A	S038-050AS	S038-050B	S038-050G	S038-050AB	S038-050BRA	S038-050BLE
	3/4"	10-24	Thru	S038-075A	S038-075AS	S038-075B	S038-075G	S038-075AB	S038-075BRA	S038-075BLE
	1"	10-24	Thru	S038-100A	S038-100AS	S038-100B	S038-100G	S038-100AB	S038-100BRA	S038-100BLE
1/2" (12.7 mm)	1/2"	10-24	Thru	S050-050A	S050-050AS	S050-050B	S050-050G	S050-050AB	S050-050BRA	S050-050BLE
	3/4"	10-24	Thru	S050-075A	S050-075AS	S050-075B	S050-075G	S050-075AB	S050-075BRA	S050-075BLE
	1"	10-24	Thru	S050-100A	S050-100AS	S050-100B	S050-100G	S050-100AB	S050-100BRA	S050-100BLE
	1 1/2"	10-24	Thru	S050-150A	S050-150AS	S050-150B	S050-150G	S050-150AB	S050-150BRA	S050-150BLE
	2"	10-24	Thru	S050-200A	S050-200AS	S050-200B	S050-200G	S050-200AB	S050-200BRA	S050-200BLE
	5"	10-24	1" Both Ends	S050-500A	S050-500AS	S050-500B	S050-500G	S050-500AB	S050-500BRA	S050-500BLE
	7"	10-24	1" Both Ends	S050-700A	S050-700AS	S050-700B	S050-700G	S050-700AB	S050-700BRA	S050-700BLE
5/8" (15.87 mm)	1/4"	1/4-20	Thru	S058-02525A	S058-02525AS	S058-02525B	S058-02525G	S058-02525AB	S058-02525BRA	S058-02525BLE
	1/4"	5/16-18	Thru	S058-025A	S058-025AS	S058-025B	S058-025G	S058-025AB	S058-025BRA	S058-025BLE
	1/2"	1/4-20	Thru	S058-05025A	S058-05025AS	S058-05025B	S058-05025G	S058-05025AB	S058-05025BRA	S058-05025BLE
	1/2"	5/16-18	Thru	S058-050A	S058-050AS	S058-050B	S058-050G	S058-050AB	S058-050BRA	S058-050BLE
	3/4"	1/4-20	Thru	S058-07525A	S058-07525AS	S058-07525B	S058-07525G	S058-07525AB	S058-07525BRA	S058-07525BLE
	3/4"	5/16-18	Thru	S058-075A	S058-075AS	S058-075B	S058-075G	S058-075AB	S058-075BRA	S058-075BLE
	1"	1/4-20	Thru	S058-10025A	S058-10025AS	S058-10025B	S058-10025G	S058-10025AB	S058-10025BRA	S058-10025BLE
	1"	5/16-18	Thru	S058-100A	S058-100AS	S058-100B	S058-100G	S058-100AB	S058-100BRA	S058-100BLE
	1 1/2"	1/4-20	Thru	S058-15025A	S058-15025AS	S058-15025B	S058-15025G	S058-15025AB	S058-15025BRA	S058-15025BLE
	1 1/2"	5/16-18	Thru	S058-150A	S058-150AS	S058-150B	S058-150G	S058-150AB	S058-150BRA	S058-150BLE
	2"	1/4-20	1" Both Ends	S058-20025A	S058-20025AS	S058-20025B	S058-20025G	S058-20025AB	S058-20025BRA	S058-20025BLE
	2"	5/16-18	1" Both Ends	S058-200A	S058-200AS	S058-200B	S058-200G	S058-200AB	S058-200BRA	S058-200BLE
	3"	1/4-20	1" Both Ends	S058-30025A	S058-30025AS	S058-30025B	S058-30025G	S058-30025AB	S058-30025BRA	S058-30025BLE
	3"	5/16-18	1" Both Ends	S058-300A	S058-300AS	S058-300B	S058-300G	S058-300AB	S058-300BRA	S058-300BLE
3/4" (19.05 mm)	1/2"	1/4-20	Thru	S075-05025A	S075-05025AS	S075-05025B	S075-05025G	S075-05025AB	S075-05025BRA	S075-05025BLE
	1/2"	5/16-18	Thru	S075-050A	S075-050AS	S075-050B	S075-050G	S075-050AB	S075-050BRA	S075-050BLE
	3/4"	5/16-18	Thru	S075-075A	S075-075AS	S075-075B	S075-075G	S075-075AB	S075-075BRA	S075-075BLE
	1"	1/4-20	Thru	S075-10025A	S075-10025AS	S075-10025B	S075-10025G	S075-10025AB	S075-10025BRA	S075-10025BLE
	1"	5/16-18	Thru	S075-100A	S075-100AS	S075-100B	S075-100G	S075-100AB	S075-100BRA	S075-100BLE
	1 1/2"	1/4-20	Thru	S075-15025A	S075-15025AS	S075-15025B	S075-15025G	S075-15025AB	S075-15025BRA	S075-15025BLE
	1 1/2"	5/16-18	Thru	S075-150A	S075-150AS	S075-150B	S075-150G	S075-150AB	S075-150BRA	S075-150BLE
	2"	1/4-20	Thru	S075-20025A	S075-20025AS	S075-20025B	S075-20025G	S075-20025AB	S075-20025BRA	S075-20025BLE
	2"	5/16-18	Thru	S075-200A	S075-200AS	S075-200B	S075-200G	S075-200AB	S075-200BRA	S075-200BLE
	2 1/2"	5/16-18	1" Both Ends	S075-250A	S075-250AS	S075-250B	S075-250G	S075-250AB	S075-250BRA	S075-250BLE
	2 3/4"	5/16-18	1" Both Ends	S075-275A	S075-275AS	S075-275B	S075-275G	S075-275AB	S075-275BRA	S075-275BLE
	3"	1/4-20	1" Both Ends	S075-30025A	S075-30025AS	S075-30025B	S075-30025G	S075-30025AB	S075-30025BRA	S075-30025BLE
	3"	5/16-18	1" Both Ends	S075-300A	S075-300AS	S075-300B	S075-300G	S075-300AB	S075-300BRA	S075-300BLE
	3 1/4"	5/16-18	1" Both Ends	S075-325A	S075-325AS	S075-325B	S075-325G	S075-325AB	S075-325BRA	S075-325BLE
	4"	5/16-18	1" Both Ends	S075-400A	S075-400AS	S075-400B	S075-400G	S075-400AB	S075-400BRA	S075-400BLE



deal For Multi-Mount Projects!

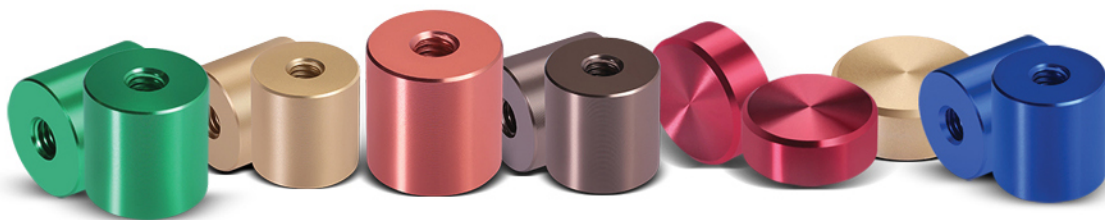

Aluminum								Stainless Steel	
									
Copper	Green	Dark Green	Graphite	Pink	Purple	Red	Tan	Brushed	Polished
S025-025COP'	S025-025GRE'	S025-025DGRE'	S025-025GRA'	S025-025PIN'	S025-025PUR'	S025-025RED'	S025-025TAN'	S025-025SS	S025-025SP
S025-050COP'	S025-050GRE'	S025-050DGRE'	S025-050GRA'	S025-050PIN'	S025-050PUR'	S025-050RED'	S025-050TAN'	S025-050SS	S025-050SP
S025-075COP'	S025-075GRE'	S025-075DGRE'	S025-075GRA'	S025-075PIN'	S025-075PUR'	S025-075RED'	S025-075TAN'	S025-075SS	S025-075SP'
S025-100COP'	S025-100GRE'	S025-100DGRE'	S025-100GRA'	S025-100PIN'	S025-100PUR'	S025-100RED'	S025-100TAN'	S025-100SS	S025-100SP'
S038-025COP'	S038-025GRE'	S038-025DGRE'	S038-025GRA'	S038-025PIN'	S038-025PUR'	S038-025RED'	S038-025TAN'	S038-025SS'	S038-025SP'
S038-050COP'	S038-050GRE'	S038-050DGRE'	S038-050GRA'	S038-050PIN'	S038-050PUR'	S038-050RED'	S038-050TAN'	S038-050SS	S038-050SP
S038-075COP'	S038-075GRE'	S038-075DGRE'	S038-075GRA'	S038-075PIN'	S038-075PUR'	S038-075RED'	S038-075TAN'	S038-075SS	S038-075SP
S038-100COP'	S038-100GRE'	S038-100DGRE'	S038-100GRA'	S038-100PIN'	S038-100PUR'	S038-100RED'	S038-100TAN'	S038-100SS	S038-100SP
S050-050COP'	S050-050GRE'	S050-050DGRE'	S050-050GRA'	S050-050PIN'	S050-050PUR'	S050-050RED'	S050-050TAN'	S050-050SS	S050-050SP
S050-075COP'	S050-075GRE'	S050-075DGRE'	S050-075GRA'	S050-075PIN'	S050-075PUR'	S050-075RED'	S050-075TAN'	S050-075SS	S050-075SP'
S050-100COP'	S050-100GRE'	S050-100DGRE'	S050-100GRA'	S050-100PIN'	S050-100PUR'	S050-100RED'	S050-100TAN'	S050-100SS	S050-100SP'
S050-150COP'	S050-150GRE'	S050-150DGRE'	S050-150GRA'	S050-150PIN'	S050-150PUR'	S050-150RED'	S050-150TAN'	S050-150SS	S050-150SP'
S050-200COP'	S050-200GRE'	S050-200DGRE'	S050-200GRA'	S050-200PIN'	S050-200PUR'	S050-200RED'	S050-200TAN'	S050-200SS	S050-200SP'
S050-500COP'	S050-500GRE'	S050-500DGRE'	S050-500GRA'	S050-500PIN'	S050-500PUR'	S050-500RED'	S050-500TAN'	S050-500SS'	S050-500SP'
S050-700COP'	S050-700GRE'	S050-700DGRE'	S050-700GRA'	S050-700PIN'	S050-700PUR'	S050-700RED'	S050-700TAN'	S050-700SS'	S050-700SP'
S058-02525COP'	S058-02525GRE'	S058-02525DGRE'	S058-02525GRA'	S058-02525PIN'	S058-02525PUR'	S058-02525RED'	S058-02525TAN'	S058-02525SS	S058-02525SP
S058-025COP'	S058-025GRE'	S058-025DGRE'	S058-025GRA'	S058-025PIN'	S058-025PUR'	S058-025RED'	S058-025TAN'	S058-025SS	S058-025SP
S058-05025COP'	S058-05025GRE'	S058-05025DGRE'	S058-05025GRA'	S058-05025PIN'	S058-05025PUR'	S058-05025RED'	S058-05025TAN'	S058-05025SS	S058-05025SP
S058-050COP'	S058-050GRE'	S058-050DGRE'	S058-050GRA'	S058-050PIN'	S058-050PUR'	S058-050RED'	S058-050TAN'	S058-050SS	S058-050SP
S058-07525COP'	S058-07525GRE'	S058-07525DGRE'	S058-07525GRA'	S058-07525PIN'	S058-07525PUR'	S058-07525RED'	S058-07525TAN'	S058-07525SS	S058-07525SP
S058-075COP'	S058-075GRE'	S058-075DGRE'	S058-075GRA'	S058-075PIN'	S058-075PUR'	S058-075RED'	S058-075TAN'	S058-075SS	S058-075SP
S058-10025COP'	S058-10025GRE'	S058-10025DGRE'	S058-10025GRA'	S058-10025PIN'	S058-10025PUR'	S058-10025RED'	S058-10025TAN'	S058-10025SS	S058-10025SP
S058-100COP'	S058-100GRE'	S058-100DGRE'	S058-100GRA'	S058-100PIN'	S058-100PUR'	S058-100RED'	S058-100TAN'	S058-100SS	S058-100SP
S058-15025COP'	S058-15025GRE'	S058-15025DGRE'	S058-15025GRA'	S058-15025PIN'	S058-15025PUR'	S058-15025RED'	S058-15025TAN'	S058-15025SS	S058-15025SP
S058-150COP'	S058-150GRE'	S058-150DGRE'	S058-150GRA'	S058-150PIN'	S058-150PUR'	S058-150RED'	S058-150TAN'	S058-150SS	S058-150SP
S058-20025COP'	S058-20025GRE'	S058-20025DGRE'	S058-20025GRA'	S058-20025PIN'	S058-20025PUR'	S058-20025RED'	S058-20025TAN'	S058-20025SS	S058-20025SP
S058-200COP'	S058-200GRE'	S058-200DGRE'	S058-200GRA'	S058-200PIN'	S058-200PUR'	S058-200RED'	S058-200TAN'	S058-200SS	S058-200SP
S058-30025COP'	S058-30025GRE'	S058-30025DGRE'	S058-30025GRA'	S058-30025PIN'	S058-30025PUR'	S058-30025RED'	S058-30025TAN'	S058-30025SS	S058-30025SP
S058-300COP'	S058-300GRE'	S058-300DGRE'	S058-300GRA'	S058-300PIN'	S058-300PUR'	S058-300RED'	S058-300TAN'	S058-300SS	S058-300SP
S075-05025COP'	S075-05025GRE'	S075-05025DGRE'	S075-05025GRA'	S075-05025PIN'	S075-05025PUR'	S075-05025RED'	S075-05025TAN'	S075-05025SS	S075-05025SP
S075-050COP'	S075-050GRE'	S075-050DGRE'	S075-050GRA'	S075-050PIN'	S075-050PUR'	S075-050RED'	S075-050TAN'	S075-050SS	S075-050SP
S075-075COP'	S075-075GRE'	S075-075DGRE'	S075-075GRA'	S075-075PIN'	S075-075PUR'	S075-075RED'	S075-075TAN'	S075-075SS	S075-075SP
S075-10025COP'	S075-10025GRE'	S075-10025DGRE'	S075-10025GRA'	S075-10025PIN'	S075-10025PUR'	S075-10025RED'	S075-10025TAN'	S075-10025SS	S075-10025SP
S075-100COP'	S075-100GRE'	S075-100DGRE'	S075-100GRA'	S075-100PIN'	S075-100PUR'	S075-100RED'	S075-100TAN'	S075-100SS	S075-100SP
S075-15025COP'	S075-15025GRE'	S075-15025DGRE'	S075-15025GRA'	S075-15025PIN'	S075-15025PUR'	S075-15025RED'	S075-15025TAN'	S075-15025SS	S075-15025SP
S075-150COP'	S075-150GRE'	S075-150DGRE'	S075-150GRA'	S075-150PIN'	S075-150PUR'	S075-150RED'	S075-150TAN'	S075-150SS	S075-150SP
S075-20025COP'	S075-20025GRE'	S075-20025DGRE'	S075-20025GRA'	S075-20025PIN'	S075-20025PUR'	S075-20025RED'	S075-20025TAN'	S075-20025SS	S075-20025SP
S075-200COP'	S075-200GRE'	S075-200DGRE'	S075-200GRA'	S075-200PIN'	S075-200PUR'	S075-200RED'	S075-200TAN'	S075-200SS	S075-200SP
S075-250COP'	S075-250GRE'	S075-250DGRE'	S075-250GRA'	S075-250PIN'	S075-250PUR'	S075-250RED'	S075-250TAN'	S075-250SS'	S075-250SP'
S075-275COP'	S075-275GRE'	S075-275DGRE'	S075-275GRA'	S075-275PIN'	S075-275PUR'	S075-275RED'	S075-275TAN'	S075-275S'	S075-275SP'
S075-30025COP'	S075-30025GRE'	S075-30025DGRE'	S075-30025GRA'	S075-30025PIN'	S075-30025PUR'	S075-30025RED'	S075-30025TAN'	S075-30025SS	S075-30025SP
S075-300COP'	S075-300GRE'	S075-300DGRE'	S075-300GRA'	S075-300PIN'	S075-300PUR'	S075-300RED'	S075-300TAN'	S075-300SS	S075-300SP'
S075-325COP'	S075-325GRE'	S075-325DGRE'	S075-325GRA'	S075-325PIN'	S075-325PUR'	S075-325RED'	S075-325TAN'	S075-325SS'	S075-325SP'
S075-400COP'	S075-400GRE'	S075-400DGRE'	S075-400GRA'	S075-400PIN'	S075-400PUR'	S075-400RED'	S075-400TAN'	S075-400SS'	S075-400SP'

*Available upon request minimum order quantity 100

BULK QUANTITY? PERSONALIZED DESIGNS? SPECIAL REQUESTS?

Contact us today!

Our Signage Hardware Experts Will be Delighted To Assist You!

1-813-938-6025 • sales@mbs-standoffs.com



Barrels

Find diameter 1/4" to 3/4" in fold out →

17 Finishes – 14 Outdoor / 3 Indoor Use

CUSTOMIZE YOUR VERY OWN STANDOFF!

Mix and match between: Finish, Color, and Sizes

- Choose your cap



Standard



Locking



Rounded

- Choose your barrel



Aluminum




Stainless Steel

- Determine stud length

- Add your washers

- Don't forget your combination screws and anchors (pages 50-51)

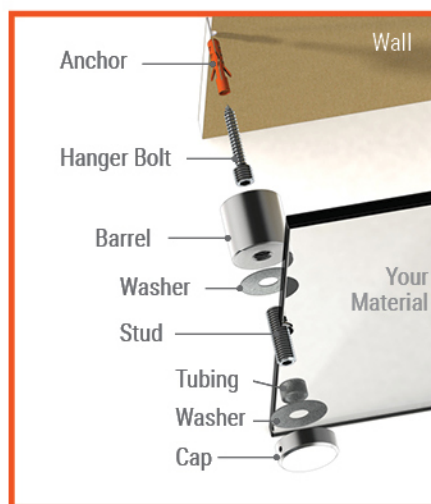

1. Insert anchor into wall
2. Add the combination screw to anchor
3. Screw barrel onto combination screw
4. Screw stud in barrel and add one washer
5. Place your material on the stud and add another washer
6. Screw cap onto stud
7. Take cap/stud, go through washers, material and screw into barrel

Barrels

7/8" to 2" Diameter Barrels


For 3/4" to 2" diameter barrels go to foldout page 43 on the previous spread.

17 Finishes, Indoor / Outdoor Use

Diameter	Barrel Height	Tapped	Tapped Length							
										
				Dull	Shiny	Black	Gold	Bronze	Antique Brass	Blue
7/8" (22.22 mm)	1/2"	1/4-20	Thru	S078-05025A	S078-05025AS	S078-05025B	S078-05025G	S078-05025AB	S078-05025BRA	S078-05025BLE
	1"	1/4-20	Thru	S078-10025A	S078-10025AS	S078-10025B	S078-10025G	S078-10025AB	S078-10025BRA	S078-10025BLE
	1 1/2"	1/4-20	Thru	S078-15025A	S078-15025AS	S078-15025B	S078-15025G	S078-15025AB	S078-15025BRA	S078-15025BLE
	2"	1/4-20	Thru	S078-20025A	S078-20025AS	S078-20025B	S078-20025G	S078-20025AB	S078-20025BRA	S078-20025BLE
	3"	1/4-20	Thru	S078-30025A	S078-30025AS	S078-30025B	S078-30025G	S078-30025AB	S078-30025BRA	S078-30025BLE
1" (25.4 mm)	1/4"	1/4-20	Thru	S100-02525A	S100-02525AS	S100-02525B	S100-02525G	S100-02525AB	S100-02525BRA	S100-02525BLE
	1/4"	5/16-18	Thru	S100-025A	S100-025AS	S100-025B	S100-025G	S100-025AB	S100-025BRA	S100-025BLE
	1/2"	1/4-20	Thru	S100-05025A	S100-05025AS	S100-05025B	S100-05025G	S100-05025AB	S100-05025BRA	S100-05025BLE
	1/2"	5/16-18	Thru	S100-050A	S100-050AS	S100-050B	S100-050G	S100-050AB	S100-050BRA	S100-050BLE
	3/4"	5/16-18	Thru	S100-075A	S100-075AS	S100-075B	S100-075G	S100-075AB	S100-075BRA	S100-075BLE
	1"	1/4-20	Thru	S100-10025A	S100-10025AS	S100-10025B	S100-10025G	S100-10025AB	S100-10025BRA	S100-10025BLE
	1"	5/16-18	Thru	S100-100A	S100-100AS	S100-100B	S100-100G	S100-100AB	S100-100BRA	S100-100BLE
	1 1/2"	1/4-20	Thru	S100-15025A	S100-15025AS	S100-15025B	S100-15025G	S100-15025AB	S100-15025BRA	S100-15025BLE
	1 1/2"	5/16-18	Thru	S100-150A	S100-150AS	S100-150B	S100-150G	S100-150AB	S100-150BRA	S100-150BLE
	2"	1/4-20	Thru	S100-20025A	S100-20025AS	S100-20025B	S100-20025G	S100-20025AB	S100-20025BRA	S100-20025BLE
	2"	5/16-18	Thru	S100-200A	S100-200AS	S100-200B	S100-200G	S100-200AB	S100-200BRA	S100-200BLE
	3"	1/4-20	1" Both Ends	S100-30025A	S100-30025AS	S100-30025B	S100-30025G	S100-30025AB	S100-30025BRA	S100-30025BLE
	3"	5/16-18	1" Both Ends	S100-300A	S100-300AS	S100-300B	S100-300G	S100-300AB	S100-300BRA	S100-300BLE
	4"	5/16-18	1" Both Ends	S100-400A	S100-400AS	S100-400B	S100-400G	S100-400AB	S100-400BRA	S100-400BLE
	6"	5/16-18	1" Both Ends	S100-600A	S100-600AS	S100-600B	S100-600G	S100-600AB	S100-600BRA	S100-600BLE
	8"	5/16-18	1" Both Ends	S100-800A	S100-800AS	S100-800B	S100-800G	S100-800AB	S100-800BRA	S100-800BLE
	10"	5/16-18	1" Both Ends	S100-1000A	S100-1000AS	S100-1000B	S100-1000G	S100-1000AB	S100-1000BRA	S100-1000BLE
	12"	5/16-18	1" Both Ends	S100-1200A	S100-1200AS	S100-1200B	S100-1200G	S100-1200AB	S100-1200BRA	S100-1200BLE
1 1/4" (31.75 mm)	1/4"	5/16-18	Thru	S125-025A	S125-025AS	S125-025B	S125-025G	S125-025AB	S125-025BRA	S125-025BLE
	1/2"	5/16-18	Thru	S125-050A	S125-050AS	S125-050B	S125-050G	S125-050AB	S125-050BRA	S125-050BLE
	5/8"	5/16-18	Thru	S125-058A	S125-058AS	S125-058B	S125-058G	S125-058AB	S125-058BRA	S125-058BLE
	1"	5/16-18	Thru	S125-100A	S125-100AS	S125-100B	S125-100G	S125-100AB	S125-100BRA	S125-100BLE
	1 1/2"	5/16-18	Thru	S125-150A	S125-150AS	S125-150B	S125-150G	S125-150AB	S125-150BRA	S125-150BLE
	2"	5/16-18	Thru	S125-200A	S125-200AS	S125-200B	S125-200G	S125-200AB	S125-200BRA	S125-200BLE
	3"	5/16-18	1" Both Ends	S125-300A	S125-300AS	S125-300B	S125-300G	S125-300AB	S125-300BRA	S125-300BLE
	4"	5/16-18	1" Both Ends	S125-400A	S125-400AS	S125-400B	S125-400G	S125-400AB	S125-400BRA	S125-400BLE
	5"	5/16-18	1" Both Ends	S125-500A	S125-500AS	S125-500B	S125-500G	S125-500AB	S125-500BRA	S125-500BLE
	6"	5/16-18	1" Both Ends	S125-600A	S125-600AS	S125-600B	S125-600G	S125-600AB	S125-600BRA	S125-600BLE
	7"	5/16-18	1" Both Ends	S125-700A	S125-700AS	S125-700B	S125-700G	S125-700AB	S125-700BRA	S125-700BLE
	8"	5/16-18	1" Both Ends	S125-800A	S125-800AS	S125-800B	S125-800G	S125-800AB	S125-800BRA	S125-800BLE
	9"	5/16-18	1" Both Ends	S125-900A	S125-900AS	S125-900B	S125-900G	S125-900AB	S125-900BRA	S125-900BLE
10"	5/16-18	1" Both Ends	S125-1000A	S125-1000AS	S125-1000B	S125-1000G	S125-1000AB	S125-1000BRA	S125-1000BLE	
12"	5/16-18	1" Both Ends	S125-1200A	S125-1200AS	S125-1200B	S125-1200G	S125-1200AB	S125-1200BRA	S125-1200BLE	
1 1/2" (38.10 mm)	1/4"	5/16-18	Thru	S150-025A	S150-025AS	S150-025B	S150-025N	S150-025AB	S150-025BRA	S150-025BLE
	1/2"	5/16-18	Thru	S150-050A	S150-050AS	S150-050B	S150-050G	S150-050AB	S150-050BRA	S150-050BLE
	1"	5/16-18	Thru	S150-100A	S150-100AS	S150-100B	S150-100G	S150-100AB	S150-100BRA	S150-100BLE
	2"	5/16-18	1" Both Ends	S150-200A	S150-200AS	S150-200B	S150-200G	S150-200AB	S150-200BRA	S150-200BLE
	3"	5/16-18	1" Both Ends	S150-300A	S150-300AS	S150-300B	S150-300G	S150-300AB	S150-300BRA	S150-300BLE
	4"	5/16-18	1" Both Ends	S150-400A	S150-400AS	S150-400B	S150-400G	S150-400AB	S150-400BRA	S150-400BLE
2" (50.80 mm)	1/4"	5/16-18	Thru	S200-025A	S200-025AS	S200-025B	S200-025G	S200-025AB	S200-025BRA	S200-025BLE
	1/2"	5/16-18	Thru	S200-050A	S200-050AS	S200-050B	S200-050G	S200-050AB	S200-050BRA	S200-050BLE
	1"	5/16-18	Thru	S200-100A	S200-100AS	S200-100B	S200-100G	S200-100AB	S200-100BRA	S200-100BLE
	2"	5/16-18	1" Both Ends	S200-200A	S200-200AS	S200-200B	S200-200G	S200-200AB	S200-200BRA	S200-200BLE
	4"	5/16-18	1" Both Ends	S200-400A	S200-400AS	S200-400B	S200-400G	S200-400AB	S200-400BRA	S200-400BLE
	3"	5/16-18	1" Both Ends	S200-300A	S200-300AS	S200-300B	S200-300G	S200-300AB	S200-300BRA	S200-300BLE



al For
ti-Mount
rojects!

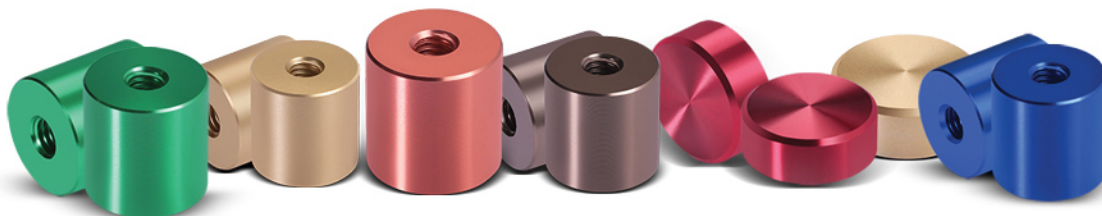

Aluminum								Stainless Steel	
									
Copper	Green	Dark Green	Graphite	Pink	Purple	Red	Tan	Brushed	Polished
S078-05025COP'	S078-05025GRE'	S078-05025DGRE'	S078-05025GRA'	S078-05025PIN'	S078-05025PUR'	S078-05025RED'	S078-05025TAN'	S078-05025SS	S078-05025SP
S078-10025COP'	S078-10025GRE'	S078-10025DGRE'	S078-10025GRA'	S078-10025PIN'	S078-10025PUR'	S078-10025RED'	S078-10025TAN'	S078-10025SS	S078-10025SP
S078-15025COP'	S078-15025GRE'	S078-15025DGRE'	S078-15025GRA'	S078-15025PIN'	S078-15025PUR'	S078-15025RED'	S078-15025TAN'	S078-15025SS	S078-15025SP
S078-20025COP'	S078-20025GRE'	S078-20025DGRE'	S078-20025GRA'	S078-20025PIN'	S078-20025PUR'	S078-20025RED'	S078-20025TAN'	S078-20025SS	S078-20025SP
S078-30025COP'	S078-30025GRE'	S078-30025DGRE'	S078-30025GRA'	S078-30025PIN'	S078-30025PUR'	S078-30025RED'	S078-30025TAN'	S078-30025SS	S078-30025SP
S100-02525COP'	S100-02525GRE'	S100-02525DGRE'	S100-02525GRA'	S100-02525PIN'	S100-02525PUR'	S100-02525RED'	S100-02525TAN'	S100-02525SS	S100-02525SP
S100-025COP'	S100-025GRE'	S100-025DGRE'	S100-025GRA'	S100-025PIN'	S100-025PUR'	S100-025RED'	S100-025TAN'	S100-025SS	S100-025SP
S100-05025COP'	S100-05025GRE'	S100-05025DGRE'	S100-05025GRA'	S100-05025PIN'	S100-05025PUR'	S100-05025RED'	S100-05025TAN'	S100-05025SS	S100-05025SP
S100-050COP'	S100-050GRE'	S100-050DGRE'	S100-050GRA'	S100-050PIN'	S100-050PUR'	S100-050RED'	S100-050TAN'	S100-050SS	S100-050SP
S100-075COP'	S100-075GRE'	S100-075DGRE'	S100-075GRA'	S100-075PIN'	S100-075PUR'	S100-075RED'	S100-075TAN'	S100-075SS	S100-075SP
S100-10025COP'	S100-10025GRE'	S100-10025DGRE'	S100-10025GRA'	S100-10025PIN'	S100-10025PUR'	S100-10025RED'	S100-10025TAN'	S100-10025SS	S100-10025SP
S100-100COP'	S100-100GRE'	S100-100DGRE'	S100-100GRA'	S100-100PIN'	S100-100PUR'	S100-100RED'	S100-100TAN'	S100-100SS	S100-100SP
S100-15025COP'	S100-15025GRE'	S100-15025DGRE'	S100-15025GRA'	S100-15025PIN'	S100-15025PUR'	S100-15025RED'	S100-15025TAN'	S100-15025SS	S100-15025SP
S100-150COP'	S100-150GRE'	S100-150DGRE'	S100-150GRA'	S100-150PIN'	S100-150PUR'	S100-150RED'	S100-150TAN'	S100-150SS	S100-150SP
S100-20025COP'	S100-20025GRE'	S100-20025DGRE'	S100-20025GRA'	S100-20025PIN'	S100-20025PUR'	S100-20025RED'	S100-20025TAN'	S100-20025SS	S100-20025SP
S100-200COP'	S100-200GRE'	S100-200DGRE'	S100-200GRA'	S100-200PIN'	S100-200PUR'	S100-200RED'	S100-200TAN'	S100-200SS	S100-200SP
S100-30025COP'	S100-30025GRE'	S100-30025DGRE'	S100-30025GRA'	S100-30025PIN'	S100-30025PUR'	S100-30025RED'	S100-30025TAN'	S100-30025SS	S100-30025SP
S100-300COP'	S100-300GRE'	S100-300DGRE'	S100-300GRA'	S100-300PIN'	S100-300PUR'	S100-300RED'	S100-300TAN'	S100-300SS	S100-300SP
S100-400COP'	S100-400GRE'	S100-400DGRE'	S100-400GRA'	S100-400PIN'	S100-400PUR'	S100-400RED'	S100-400TAN'	S100-400SS	S100-400SP
S100-600COP'	S100-600GRE'	S100-600DGRE'	S100-600DGRA'	S100-600PIN'	S100-600PUR'	S100-600RED'	S100-600TAN'	S100-600SS	S100-600SP
S100-800COP'	S100-800GRE'	S100-800DGRE'	S100-800DGRA'	S100-800PIN'	S100-800PUR'	S100-800RED'	S100-800TAN'	S100-800SS	S100-800SP
S100-1000COP'	S100-1000GRE'	S100-1000DGRE'	S100-1000DGRA'	S100-1000PIN'	S100-1000PUR'	S100-1000RED'	S100-1000TAN'	S100-1000SS	S100-1000SP
S100-1200COP'	S100-1200GRE'	S100-1200DGRE'	S100-1200DGRA'	S100-1200PIN'	S100-1200PUR'	S100-1200RED'	S100-1200TAN'	S100-1200SS	S100-1200SP
S125-025COP'	S125-025GRE'	S125-025DGRE'	S125-025GRA'	S125-025PIN'	S125-025PUR'	S125-025RED'	S125-025TAN'	S125-025SS	S125-025SP
S125-050COP'	S125-050GRE'	S125-050DGRE'	S125-050GRA'	S125-050PIN'	S125-050PUR'	S125-050RED'	S125-050TAN'	S125-050SS	S125-050SP
S125-058COP'	S125-058GRE'	S125-058DGRE'	S125-058GRA'	S125-058PIN'	S125-058PUR'	S125-058RED'	S125-058TAN'	S125-058SS	S125-058SP
S125-100COP'	S125-100GRE'	S125-100DGRE'	S125-100GRA'	S125-100PIN'	S125-100PUR'	S125-100RED'	S125-100TAN'	S125-100SS	S125-100SP
S125-150COP'	S125-150GRE'	S125-150DGRE'	S125-150GRA'	S125-150PIN'	S125-150PUR'	S125-150RED'	S125-150TAN'	S125-150SS	S125-150SP
S125-200COP'	S125-200GRE'	S125-200DGRE'	S125-200GRA'	S125-200PIN'	S125-200PUR'	S125-200RED'	S125-200TAN'	S125-200SS	S125-200SP
S125-300COP'	S125-300GRE'	S125-300DGRE'	S125-300GRA'	S125-300PIN'	S125-300PUR'	S125-300RED'	S125-300TAN'	S125-300SS	S125-300SP
S125-400COP'	S125-400GRE'	S125-400DGRE'	S125-400GRA'	S125-400PIN'	S125-400PUR'	S125-400RED'	S125-400TAN'	S125-400SS	S125-400SP
S125-500COP'	S125-500GRE'	S125-500DGRE'	S125-500GRA'	S125-500PIN'	S125-500PUR'	S125-500RED'	S125-500TAN'	S125-500SS	S125-500SP
S125-600COP'	S125-600GRE'	S125-600DGRE'	S125-600GRA'	S125-600PIN'	S125-600PUR'	S125-600RED'	S125-600TAN'	S125-600SS	S125-600SP
S125-700COP'	S125-700GRE'	S125-700DGRE'	S125-700GRA'	S125-700PIN'	S125-700PUR'	S125-700RED'	S125-700TAN'	S125-700SS	S125-700SP
S125-800COP'	S125-800GRE'	S125-800DGRE'	S125-800GRA'	S125-800PIN'	S125-800PUR'	S125-800RED'	S125-800TAN'	S125-800SS	S125-800SP
S125-900COP'	S125-900GRE'	S125-900DGRE'	S125-900GRA'	S125-900PIN'	S125-900PUR'	S125-900RED'	S125-900TAN'	S125-900SS	S125-900SP
S125-1000COP'	S125-1000GRE'	S125-1000DGRE'	S125-1000GRA'	S125-1000PIN'	S125-1000PUR'	S125-1000RED'	S125-1000TAN'	S125-1000SS	S125-1000SP
S125-1200COP'	S125-1200GRE'	S125-1200DGRE'	S125-1200GRA'	S125-1200PIN'	S125-1200PUR'	S125-1200RED'	S125-1200TAN'	S125-1200SS	S125-1200SP
S150-025COP'	S150-025GRE'	S150-025DGRE'	S150-025GRA'	S150-025PIN'	S150-025PUR'	S150-025RED'	S150-025TAN'	S150-025SS	S150-025SP
S150-050COP'	S150-050GRE'	S150-050DGRE'	S150-050GRA'	S150-050PIN'	S150-050PUR'	S150-050RED'	S150-050TAN'	S150-050SS	S150-050SP
S150-100COP'	S150-100GRE'	S150-100DGRE'	S150-100GRA'	S150-100PIN'	S150-100PUR'	S150-100RED'	S150-100TAN'	S150-100SS	S150-100SP
S150-200COP'	S150-200GRE'	S150-200DGRE'	S150-200GRA'	S150-200PIN'	S150-200PUR'	S150-200RED'	S150-200TAN'	S150-200SS	S150-200SP
S150-300COP'	S150-300GRE'	S150-300DGRE'	S150-300GRA'	S150-300PIN'	S150-300PUR'	S150-300RED'	S150-300TAN'	S150-300SS	S150-300SP
S150-400COP'	S150-400GRE'	S150-400DGRE'	S150-400GRA'	S150-400PIN'	S150-400PUR'	S150-400RED'	S150-400TAN'	S150-400SS	S150-400SP
S150-600COP'	S150-600GRE'	S150-600DGRE'	S150-600GRA'	S150-600PIN'	S150-600PUR'	S150-600RED'	S150-600TAN'	S150-600SS	S150-600SP
S200-025COP'	S200-025GRE'	S200-025DGRE'	S200-025GRA'	S200-025PIN'	S200-025PUR'	S200-025RED'	S200-025TAN'	S200-025SS	S200-025SP
S200-050COP'	S200-050GRE'	S200-050DGRE'	S200-050GRA'	S200-050PIN'	S200-050PUR'	S200-050RED'	S200-050TAN'	S200-050SS	S200-050SP
S200-100COP'	S200-100GRE'	S200-100DGRE'	S200-100GRA'	S200-100PIN'	S200-100PUR'	S200-100RED'	S200-100TAN'	S200-100SS	S200-100SP
S200-200COP'	S200-200GRE'	S200-200DGRE'	S200-200GRA'	S200-200PIN'	S200-200PUR'	S200-200RED'	S200-200TAN'	S200-200SS	S200-200SP
S200-400COP'	S200-400GRE'	S200-400DGRE'	S200-400GRA'	S200-400PIN'	S200-400PUR'	S200-400RED'	S200-400TAN'	S200-400SS	S200-400SP
S200-300COP'	S200-300GRE'	S200-300DGRE'	S200-300GRA'	S200-300PIN'	S200-300PUR'	S200-300RED'	S200-300TAN'	S200-300SS	S200-300SP

*Available upon request minimum order quantity 100

Silicone & Nylon Washer

Silicone Washers	Inside Diameter	Outside Diameter	Thickness	Item #
	5/16"	1/2"	0.06"	SW050
		5/8"		SW058
		3/4"		SW075
		7/8"		SW078
		1"		SW100
		1 1/4"		SW125

Nylon Washers	Inside Diameter	Outside Diameter	Thickness	Item #
	3/16"	3/8"	0.031"	NW038
		1/2"		NW0501024
	1/4"	5/8"	0.031"	NW058025
		3/4"		NW075025
		7/8"		NW078025
		1"		NW100025
	5/16"	1/2"	0.031"	NW050
		5/8"		NW058
		3/4"		NW075
		7/8"		NW078
		1"		NW100
		1 1/4"		NW125
		1 1/2"		NW150
		2"		NW200

1

Screw



2

Mount Head



3

Done Deal!



SCREW AND ANCHOR IN 3 EASY STEPS...

Aluminum Square Caps and Barrels

3 Finishes

- Wall mounted standoffs
- Designed from high quality aluminum
- Caps need your choice of stud length
- Don't forget your combination screws and anchors (page 52)



ALUMINUM FINISHES AVAILABLE FOR EACH DIAMETERS IN





**Ideal For
Multi-Mount
Projects!**



Aluminum Square Caps and Barrels

3 Finishes

Square Caps 5/16 – 18 Threaded

Diameter	Square	Aluminum		
				
3/4"	3/4" (19.0 mm)	CAP075SQA	CAP075SQB	CAP075SQG
1"	1" (25.4 mm)	CAP100SQA	CAP100SQB	CAP100SQG

Square Barrels 5/16 – 18 Threaded

Diameter	Square	Length	Tapped	Aluminum		
						
3/4"	3/4" (19.0 mm)	3/4" (19.0 mm)	Thru	S075-075SQA	S075-075SQB	S075-075SQG
	3/4" (19.0 mm)	1" (25.4 mm)	Thru	S075-100SQA	S075-100SQB	S075-100SQG
1"	1" (25.4 mm)	3/4" (19.0 mm)	Thru	S100-075SQA	S100-075SQB	S100-075SQG
	1" (25.4 mm)	1" (25.4 mm)	Thru	S100-100SQA	S100-100SQB	S100-100SQG

Use for drywall: screw HB5/16-125 and anchor ANC6, ANC6Z

Use for concrete: screw HB5/16-125 and anchor ANC2

Hole diameter to be drilled in your material: 3/8"



All packages are individually inspected multiple times by our certified shipping representatives to ensure your order is nothing less than perfect

1-813-938-6025
sales@mbs-standoffs.com



Studs Full Threaded

Studs 304 Stainless Steel Grade For Customizable Line

	Thread Size	Material	Length	Item #
	#4-40	Stainless Steel	1"	SST440-100
			2"	SST440-200
			5/8"	SST632-100
	#6-32	Stainless Steel	1"	SST632-100
			1 1/2"	SST632-150
			2"	SST632-200
			3"	SST632-300
	#10-24	Stainless Steel	5/8"	SST1024-062
			1"	SST1024-100
			1 1/2"	SST1024-150
			2"	SST1024-200
			3"	SST1024-300
			4"	SST1024-400
			5"	SST1024-500
			6"	SST1024-600
	1/4-20	Stainless Steel	1"	SST1420-100
			2"	SST1420-200
			3"	SST1420-300
			4"	SST1420-400
			5"	SST1420-500
			6"	SST1420-600
	5/16-18	Stainless Steel	5/8"	SST51618-062
			1"	SST51618-100
			1 1/2"	SST51618-150
			2"	SST51618-200
			3"	SST51618-300
			4"	SST51618-400
			5"	SST51618-500
	3/8-16	Stainless Steel	4"	SST3816-400
			5"	SST3816-500
			6"	SST3816-600

Studs Full Threaded


Aluminum Studs For Customizable Line

	Thread Size	Material	Length	Item #
	#6-32	Aluminum	1 1/2"	AST632-150
			2"	AST632-200
	#10-24	Aluminum	1"	AST1024-100
			1 1/2"	AST1024-150
			2"	AST1024-200
			2 1/2"	AST1024-250
			3"	AST1024-300
			4"	AST1024-400
			5"	AST1024-500
			6"	AST1024-600
	1/4-20	Aluminum	2"	AST1420-200
			3"	AST1420-300
			4"	AST1420-400
			5"	AST1420-500
			6"	AST1420-600
	5/16-18	Aluminum	5/8"	AST51618-062
			1"	AST51618-100
			1 1/2"	AST51618-150
			2"	AST51618-200
			3"	AST51618-300
			4"	AST51618-400
			5"	AST51618-500
			6"	AST51618-600


Hardware Multi-Mount Standoffs

Special Brass stud to create any Multi-Mount Signage

- 1/4-20 Thread

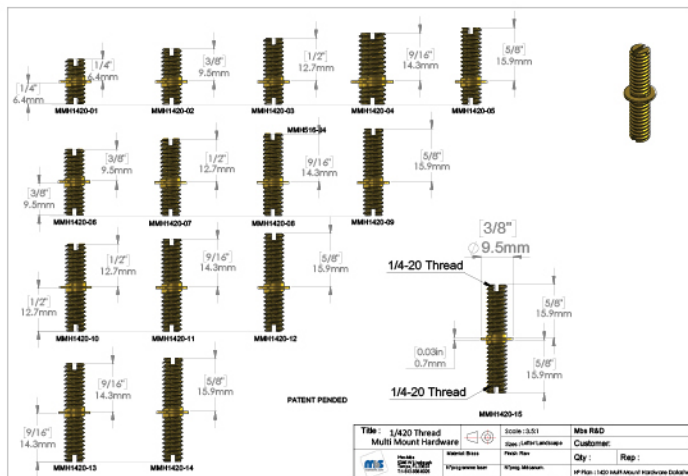


- 5/16-18 Thread

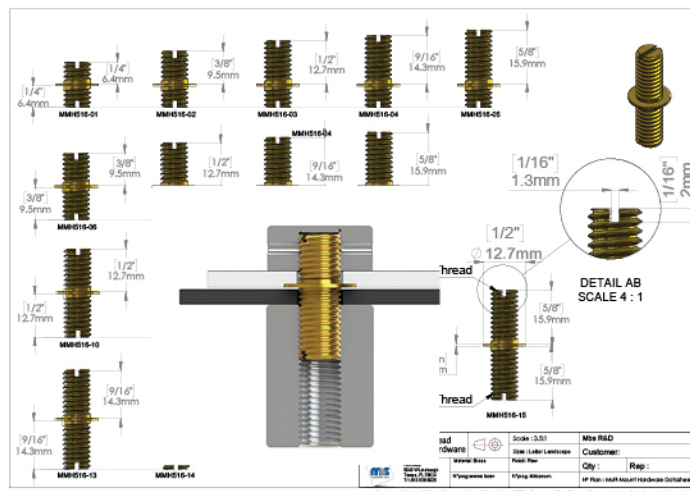

Aluminum Hub for Customizable Standoffs

- Can hold 4 panels on the corner
- 3 Different diameters
- 3 Different material thickness's

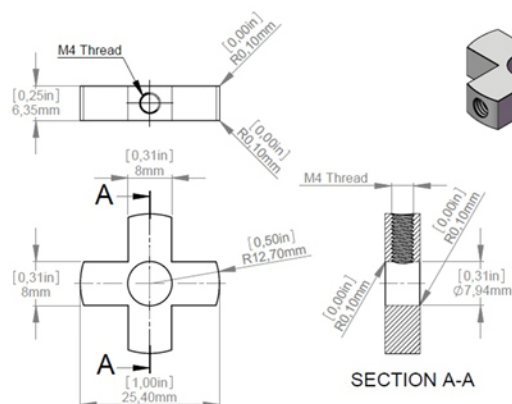

Diameter	Material Thickness	Anodized Aluminum	
		Clear	Black
1" 3/8" Hole Diameter (to be drilled in material)	1/4" (6.35 mm)	H100-025A	H100-025B
	3/8" (9.52 mm)	H100-038A	H100-038B
	1/2" (12.7 mm)	H100-050A	H100-050B
1 1/4" 3/8" Hole Diameter (to be drilled in material)	1/4" (6.35 mm)	H125-025A	H125-025B
	3/8" (9.52 mm)	H125-038A	H125-038B
	1/2" (12.7 mm)	H125-050A	H125-050B
1 1/2" 3/8" Hole Diameter (to be drilled in material)	1/4" (6.35 mm)	H150-025A	H150-025B
	3/8" (9.52 mm)	H150-038A	H150-038B
	1/2" (12.7 mm)	H150-050A	H150-050B



Hardware for Customizable Standoffs

Set Screw Studs 304 Stainless Steel Grade

Studs are used to join the cap and barrel. Because this is a custom setup, you will need to determine the length that is required.

	Thread Size	Hole Diameter	Allen Key Size	Material Thickness	Length	Item #
 For Caps & Barrels 1/4" Diameter. Add 3/8" to material thickness to pick correct stud.	#6-32	1/8"	1/16"	3/8"	1/4"	SC6/32-01
					3/8"	SC6/32-02
					1/2"	SC6/32-03
					5/8"	SC6/32-06
					3/4"	SC6/32-04
					1"	SC6/32-05
 For Caps & Barrels 3/8", 1/2" Diameter. Add 3/8" to material thickness to pick correct stud.	#10-24	7/32"	3/32"	7/16"	1/4"	SC10/24-02
					3/8"	SC10/24-03
					1/2"	SC10/24-04
					5/8"	SC10/24-05
					3/4"	SC10/24-09
					7/8"	SC10/24-12
					1"	SC10/24-06
					1 1/4"	SC10/24-10
					1 1/2"	SC10/24-07
					2"	SC10/24-08
 Add 1/2" to material thickness to pick correct stud.	1/4-20	5/16"	1/8"	1/2"	5/16"	SC1/420-03
					3/8"	SC1/420-04
					1/2"	SC1/420-05
					5/8"	SC1/420-06
					3/4"	SC1/420-07
					1"	SC1/420-08
					1 1/4"	SC1/420-09
					1 1/2"	SC1/420-10
					2"	SC1/420-11
 Add 1/2" to material thickness to pick correct stud.	5/16-18	3/8"	5/32"	1/2"	5/32"	SC5/16-01
					1/4"	SC5/16-02
					3/8"	SC5/16-03
					1/2"	SC5/16-04
					5/8"	SC5/16-05
					3/4"	SC5/16-06
					7/8"	SC5/16-07
					1"	SC5/16-08
					1 1/8"	SC5/16-09
					1 1/4"	SC5/16-10
					1 1/2"	SC5/16-11
					1 3/4"	SC5/16-12
					2"	SC5/16-13
					3"	SC5/16-30
					4"	SC5/16-40

Tempered glass is most vulnerable on its edges and may break from contact with the metal standoff. We recommend using washers and plastic tubing with glass materials. Washers protect the glass from the metal standoff preventing breakage.

Plastic Tubing

	Inside Diameter	Outside Diameter	Length	Item #
 For 1/4" 20 Stud	1/4"	3/8"	1/4"	PT025250
			3/8"	PT025375
			1/2"	PT025500
			3/4"	PT025750
 For 5/16" 18 Stud	5/16"	7/16"	1/4"	PT250
			3/8"	PT375
			1/2"	PT500
			3/4"	PT750

Hardware for Customizable Standoffs

	Description	For	Diameter	Length	Item #
	Zinc Combination Screw	Anchor: ANC1, ANC5 ANC5Z, ANC5ZS	6-32	1" 3/4" 1 1/2"	HB632 HB632-075Z HB632-150Z
	Bit Driver	Combination Screw	6-32		16766
	Zinc Combination Screw	Anchor: ANC1, ANC5 ANC5Z	10-24	1"	HB1024
	Zinc Combination Screw		10-24	1 1/2"	HB1024-12
	Zinc Combination Screw		10-24	2"	HB1024-2
	Anchor with Combination Screw	Anchor Included	10-24		ANC5Z1024S
	Bit Driver	Combination Screw	10-24		400.424
	Zinc Combination Screw Stainless Steel	ANC1, ANC5, ANCZ	1/4-20	1"	HB1/4-100Z HB1/4-100
	Zinc Combination Screw	Anchor: ANC4	1/4-20	1 1/2"	HB1/4-150
	Bit Driver	Combination Screw	1/4-20		16769
	Spring Toggle Wings	Screw: HB1/4-200	1/4-20		TBW025
	Stainless Steel Combination Screw	Anchor: ANC1, ANC5, ANC5Z	#6	1"	HB5/16-100
	Zinc Combination Screw	Anchor: ANC1, ANC5, ANC5Z	#6	1"	HB5/16-100Z
	Stainless Steel Combination Screw	Anchor: ANC2, ANC6, ANC6Z	#8	1 1/4"	HB5/16-125
	Zinc Combination Screw	Anchor: ANC2, ANC6, ANC6Z	#8	1 1/4"	HB5/16-125Z
	Stainless Steel Combination Screw	No Anchor Included	#8	2"	HB5/16-2
	Zinc Anchor with Combination Screw HB5/16-100	Anchor Included	5/16-18		ANC5ZS
	Hex Head Insert Bit 5/32"	Combination Screw			HEXBIT5/32
	Zinc Anchor with Combination Screw HB5/16-125	Anchor Included	5/16-18		ANC6ZS
	Hex Head Insert Bit 1/8"	Combination Screw			HEXBIT1/8
	#6 Stainless Steel Screw and Anchor Package for Concrete				SACW6
	#8 Stainless Steel Screw and Anchor Package for Concrete				SACW8
	#6 Stainless Steel Screw and Nylon Anchor Package for Drywall				SADW6
	#8 Stainless Steel Screw and Nylon Anchor Package for Drywall				SADW8
	#6 Stainless Steel Screw and Zinc Anchor Package for Drywall				SANDW6Z
	#8 Stainless Steel Screw and Zinc Anchor Package for Drywall				SANDW8Z

Hardware for Customizable Standoffs

For Drywall and Concrete

	Description	For	Diameter	Length	Item #
	Plastic Anchor for Concrete Drill Size 1/4"	Screw: #6	#6		ANC1
	Plastic Anchor for Concrete Drill Size 1/4"	Screw: #8	#8		ANC2
	Plastic Anchor for Drywall	Screw: #6	#6		ANC5
	Zinc Anchor for Drywall	Screw: #6	#6		ANC5Z
	Plastic Anchor for Drywall	Screw: #8	#8		ANC6
	Zinc Anchor for Drywall	Screw: #8	#8		ANC6Z
	Nylon Toggle Wings	Screw: #8	Pre-Drill 9/16"		TBW9
	Nylon Toggle Tool	Anchor: TBW9			TBW9K
	Combination Screw For Toggle Wing #6	Anchor: TBW8	5/16-18 to #8-32	2"	HB5/16-200
	Spring Toggle Wings	Screw: HB5/16-200	Pre-Drill 9/16"		TBW8
	Zinc Steel Combination Screw For Toggle Wing #6	Anchor: TBW6	1/4-20 to #6-32	2"	HB025-200
	Spring Toggle Wings	Screw: HB025-200	Pre-Drill 3/8"		TBW6
	Zinc Hanger Bolt, Length:	None	5/16-18 to 12	1 1/2"	HB5/16-150
	Zinc Combination Screw	None	#8	1 1/4"	HB5/16-150Z
	Stainless Steel Combination	None	5/16 to #12	2"	HB5/16-2
	Steel Zinc Combination Screw	None	5/16 to #12	4"	HB5/16-4
	Stainless Steel M4 Combination Screw		M4		400.700
	5/16 Thread Insert Sold without screw		5/16	1/4"	Insert516
	Screw for Insert 5/16	Anchor: TBW6	6/32	2 1/2"	2200Z
	Toggle Bolt Wings	Screw: 2200Z	Pre-Drill 3/8"		TBW6
	Hex Head Insert Bit		1/8"	2"	HEXBIT1/8
	Hex Head Insert Bit		5/32"	2"	HEXBIT5/32
	Conversion Set Screw	Thread 5/16-18 to 1/4-20		7/8"	CSC1
	Conversion Set Screw	Thread 5/16-18 to 1/4-20		1 5/16"	CSC2
	Conversion Set Screw	Thread 5/16-18 to 1/4-20		1 13/16"	CSC3
	Conversion Set Screw	Thread 5/16-18 to 10-24		9/16"	CSC4
	Conversion Set Screw	Thread 5/16-18 to 1/4-20		3 1/16"	CSC5
	Phillips Zinc Plated Steel Flat Head Screw		#6 #8	1"	2431 2438

Machine Screws, Flat / Pan Head

Machine screws Zinc plated



Flat



Pan

Description	Thread	Length	Flat #	Pan #
6-32 Machine Screws, Phillips, Zinc Plated Steel	6-32	3/16"	9325	
		1/4"	7601	
		5/16"	9326	
		3/8"	1487	
		7/16"	9327	
		1/2"	1488	1542
		5/8"	1489	1543
		3/4"	1490	1544
		7/8"	9328	9228
		1"	1491	1545
		1 1/4"	1492	1546
		1 1/2"	1493	1547
		2"	1494	1548
10-24 Machine Screws, Phillips, Zinc Plated Steel	10-24	5/16"	9545	9242
		1/4"		9241
		3/8"	1507	1561
		1/2"	1508	1562
		5/8"	1509	1563
		3/4"	1510	1564
		7/8"	9546	
		1"	1511	1565
		1 1/4"	1512	1566
		1 1/2"	1513	1567
		1 3/4"	9547	
1/4-20 Machine Screws, Phillips, Zinc Plated Steel	1/4-20	2"	1514	1568
		3/8"	1529	
		1/2"	1530	1584
		5/8"	1531	
		3/4"	1532	1586
		7/8"	9573	
		1"	1533	1587
		1 1/4"	1534	
		1 1/2"	1535	
		1 3/4"	9574	
5/16-18 Machine Screws, Phillips, Zinc Plated Steel	5/16-18	2"	1536	
		1/2"	9580	
		3/4"	9581	9284
		7/8"		9285
		1"		9286
		1 1/4"	9583	9287
		1 1/2"	9584	9288
		1 3/4"	9585	
		2"	9586	

Tools for Customizable Standoffs

	Description	For	Item #
	68 Piece Tool Set		SETBIT
	Screw Driver for Hex 1/4 Bit with Ergonomic Rubber Handle		61300
	Mini Stubby Handle for Hex 1/4 Bit		61200
	1/4 Magnetic Bit Holder		MBH1/4
	Allen Key 5/32"	All of 5/16 Studs	ALLENK5/32
	Allen Key M3		AllenKM3
	Allen Key M4		AllenM4
	Allen Key M5		AllenKM5
	Allen Key M6		AllenKM6
	Allen Key 1/8"	Hanger Bolt HB5/16-100, HB5/16-100(Z), HB5/16-125(Z) HB5/16-125(Z)	ALLENK1/8
	Bit Driver	HB632 Screws	16766
	Bit Driver	HB1024 Screws, 1024-2, 1024-12	400.424
	Bit Driver	HB1/4-100(Z) & HB1/4-150 (Z)	16769
	Hex Head Insert Bit 1/8"	Hanger Bolt HB5/16-100 (Z), HB5/16-100(Z),	HEXBIT1/8
	Hex Head Insert Bit 5/32"	Hanger Bolt HB5/16-125 (Z), HB5/16-125(Z)	HEXBIT5/32
	Steel Hex Drill Bit 5/32"		HDB532
	Steel Hex Drill Bit 1/4"		HDB14
	Locking Cap Tool	For Aluminum and Stainless Steel Locking Caps	LS01
	Thread Glue	Secure studs in place	TG01



Item #: SETBIT



Item #: 61300



Item #: 61200



SCREW CAP COVERS



p58



p61



p61



Screw Cap Covers

Set of 4 Screw Covers – For Indoor and Outdoor Use

- Designed from high quality stainless steel & aluminum
- Designed for flush mounted projects
- 6 different diameters
- 8 different finishes (6 Aluminum, 2 Stainless Steel)
- For indoor or outdoor
- Includes: threaded brass insert
- Easy to use
- Screws and anchors sold separately



Set of 4 Brass Inserts





SKU: SCBINSERT

8 DIFFERENT FINISHES

Aluminum



Stainless Steel



Screw Cap Covers

Set of 4 Screw Covers – For Indoor and Outdoor Use

Diameter	Cap Height	Aluminum					
							
		Clear	Shiny	Black	Gold	Bronze	Titanium
1/2" (12 mm)	1/4"	SC12A	SC12AS	SC12B	SC12G	SC12AB	SC12T
5/8" (16 mm)	1/4"	SC16A	SC16AS	SC16B	SC16G	SC16AB	SC16T
3/4" (18 mm)	1/4"	SC18A	SC18AS	SC18B	SC18G	SC18AB	SC18T
13/16" (20 mm)	1/4"	SC20A	SC20AS	SC20B	SC20G	SC20AB	SC20T
7/8" (22 mm)	1/4"	SC22A	SC22AS	SC22B	SC22G	SC22AB	SC22T
1" (25 mm)	1/4"	SC25A	SC25AS	SC25B	SC25G	SC25AB	SC25T


Use for drywall: screw 2208 and anchor ANC5. Use for concrete: screw 2208 and anchor ANC1
*Available upon request minimum order quantity 100




Stainless Steel			
			
Brushed Inside Use	Brushed Inside / Outside Use	Polished Inside Use	Polished Inside / Outside Use
SC12SSS	SC12SS304	SC12SSP*	SC12SSP304*
SC16SSS	SC16SS304	SC16SSP*	SC16SSP304*
SC18SSS	SC18SS304	SC18SSP*	SC18SSP304*
SC20SSS	SC20SS304	SC20SSP*	SC20SSP304*
SC22SSS	SC22SS304	SC22SSP*	SC22SSP304*
SC25SSS	SC25SS304	SC25SSP*	SC25SSP304*

INSTALLATION GUIDE

1. First mark your surface for the holes.
2. Next you will want to drill a hole and insert your anchors.
3. Then, drop your #6 screw through the threaded brass insert and screw it through your material into the anchor.
4. Finally, just screw the cover over the threaded insert, step back, and admire your beautiful display!



99% of Orders Ship Same Day!

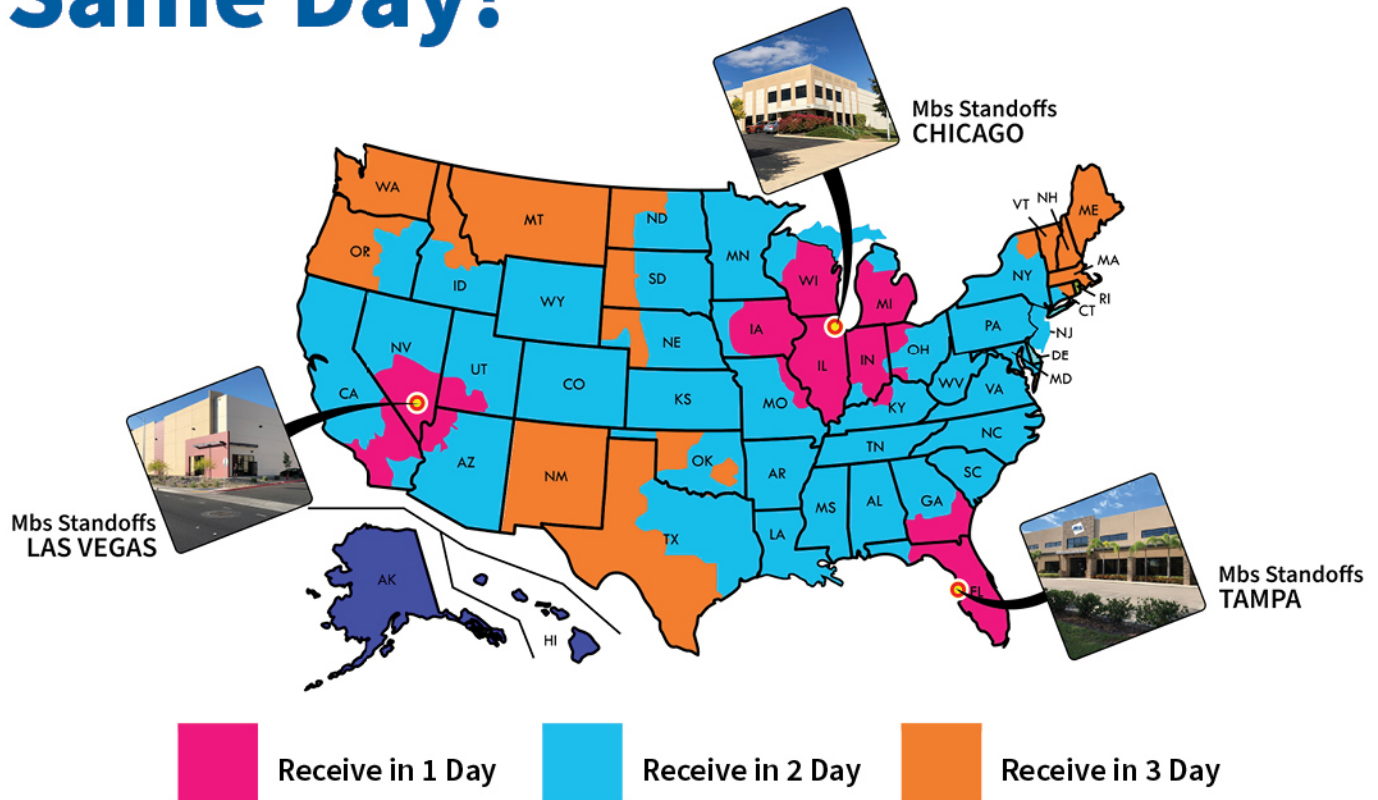

Free Daily Pickup and 1 or 2 Days Ground Shipping to Most of the States

Daily Pick-ups

- We have a daily pick-up, so that all of our customers can take advantage of same day shipping.
- **Blind Shipping & Drop Shipping Available Upon Request (Fees may apply)**
- Don't forget we can always ship on your account.
- If you are local, you can pick up your order within 30 minutes of placing your order.



Monday–Thursday up to 6:30pm,
Friday up to 5:30pm



Monday–Thursday up to: 6:30pm,
Friday up to 5:30pm



Shipping to Canada with Fedex, UPS & USPS, and anywhere in the world with DHL

Stainless Steel Tamper Proof Washer and Torx Screw

For Indoor and Outdoor Use



18-8 stainless steel Set of 4


5/8" (16 mm) Diameter washer with #8 Sheet Metal screws – torx – flat head

Diameter	Driver	Item #
5/8" (16 mm)	T20	WSC-1
Torx Bit Driver	T20	101020

Use for drywall: anchor ANC6, ANC6Z

Use for concrete: anchor ANC2

Thickness of material accepted: up to 1/2" (12 mm)

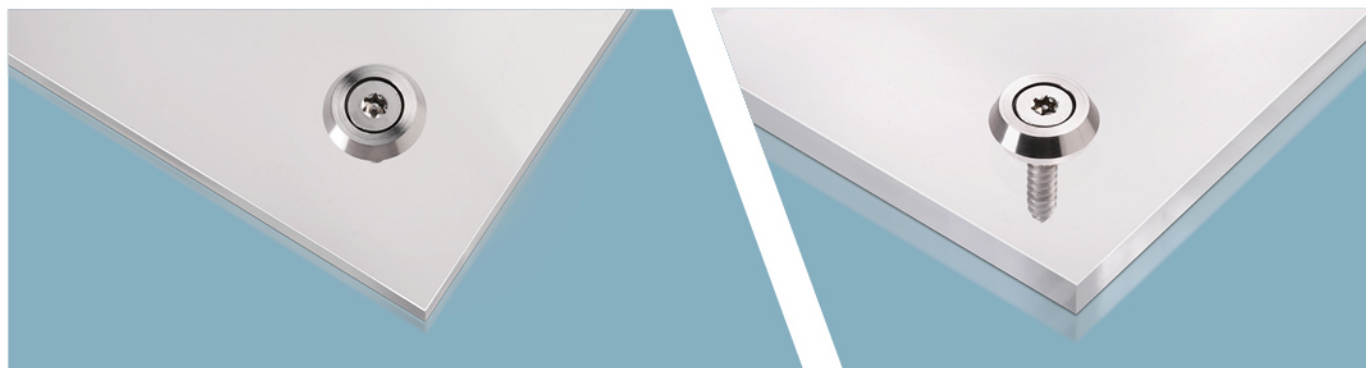

Stainless Steel Tamper Proof Screw

For Indoor and Outdoor Use

NEW
PRODUCT



Description	Drive	Length	Item #
 #8 Sheet Metal Screws Torx – Flat Head Stainless Steel 18-8	T20	1/2"	91800
		5/8"	91805
		3/4"	91810
		1"	91820
		1 1/4"	91830
		1 1/2"	91840
 10-24 Machine Screw Torx – Flat Head Stainless Steel 18-8	T20	3/8"	91600
		1/2"	91605
		5/8"	91608
		3/4"	91610
		1"	91615
		1 1/4"	91620
		1 1/2"	91625



Item #: SETBIT



Item #:
MBH1/4



Item #:
61300



Item #:
61200

Description	Item #
68 Piece Tool Set	SETBIT
Screw Driver for Hex 1/4 Bit with Ergonomic Rubber Handle	61300
Mini Stubby Handle for Hex 1/4 Bit	61200
1/4 Magnetic Bit Holder	MBH1/4
Torx Tamper Proof: T10 BIT	101000
Torx Tamper Proof: T15 BIT	101010
Torx Tamper Proof: T20 BIT	101020
1.5 mm Stubby Driver for Standoffs and Cable Systems	STUBBY15
2.0 mm Stubby Driver for Standoffs and Cable Systems	STUBBY2
2.5 mm Stubby Driver for Standoffs and Cable Systems	STUBBY25
3.0 mm Stubby Driver for Standoffs, Signage and Cable Systems	STUBBY3




Screw Cover Caps

Cover Up Exposed fixings with ScrewCaps



Snap-Caps

Snap-Caps are the best and most secure way to cover and protect screws, fixings and fasteners.




Electroplated Snap-Caps

Electroplated Snap-Caps give a high-quality finish on polished metal, mirrors, glass, and other high-gloss surfaces. The finish is tough and durable, and is resistant to most household cleaning products. Electroplated Snap-Caps will withstand the elements and last as long as the chrome-plated badges on your car.



Bifix Caps

Low-profile Press-in caps for Pozi & Phillips screws, Bifix Caps are the ultimate 'Pozi' caps, that press into the drive recess of countersunk screws. Bifix Caps fit Pozi and Phillips head screws that have a No.2 drive recess.



Stemfix Caps

Stemfix (aka "Pin Caps") are low-profile plastic caps, which achieve a secure grip when used in special drilled "head-hole" screws, such as 'SupaChip' or Conformat screws. Stemfix have a positive grip that is easy to fit, but not-so easy to remove. This makes Stemfix caps an ideal way to hide screws & fixings



QUICK SNAP STANDOFFS



p66



p68



p69

Quick Snap Standoffs

Our selection of quick fasteners for cut out letters the «Quick Snap» system is used for the installation of letters in relief. No drilling no screws visible on the face of the letters. The system is very simple and quick to use.

- 9 different sizes
- 4 different colors
- Adhesive or screw mounted option



Select the Best item with this Easy to Use Chart


Item	Maximum Height for Letter	Maximum weight per «QS»	Use
Mini	7 7/8" (200 mm)	0.55 lb (250 g)	indoor & outdoor
Small	7 7/8" (200 mm)	0.55 lb (250 g)	indoor & outdoor
Medium	9 13/16" (250 mm)	0.55 lb (250 g)	indoor & outdoor
Large	9 13/16" (250 mm)	0.55 lb (250 g)	indoor & outdoor
Big	9 13/16" (250 mm)	0.55 lb (250 g)	indoor & outdoor
Extra Big	15 3/4" (400 mm)	0.88 lb (400 g)	indoor & outdoor
Jumbo	27 9/16" (700 mm)	1.54 lb (700 g)	indoor & outdoor
Giant	27 9/16" (700 mm)	1.54 lb (700 g)	indoor & outdoor
Oval	15 3/4" (400 mm)	0.77 lb (350 g)	indoor & outdoor



Quick Snap Standoffs


Installation in 5 Easy Steps

ADHESIVE MOUNTED

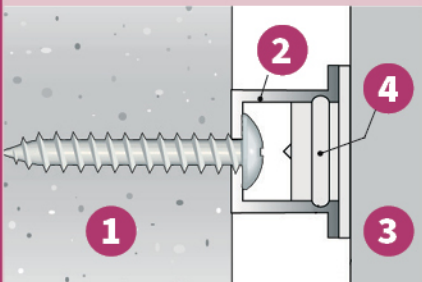

1. Surface
2. Body with screw
3. Letter
4. Head with adhesive

SCREW MOUNTED

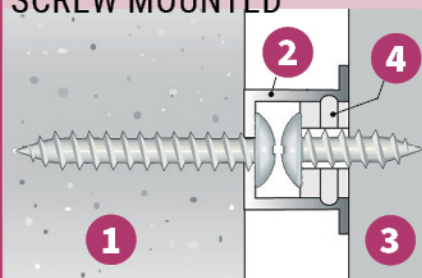

1. Surface
2. Body with screw
3. Letter
4. Head with screw

The directions below are general installation recommendations. The weight of each fastener depends on the conditions of use. To avoid unnecessary tension it is advised to avoid over tightening of the body support.



- 1 Using adhesive place the Head support on the back of the letters.



- 2 Place the letter against the template and use pressure to mark placement of pilot holes.



- 3 Place template and drill appropriately.



- 4 Attach Body ends in correct positions.



- 5 Securely Snap the letters into place using slight pressure.




Quick Snap fasteners can be properly secured by using our Quick Snap adhesive for all letters made from acrylic or expanded PVC, or, by using our 2 component adhesive for letters out of aluminum, brass, stainless or multi layer aluminum enamel.




- Always use stainless steel screws.
- Tighten the screws through the fastener, then loosen a quarter of a turn.
- The fasteners must be used exclusively for letters.
- Use one fastener per 4" (10 cm)

Quick Snap Standoffs


Mini

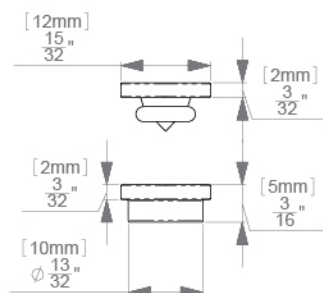


Large / Screw

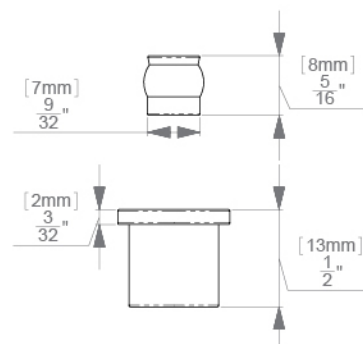


Small




Big




Medium




Extra Big

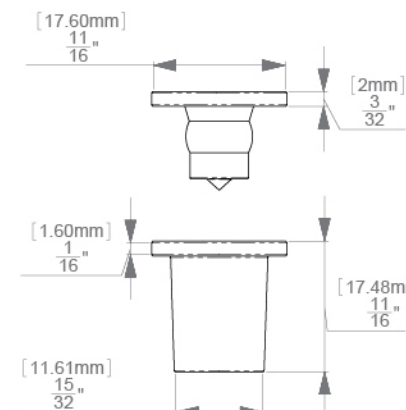

Large / Adhesive

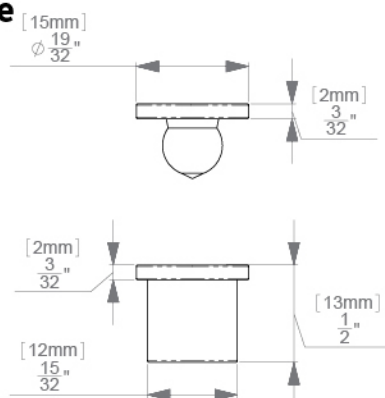


Extra Big/Screw

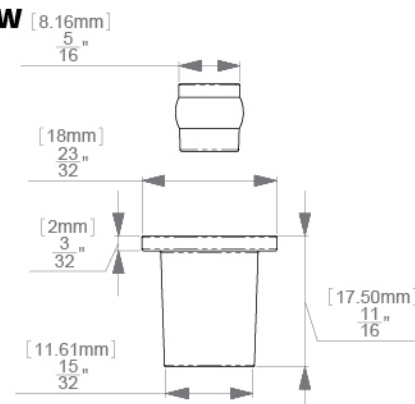


Quick Snap Standoffs


Jumbo / Adhesive




Giant

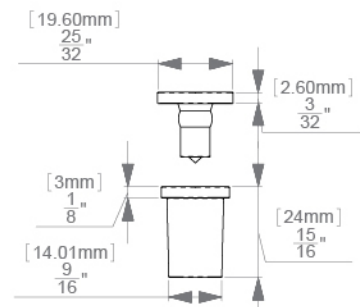

Jumbo/Screw



Oval



Name	Diameter	Rated Strength per Quick Snap	Distance from the wall	Tightening Method	Black	White	Grey	Clear
Mini	1/2"	0.55 lbs	1/4"	Adhesive mounted head	QSASB1HK	QSASB2HK	QSASB3HK	QSASB4HK
Small	3/8"	0.55 lbs	3/8"	Adhesive mounted head	QSBSB1HK	QSBSB2HK	QSBSB3HK	QSBSB4HK
Medium	3/8"	0.55 lbs	1/2"	Adhesive mounted head	QSCSB1HK	QSCSB2HK	QSCSB3HK	QSCSB4HK
Large	5/8"	0.55 lbs	5/8"	Adhesive mounted head	QSDSB1HK	QSDSB2HK	QSDSB3HK	QSDSB4HK
			1/2"	Screw On	QSDSB1HS	QSDSB2HS	QSDSB3HS	QSDSB4HS
Big	1/2"	0.55 lbs	3/4"	Adhesive mounted head	QSESB1HK	QSESB2HK	QSESB3HK	QSESB4HK
Extra Big	3/4"	0.88 lbs	3/4"	Adhesive mounted head	QSFBS1HK	QSFBS2HK	QSFBS3HK	QSFBS4HK
			3/4"	Screw On	QSFBS1HS	QSFBS2HS	QSFBS3HS	QSFBS4HS
Jumbo	3/4"	1.54 lbs	1"	Adhesive mounted head	QSGSB1HK	QSGSB2HK	QSGSB3HK	QSGSB4HK
			7/8"	Screw On	QSGSB1HS	QSGSB2HS	QSGSB3HS	QSGSB4HS
Giant	3/4"	1.54 lbs	1 1/8"	Adhesive mounted head	QSHSB1HK	QSHSB2HK	QSHSB3HK	QSHSB4HK
Giant	3/4"	1.54 lbs	1 1/16"	Screw On				QSHSB4HS
Oval	7/8" x 3/4"	0.88 lbs	7/8"	Adhesive mounted head	QISIS1HK	QISIS2HK	QISIS3HK	QISIS4HK

Quantity Per Bag: 250 Set

Sample Kit

Assorted Sizes for your review.
Refunded with your first order



Glue



	Item #		Item #
Quick Snap Letter System Glue		0.71 oz (20 gr)	QSXGLU1
Quick Snap Letter System 2 component Glue		1.69 fl oz (50 ml)	QSXGLU2



Quick Snap Standoffs


Expander Q.S. Bags of 10.

**Adhesive
or
Screw Mounted**

Expander I

- Adjustable standoff from 1 5/8" to 2 1/8"
- Diameter: 7/8" (22 mm)
- Adhesive or screw mounted
- Easily removable
- TREATED ANTI U.V. !!
- Standard: V-2 UL 94 temp. 122 Ca 1.8 Mpa
- & EN 50107


Color	Item #
Clear	QSJSB4H



Expander I XL

- Adjustable standoff from 1 5/8" to 2 1/8"
- Diameter: 1 5/8" (40 mm)
- Adhesive or screw mounted
- Easily removable
- TREATED ANTI U.V.
- Standard: V-2 UL 94 temp. 122 Ca 1.8 Mpa
- & EN 50107


Color	Item #
Clear	QSKSB4H



Expander II

- Adjustable standoff from: 2 1/2" to 3 3/8"
- Diameter: 7/8" (22 mm)
- Adhesive or screw mounted
- Easily removable
- TREATED ANTI U.V.
- Standard: V-2 UL 94 temp. 122 Ca 1.8 Mpa
- & EN 50107


Color	Item #
Clear	QSLSB4H



Expander II XL

- Adjustable standoff from: 2 1/2" to 3 3/8"
- Diameter: 1 5/8" (40 mm)
- Adhesive or screw mounted
- Easily removable
- TREATED ANTI U.V.
- Standard: V-2 UL 94 temp. 122 Ca 1.8 Mpa
- & EN 50107

Color	Item #
Clear	QMSB4H



Button-fix is a hidden flush mount system that allows one to hang signs and panels with ease. Choose from either a screw mounted application or adhesive.

Technical Information

Button and Fix Sets

Wood Screw




Item# 171-018-11

Euro Screw



Item# 171-018-12

Type1 Flush Mount

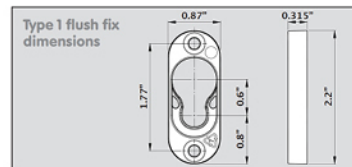

Button Parts




Item# 171-018-1

Metal



Item# 171-021-11

Type 1

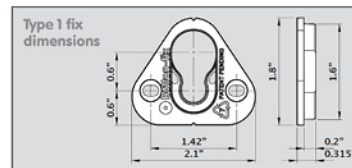

Item# 171-001-11




Item# 171-001-12



Item # 171-001-1

Type1 Bonded

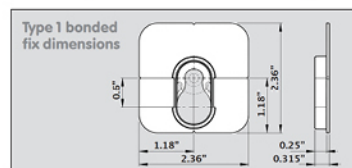

Item# 171-017-11




Item# 171-017-12



Item# 171-017-1

Type 2 Side Fix

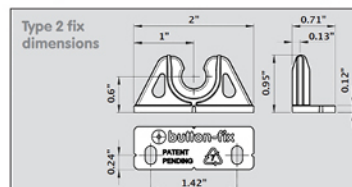

Item# 171-004-11



Item# 171-004-12



Item# 171-004-1

Starter Kit



Item# 171-001-20

Sample Kit



Item# 171-001-21

Wood Screw



Item# 171-002-1

Button Screw

Euro Screw



Item# 171-002-2

*Accessorie on next page

The Button

There are two buttons to suit different screw types. These are color-coded lime green for #10 flat head wood screws, or orange for 6.2mm Varianta Euro screws (to fit 0.5mm pilot holes).

Check with your panel supplier which screw type is best for your application.

Button marker accessory

The Button marker accessory helps to mark out where to install the Buttons. Once you have attached the Fix mouldings, snap a marker into each one. Then position the second panel and press firmly. The markers will leave indents in the panel surface, which can be used as guides for drilling pilot holes for the Buttons. Remove the markers, which can be re-used to mark out the next panel.

Suggested layout

As an approximate guide, we suggest that Button-fix centers are no greater than 24" apart and no closer than 1.4" to the edge of the panel.

Always remember to allow at least 0.6" clearance for the removable panel to disengage.

Accessories

Button Marker



Item# 171-002-3

Fix Marker Tool



Item# 171-008-1

Safety Cord



Item# vv

Self Adhesive Fix Pad






Item# 171-017-2

Router Multijig




Item# 171-019-1



Feature of the Fix	Type 1	Type 1 Flush	Type 1 Binded	Type 1 metal	Type 2
Material	Nylon PA6	Nylon PA6	ABS	Zinc Allow	Nylon PA6
Connects face-to-face	✓	✓	✓	✓	
Connects at 90 Deg					✓
Drop down or sideways engagement	✓	✓	✓	✓	
Push-one engagement					✓
For use on fire- retardant panels				✓	
Surface mounted	✓	✓	✓	✓	✓
Semi-rebated/recessed	✓		✓	✓	
Fully rebated/recessed		✓			
Attached with screws	✓	✓		✓	✓
Bonded			✓		
Minimum panel thickness	3/8"	3/4"	N/A	3/8"	3/8"

99% of Orders Ship Same Day!

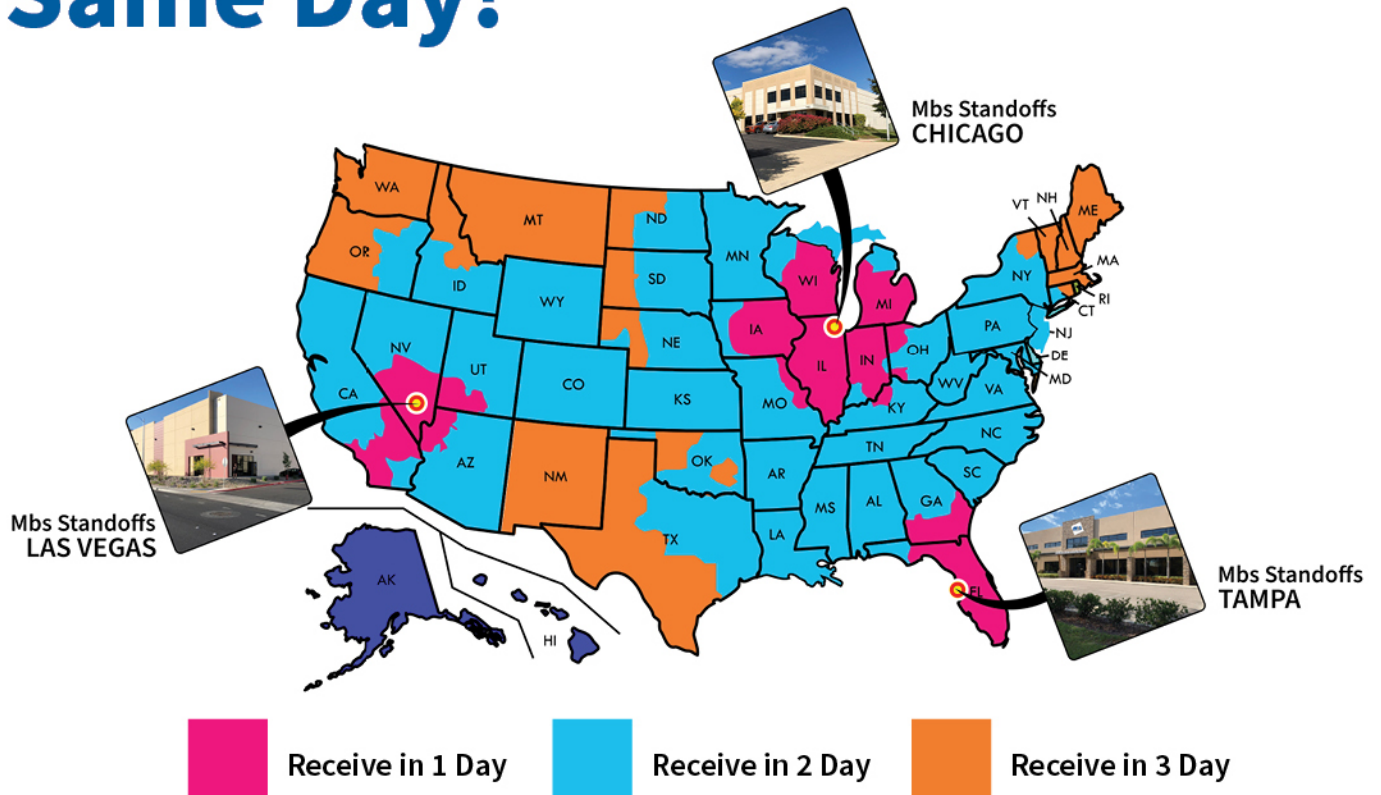

Free Daily Pickup and 1 or 2 Days Ground Shipping to Most of the States

Daily Pick-ups

- We have a daily pick-up, so that all of our customers can take advantage of same day shipping.
- **Blind Shipping & Drop Shipping Available Upon Request (Fees may apply)**
- Don't forget we can always ship on your account.
- If you are local, you can pick up your order within 30 minutes of placing your order.



Monday–Thursday up to 6:30pm,
Friday up to 5:30pm

Monday–Thursday up to: 6:30pm,
Friday up to 5:30pm



Shipping to Canada with Fedex, UPS & USPS, and anywhere in the world with DHL




BULK QUANTITY? PERSONALIZED DESIGNS? SPECIAL REQUESTS?

Contact us today!

Our Signage Hardware Experts Will be Delighted To Assist You!

1 (813) 938-6025 • sales@mbs-standoffs.com

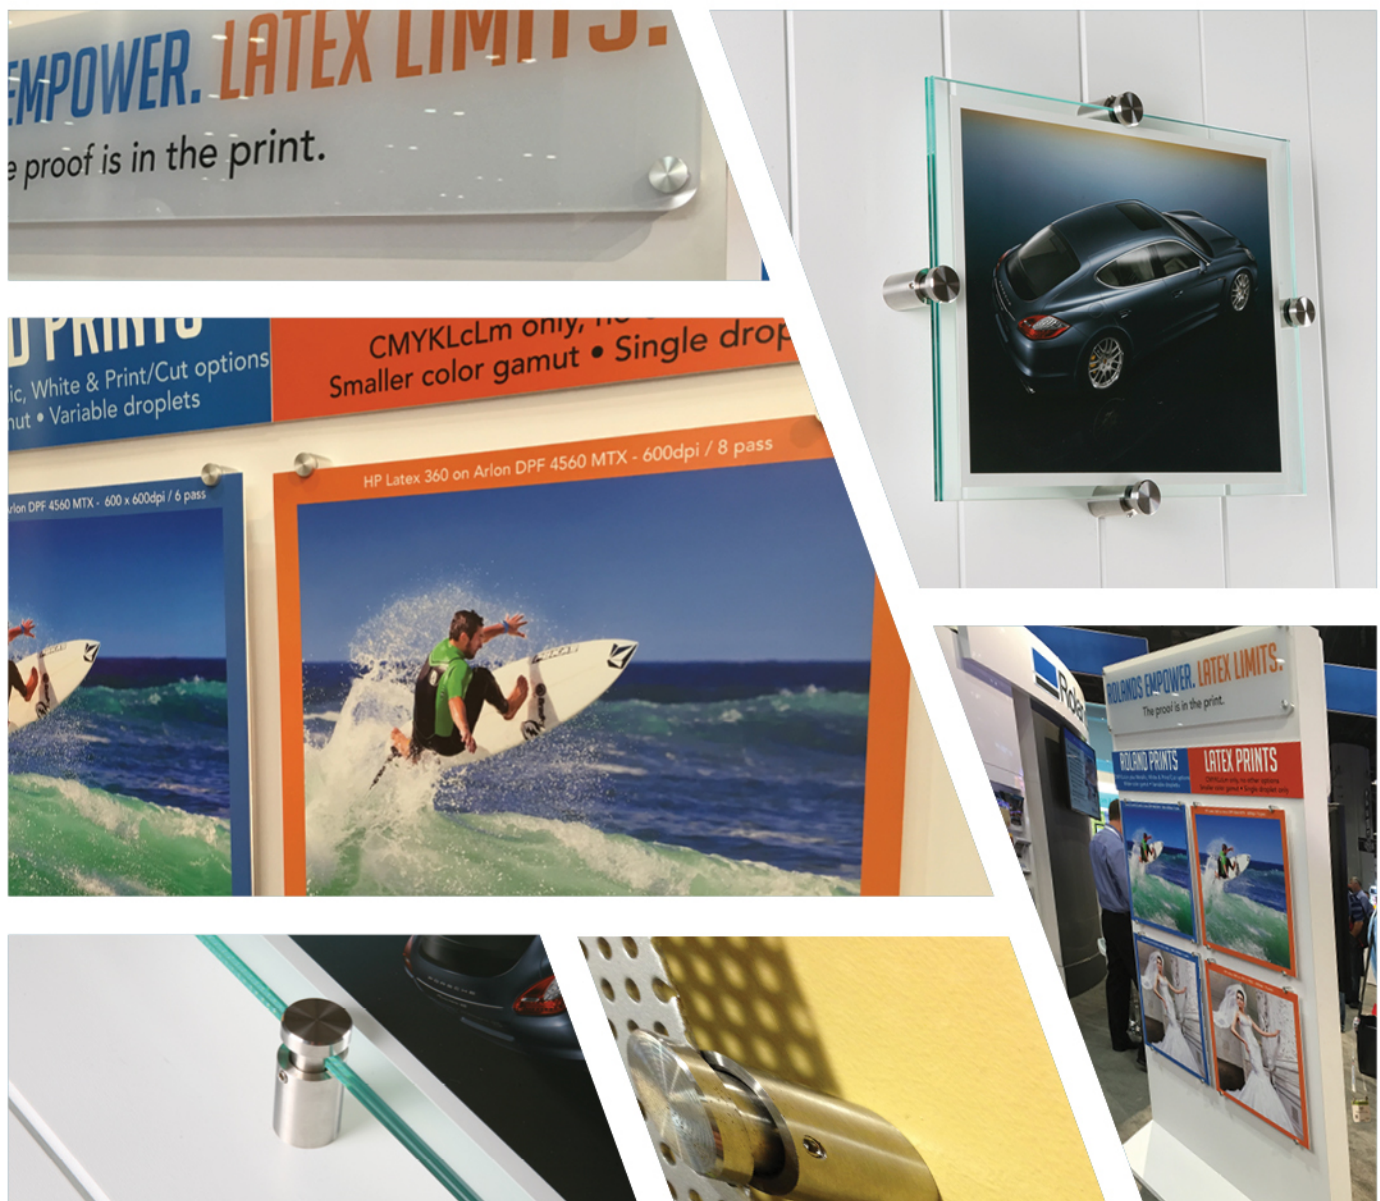




PROJECTING SYSTEMS




p74



p77

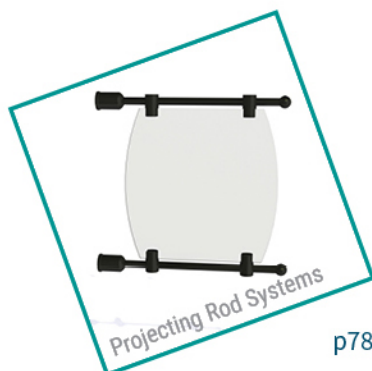



p78

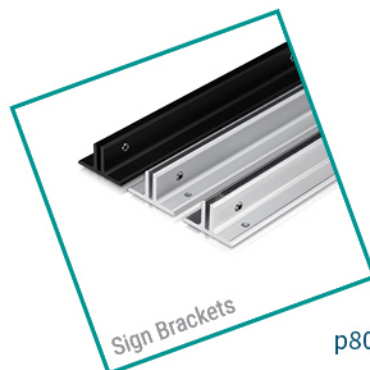

p80

Projecting Wall Mount

- 2 Different diameters 7/8" and 1"
- Only 1" height
- Material accepted 3/16" to 1/2"
- No material drilling needed
- Can be used with washer reinforcement

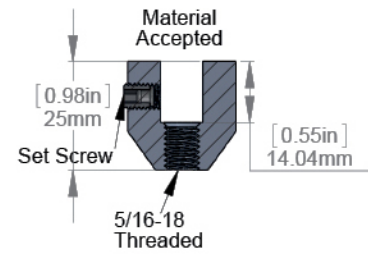

7/8" & 1" Diameter (22 & 25.4 mm)

Diameter	Thickness Material Accepted	Aluminum						Stainless Steel	
		Dull Anodized	Shiny Anodized	Black Anodized	Gold Anodized	Bronze Anodized	Titanium Anodized	Brushed	Polished
7/8" (22 mm)	3/16" (4.76 mm)	PS125A	PS125AS	PS125B	PS125G	PS125AB	PS125T	PS125S	PS125P*
7/8" (22 mm)	1/4" (6.35 mm)	PS250A	PS250AS	PS250B	PS250G	PS250AB	PS250T	PS250S	PS250P*
7/8" (22 mm)	3/8" (9.52 mm)	PS375A	PS375AS	PS375B	PS375G	PS375AB	PS375T	PS375S	PS375P*
1" (25.4 mm)	1/2" (12.7 mm)	PS500A	PS500AS	PS500B	PS500G	PS500AB	PS500T	PS500S	PS500P*


* Special Fabrication MOQ: 100

Washers Reinforcement

Diameter	Aluminum						Stainless Steel	
	Dull Anodized	Shiny Anodized	Black Anodized	Gold Anodized	Bronze Anodized	Titanium Anodized	Brushed	Polished
1" (25 mm)	PSW100A	PSW100AS	PSW100B	PSW100G	PSW100AB	PSW100T	PSW100S	PSW100P*

- 2 Different diameters 7/8" and 1"
- Only 1 3/4" height
- Material accepted 3/16" to 1/2"
- Material drilling 3/16"

7/8" & 1" Diameter (22 & 25.4 mm)



Diameter	Thickness Material Accepted	Aluminum						Stainless Steel	
		Dull Anodized	Shiny Anodized	Black Anodized	Gold Anodized	Bronze Anodized	Titanium Anodized	Brushed	Polished
7/8" (22 mm)	1/4" (6.35 mm)	PGS250A	PGS250AS	PGS250B	PGS250G	PGS250AB	PGS250T	PGS250S	PGS250P*
7/8" (22 mm)	3/8" (9.52 mm)	PGS375A	PGS375AS	PGS375B	PGS375G	PGS375AB	PGS375T	PGS375S	PGS375P*
7/8" (22 mm)	1/2" (12.7 mm)	PGS500A	PGS500AS	PGS500B	PGS500G	PGS500AB	PGS500T	PGS500S	PGS500P*
1" (25.4 mm)	3/4" (19.05 mm)	PGS750A	PGS750AS	PGS750B	PGS750G	PGS750AB	PGS750T	PGS750S	PGS750P*


* Special Fabrication MOQ: 100

Use for drywall: HB5/16-100 hanger bolt and anchor ANC5, ANC5Z or Set ANC5ZS

Projecting Wall Mount

For Indoor Use Only


- 1" Diameter
- Only 1 1/8" height
- Material accepted 3/8"
- No material drilling needed

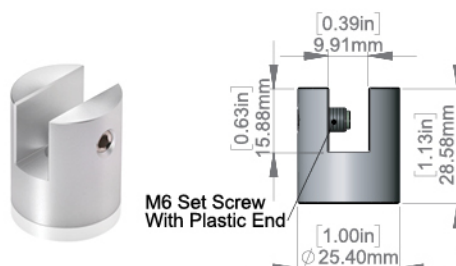


1" Diameter (25 mm)

Diameter	Thickness Material Accepted	Aluminum						Stainless Steel	
3/4" (19mm)	1/4" (6.35mm)	HM075-100A	HM075-100AS	HM075-100B	HM075-100G	HM075-100AB	HM075-100T	HM075-100S	HM075-100P*
1" (25 mm)	3/8" (9.52 mm)	HM5010A	HM5010AS	HM5010B	HM5010G	HM5010AB	HM5010T	HM5010S	HM5010P*



Diameter	Thread	Thickness Material Accepted	Aluminum	
1 1/4" (32 mm)	5/16-18	3/8" (9.52 mm)	SM38CH	SM38SC



- 7/8" Diameter
- Only 1 1/8" height
- Material accepted 3/8"
- No material drilling needed



- SM38CH
- SM38SC



7/8" Diameter (22 mm)

Diameter	Thickness Material Accepted	Aluminum						Stainless Steel	
7/8" (22 mm)	1/4" to 3/8"	PS078-100A	PS078-100AS	PS078-100B	PS078-100G	PS078-100AB	PS078-100T	PS078-100SS	PS078-100SP*

Stainless Steel Projecting Wall Mount

For Indoor Use Only

Designed from high quality stainless steel

Designed for flat material signs


Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted: 1/4" (6 mm)

3/4" (20 mm) Diameter

Mounting Diameter	Item #
3/8" (10 mm)	100.322

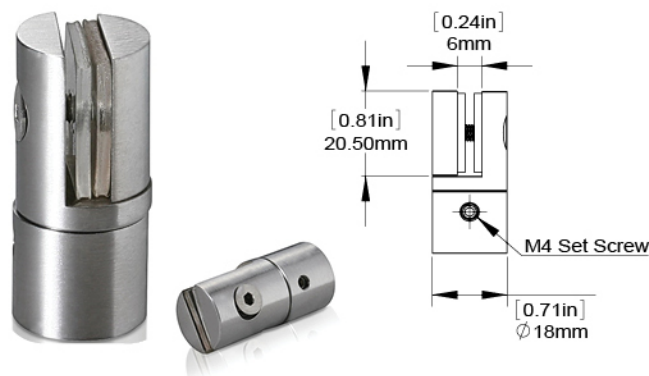


3/4" (20 mm) Diameter

Mounting Diameter	Holds	Item #
3/8" (10 mm)	3/8" (10 mm)	100.206

Use for drywall: screw 2216 and anchor ANC6, ANC6Z


Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted: 3/8" (10 mm)

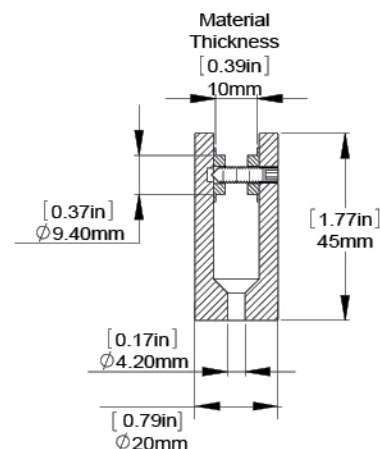

INSTALLATION GUIDE!

1. First, mark where you will mount your standoffs, then drill any holes necessary and insert your anchors.
2. Next, loosen the Set Screw from the Projecting Wall mount and screw the Projecting Wall Mount securely into your anchor.
3. When your Projecting Wall Mounts are attached to the wall, place your material in the Projecting Wall Mount and tighten down the set screw.

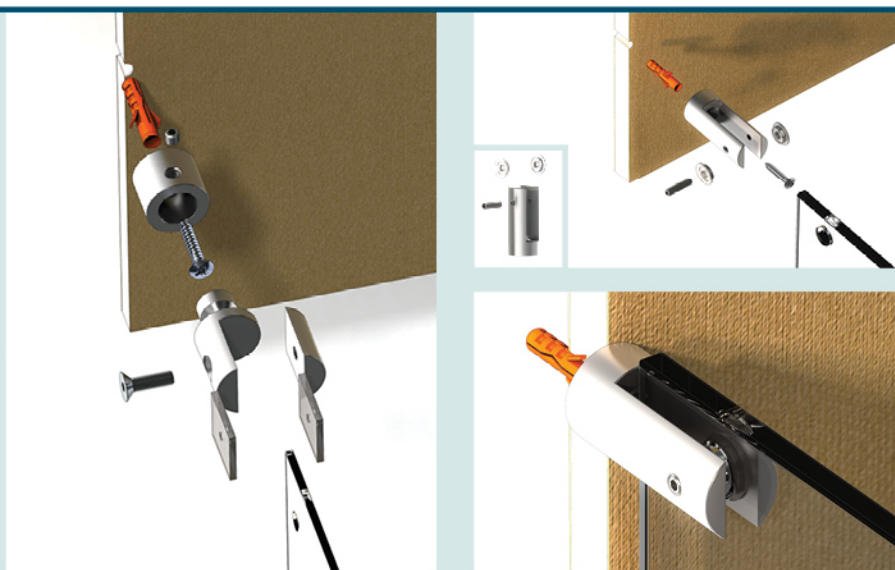

Stainless Steel Flag Sign

For Indoor Use Only

- Flag sign includes:
- 2 glasses 7 1/16" (180 mm) × 7 1/16" (180 mm) × 3/16" (4 mm)
- High grade stainless steel round bar
- 2 point wall attachment
- Art and hardware not included

Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Item # 160.304

Insert sheet: clear, fuzzy, white

Item # 160.304SHT



All packages are individually inspected multiple times by our certified shipping representatives to ensure your order is nothing less than perfect


1-813-938-6025
sales@mbs-standoffs.com

COMMITTED TO QUALITY



Stainless Steel Projecting

For Indoor Use Only

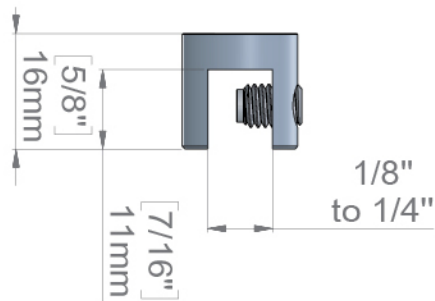

Diameter	Material Thick. Accepted	Comments	Aluminum						Stainless Steel	
5/8"	1/8" to 1/4"	Set of 2	WMC058A	WMC058AS	WMC058B	WMC058G	WMC058AB	WMC058T	WMC058SS	WMC058SP

Stainless Steel Projecting Wall Mount Rounded


- Wall mounted side standoffs
- Designed from high quality stainless steel
- Designed for flat material signs

Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted: up to 5/16" (8 mm)

Thickness Accepted	Item #
up to 5/16"	100.154

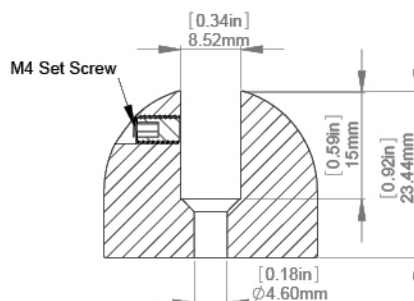

- Set of 2 Wall mounted side standoffs
- Designed from high quality stainless steel
- Designed for flat material signs

Use for drywall: screw 2216 and anchor ANC6, ANC6Z

Use for concrete: screw 2216 and anchor ANC2

Thickness of material accepted: 2 @ 3/16" or 1 @ 5/16"

Thickness Accepted	Item #
3/16" to 5/16"	100.320



INSTALLATION GUIDE!




Tools required M4 Hex key, Phillips Screwdriver


Material Connector

For Indoor Use Only

- Designed from high quality stainless steel and aluminum
- Designed for flat material signs
- 3 Finishes
- 1/4" To 1/2" thick, material accepted



MCS038



MC038

3/8" (10 mm) Diameter

Diameter	Mounting Diameter	Material Thick. Accepted	Head	Aluminum		Stainless Steel
						
3/8" (10 mm)	1/4" (6 mm)	5/16" to 1/2"	Flat 1/16" Thick.	MC038A	MC038B	MC038S
		1/4" to 3/8"	Flat 1/4" Thick.	MCS38A	MCS38B	MCS38S

1/2" (12 mm) Diameter Double Sided Stainless Steel Screw

Mounting Diameter	Head	Item #
3/8" (10 mm)	Flat	100.020

Thickness of material accepted: 2 @ 3/16" or 1 @ 5/16"
(2 @ 4 mm or 8 mm)



FOLLOW US ON YOUTUBE!

- Product Videos
- Instruction Guides
- Testimonials
- Ideas and more...



Projecting Rod Systems 3/8" Diameter

For Indoor Use Only



Clear Anodized Finish



Matte Black Anodized Finish



- 3/8" Diameter Arm (2x)
- 2 Point wall attachment
- 4 Forks for material up to 5/16" Thick.
- Art, Acrylic not included

Use for drywall:

Screw 2216 and anchor ANC6, ANC6Z

Use for concrete:

Screw 2216 and anchor ANC2

Optional:

Set of (2) 3 hole Mounting Plate

Set of (2) End balls

Description	Diameter	Mounting Diameter	Material Thick. Accepted	Material Width Accepted	Aluminum		Stainless Steel
							
Set Of 2 Projection Rod Sold Without Acrylic	3/8" (10 mm)	1" (25 mm)	Up to 5/16"	Up to 8"	RPS8A	RPS8MB	RPS8SS
				Up to 12"	RPS12A	RPS12MB	RPS12SS
				Up to 16"	RPS16A	RPS16MB	RPS16SS
				Up to 20"	RPS20A	RPS20MB	RPS20SS
				Up to 24"	RPS24A	RPS24MB	RPS24SS
(2) Mounting Plate W/3 holes	1 15/16"	1 15/16"	N/A	N/A	RPSWMA	RPSWMMB	RPSWMSS
(2) End ball for Rod	5/16"	3/8"	N/A	N/A	ROD310-REA	ROD310-REMB	ROD310-RESS





Set of (2)
3 hole Mounting Plates



Set of (2) End balls

Projecting Rod Systems 3/8" Diameter

For Indoor Use Only

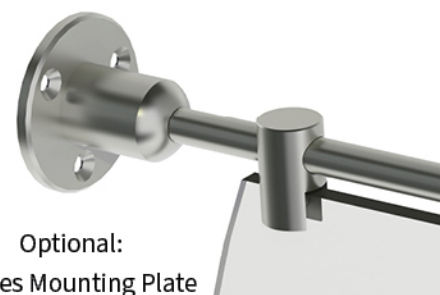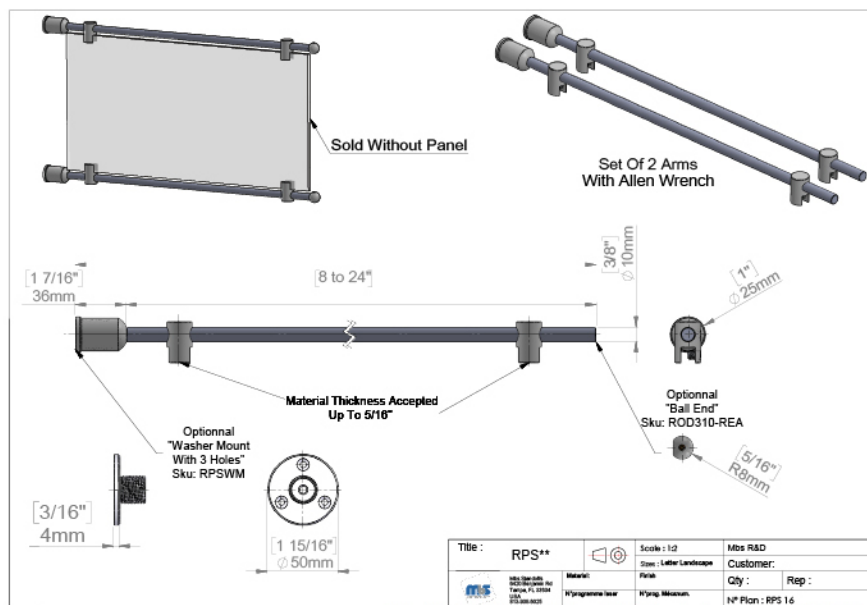


INSTALLATION GUIDE!

1. First, mark where you will mount your standoffs, then drill any holes necessary and insert your anchors.
2. Next, loosen the set screw from the Projecting Wall mount and screw the Projecting Wall Mount securely into your anchor.
3. When your Projecting Wall Mounts are attached to the wall, place your material in the Projecting Wall Mount and tighten down the set screw.

Aluminum Sign Brackets

A Perfect Wayfinding Solution

Our aluminum sign brackets are constructed of high-quality materials and provide the sturdy support you need to secure your project. We have a variety of lengths and finishes that can hold either 1/8" or 1/4" material thickness. You can mount the sign brackets to most surfaces to help point people in the right direction.

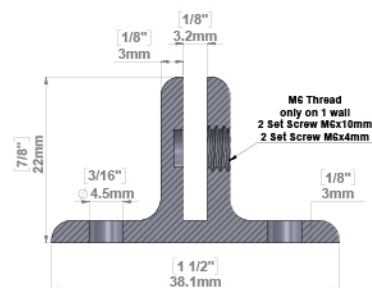


For 1/8" Material Thickness




Length	Material Thickness	Aluminum Clear	Aluminum Shiny	Matte Black	Gold
2"	1/8"	ASB18-2A	ASB18-2AS	ASB18-2MB	ASB18-2G
4"	1/8"	ASB18-4A	ASB18-4AS	ASB18-4MB	ASB18-4G
6"	1/8"	ASB18-6A	ASB18-6AS	ASB18-6MB	ASB18-6G
8"	1/8"	ASB18-8A	ASB18-8AS	ASB18-8MB	ASB18-8G
10"	1/8"	ASB18-10A	ASB18-10AS	ASB18-10MB	ASB18-10G
12"	1/8"	ASB18-12A	ASB18-12AS	ASB18-12MB	ASB18-12G
18"	1/8"	ASB18-18A	ASB18-18AS	ASB18-18MB	ASB18-18G
24"	1/8"	ASB18-24A	ASB18-24AS	ASB18-24MB	ASB18-24G
36"	1/8"	ASB18-36A	ASB18-36AS	ASB18-36MB	ASB18-36G
48"	1/8"	ASB18-48A	ASB18-48AS	ASB18-48MB	ASB18-48G
72"	1/8"	ASB18-72A	ASB18-72AS	ASB18-72MB	ASB18-72G
96"	1/8"	ASB18-96A	ASB18-96AS	ASB18-96MB	ASB18-96G

Aluminum Sign Brackets

A Perfect Wayfinding Solution

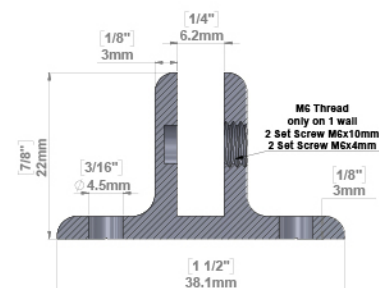

For 1/4" Material thickness

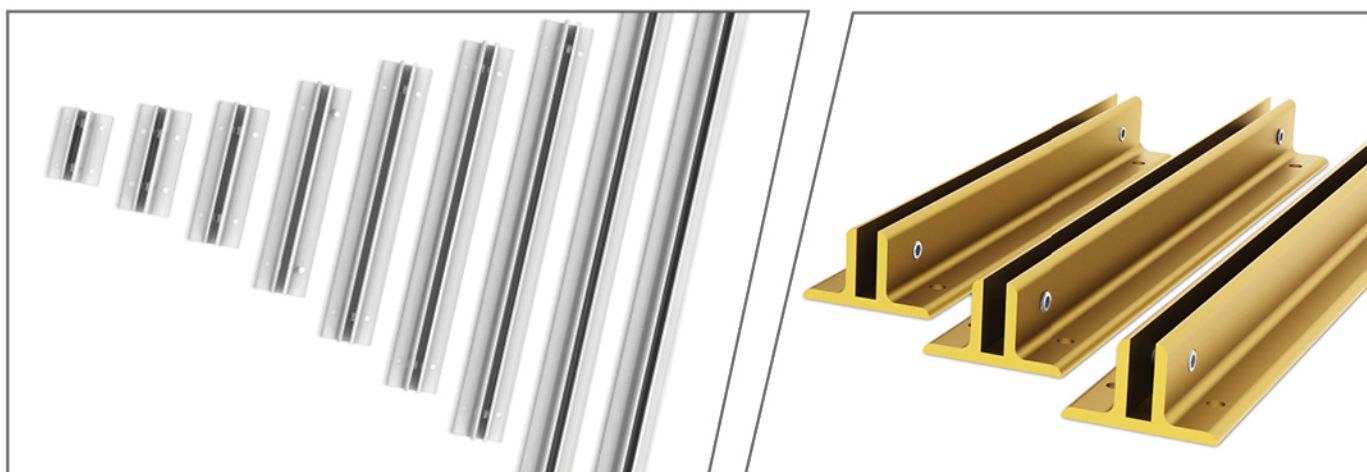

Length	Material Thickness	Aluminum Clear	Aluminum Shiny	Matte Black	Gold
2"	1/4"	ASB14-2A	ASB14-2AS	ASB14-2MB	ASB14-2G
4"	1/4"	ASB14-4A	ASB14-4AS	ASB14-4MB	ASB14-4G
6"	1/4"	ASB14-6A	ASB14-6AS	ASB14-6MB	ASB14-6G
8"	1/4"	ASB14-8A	ASB14-8AS	ASB14-8MB	ASB14-8G
10"	1/4"	ASB14-10A	ASB14-10AS	ASB14-10MB	ASB14-10G
12"	1/4"	ASB14-12A	ASB14-12AS	ASB14-12MB	ASB14-12G
18"	1/4"	ASB14-18A	ASB14-18AS	ASB14-18MB	ASB14-18G
24"	1/4"	ASB14-24A	ASB14-24AS	ASB14-24MB	ASB14-24G
36"	1/4"	ASB14-36A	ASB14-36AS	ASB14-36MB	ASB14-36G
48"	1/4"	ASB14-48A	ASB14-48AS	ASB14-48MB	ASB14-48G
72"	1/4"	ASB14-72A	ASB14-72AS	ASB14-72MB	ASB14-72G
96"	1/4"	ASB14-96A	ASB14-96AS	ASB14-96MB	ASB14-96G

Solid Steel Powder Coated Double Panel Stand

Why limit yourself to walls and ceilings? Use this beautifully designed Standing Sign Base to create an incredible and portable sign display!

Maximum panel thickness accepted: 3/4"

Sizes: 14" x 14" x 4"

Weight: 3.6 lbs

Item #: PS370




**NEW
PRODUCT**




3 WAYS TO ENJOY IT!



Highest 6' x 2'



Widest 4' x 4'



Horizontally
8' x 3'

*Sold
Without
Panel



INSTALLATION

1. Unscrew the caps from the base and remove the steel retaining panel. Place your material against the sign base and thread your screws through your material.
2. Place the steel retaining panel on the other side of your material, slide the screws through, and tighten the caps until snug.
3. Take a step back and admire your gorgeous display!



SUSPENDED SYSTEMS



p88



p89



p90



p92



p93




p95

Suspended System

**Huge selection
of kits on our website
mbs-standoffs.com**

- MBS offers a wide variety of high quality suspended systems that perform better than any other
- Increased ceiling load, and reduced installation time
- There is an abundance of kits available – Sky's the limits!
- All of our suspended systems have installation guides along with updated YouTube videos to help you along the way
- We also have certified Sales Reps eager to help

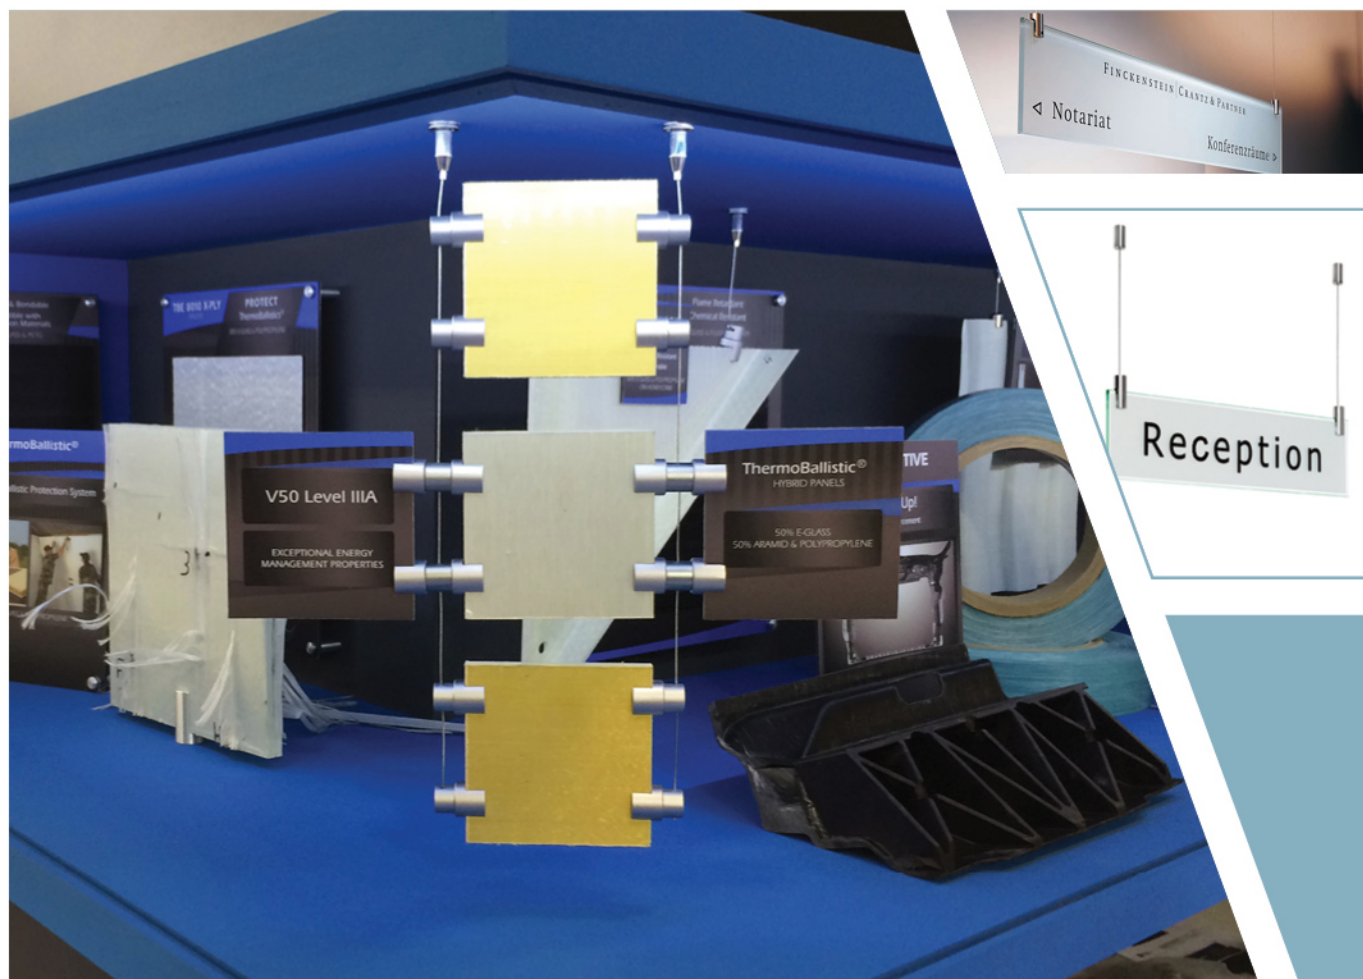


Suspended System

Technical Information

- Ceiling mounted glass holder
- Designed from high quality material
- Stainless steel and aluminum for hanging signs
- Socket head cap screw to attach cable
- Maximum width between each cable is 24"

Use for drywall: screw 2208 and anchor ANC5, ANC5Z


Use for concrete: screw 2208 and anchor ANC1

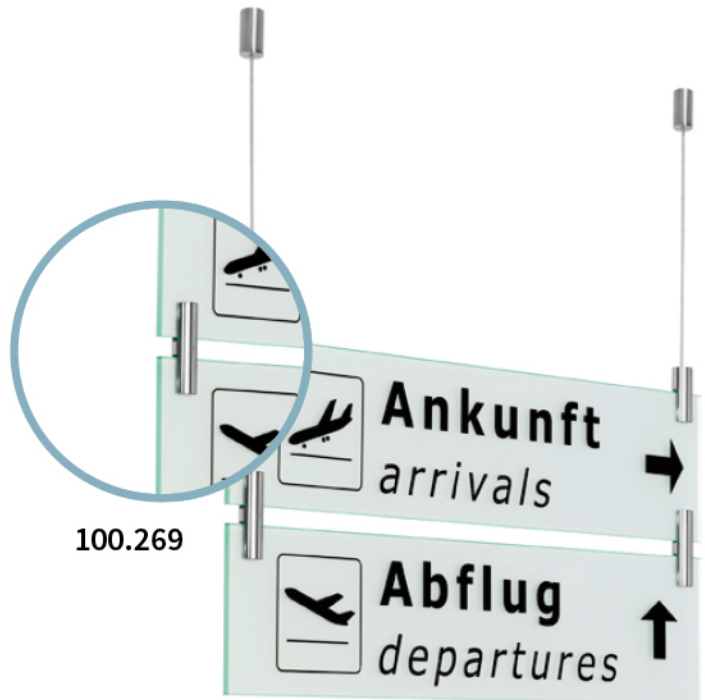

Suspended Kits

2 TClamps • 2 Cables • 2 Hooks

Cable Type	Diameter	48"	72"	96"	120"
Stainless Steel Cable	1/16"	SK1S-48	SK1S-72	SK1S-96	SK1S-120
Nylon Cable	1/16"	SK1N-48	SK1N-72	SK1N-96	SK1N-120

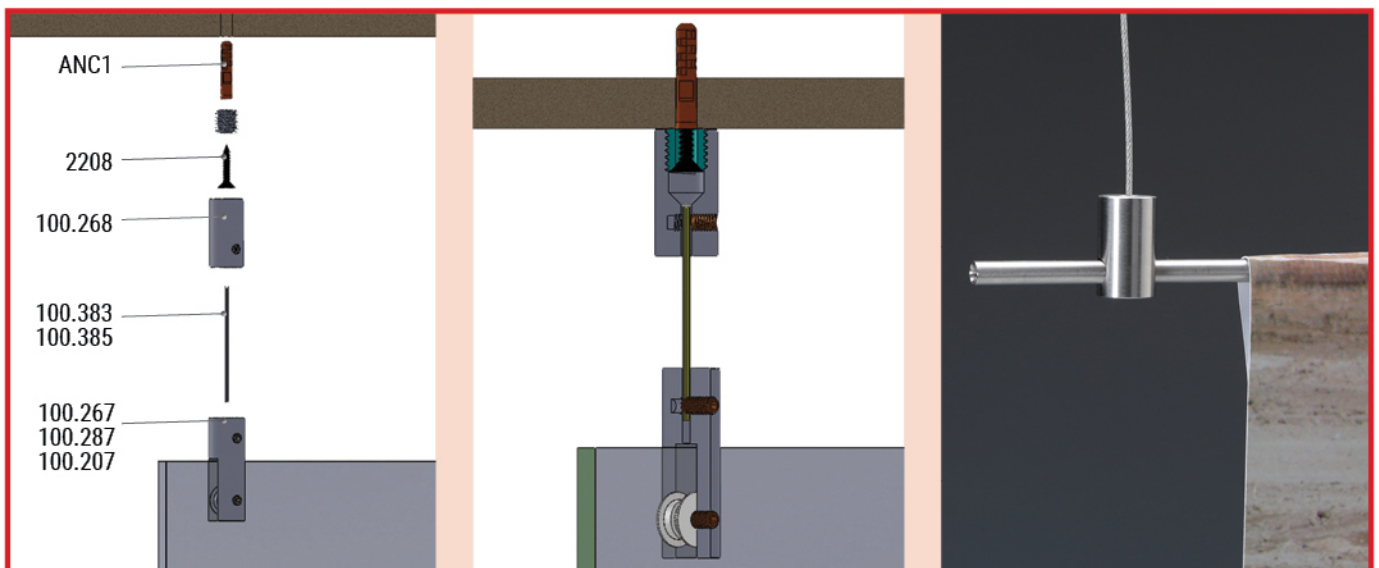

Stainless Steel Suspended System

Ceiling & Material Mounts



100.268



100.267; 100.287
100.207



100.269

Finish	Diameter	Mounting Diameter	Cable Diameter	Thickness of Material Accepted	Item #
Satin Brushed	5/8" (16 mm)	3/8" (9.40 mm)	1/16"	N/A	100.268
			(1.50 mm)	1/4" (6 mm)	100.267
			to 1/8"	5/16" (8 mm)	100.287
			(2 mm)	3/8" (10 mm)	100.207
			N/A	1/4" (6 mm)	100.269

See Screw and Anchor page 79

Cable



Stainless Steel Cable	Item #
Stainless Steel Cable Diameter: 1/16" (2 mm) Length 9' (3 m) Maximum weight supported: 55 lbs (25 kg)	100.383
Galvanized Steel Cable Diameter 1/16" (2 mm) Length 6'	100.390
Stainless Steel Cable Diameter: 1/16" (2 mm) Length 16' (5 m) Maximum weight supported: 55 lbs (25 kg)	100.385
Galvanized Steel Cable Diameter 1/16" (2 mm) Length 16' 4" with attached head	100.391
Galvanized Steel Cable Diameter 1/16" (2 mm) Length 10,500ft	GC116-43*
Looped Stainless Steel Cable - 120"	SHC120
Looped Nylon Cable - 120"	NHC120

*This is a Special Order Item


Accessories




Finish	Item #
Steel Painted White	Tclamp
	Tclamp1
Clear Acrylic	Tclamp2

Use Tclamp to attach to drop ceiling. Then flip hanging fork upside down to attach to clamp.

5/8" (16 mm) Diameter "Hanging Fork"

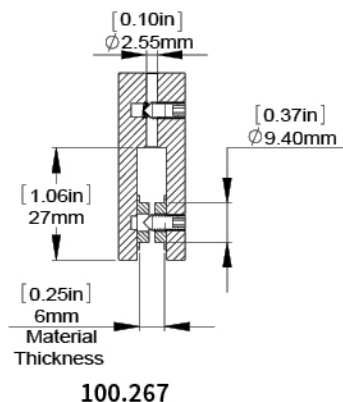

5/8" (16 mm) Diameter "Hanging Fork Link"

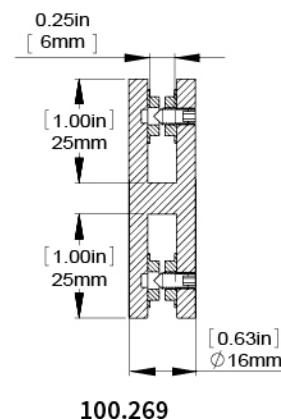

Item #
CABLECUTTER

Aluminum Suspended System

Ceiling Mounts

Diameter	Cable Diameter				
5/8" (16 mm)	1/16" (1.5 mm)	Clear Anodized	Shiny Anodized	Black Anodized	Gold Anodized
		100.268A	100.268AS	100.268B	100.268G



Material Mounts

Diameter	Cable Diameter	Thickness Accepted				
5/8" (16 mm)	1/16" (1.5 mm)	1/4" (6.50 mm)	Clear Anodized	Shiny Anodized	Black Anodized	Gold Anodized
		5/16" (9.70 mm)	100.267A	100.267AS	100.267B	100.267G
			100.287A	100.287AS	100.287B	100.287G





Suspended Cable Kit

For Signage, Display, Wayfinding, etc...

Suspended Kits

Kit Includes: 2 ceiling mounts, 2 × 2' cable and 2 forks. Use for drywall: screw 2208 and anchor ANC5, ANC5Z
Use for concrete: screw 2208 and anchor ANC1. Thickness of material accepted: 1/4" (7 mm)

Suspended Cable Kit		Item #
	Aluminum Anodized Finish Suspended Kit (2 Pieces) Hang to 1/4" Material	SUSKIT2A
	Aluminum Matte Black Finish Suspended Kit (2 Pieces) Hang to 1/4" Material	SUSKIT2MB
	Brass Polished Finish Suspended Kit (2 Pieces) Hang 1/4" Material	SUSKIT1



Automatic cable mechanism

Aluminum Suspended Kit

Kit Includes: 1 ceiling mount, 6'6" cable and 1 forks. Use for drywall: Screw 2216 and anchor ANC6, ANC6Z
Use for concrete: included

Description		Item #
	1 Ceiling Suspended Cable Kit Heavy Duty - Clear Anodized Aluminum Thickness: 1/8" to 5/16" Cable: 1/16" × 6'6"	ACG1902HD
	1 Ceiling Suspended Cable Kit Heavy Duty - Clear Anodized Aluminum Thicknes: 1/8" to 1/2" Cable: 1/8" × 6'6"	ACG31902



Suspended Cable Kit


Single Suspended – For Signage, Display, etc...

Aluminum

Panel Thickness: minimum 1/8" (3 mm),
maximum 5/16" (8 mm)

Aluminum Suspended Kit Includes:

- 1 ceiling mount
- 1 cable long 6'6", diameter 1/16" (1.50 mm)
- 1 panel mount holder
- Mounting hardware included

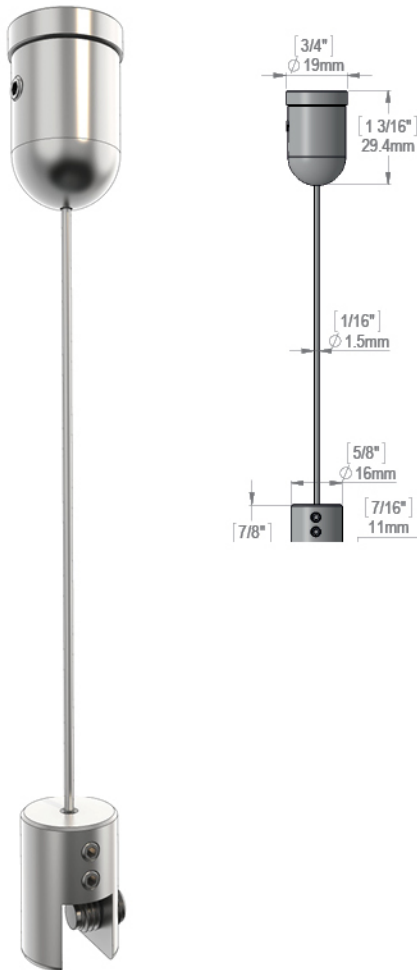

Aluminum Clear Anodized


ACG1902

Stainless Steel

Panel Thickness: minimum 1/8" (3 mm),
maximum 5/16" (8 mm)

Stainless Steel Suspended Kit Includes:

- 1 ceiling mount
- 1 cable long 6'6", diameter 1/16" (1.50 mm)
- 1 panel mount holder
- Mounting hardware not included

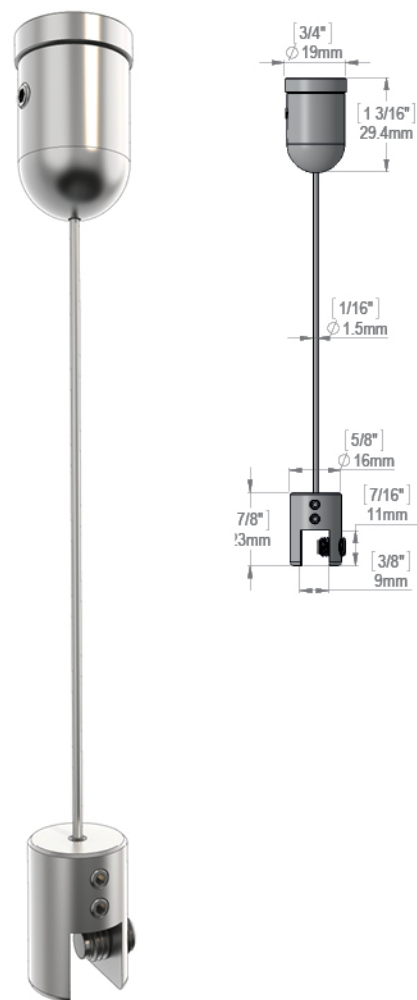

Satin Stainless Steel

SCG1902

Suspended Rod Kits


For Signage, Display, etc...

Aluminum

Panel Thickness: minimum 1/8" (3 mm), maximum 5/16" (8 mm)

Aluminum Suspended Kit Includes:

- 1 ceiling mount, 1 aluminum rod diameter: 1/4" (6 mm)
- 1 panel mount holder
- ARG1902-1 L: 3' (0.91 m)
- ARG1902-2 L: 4'11" (1.5 m)
- ARG1902-3 L: 6' (2 m)
- ARG1902-4 L: 9' (2.5 m)
- Mounting hardware included

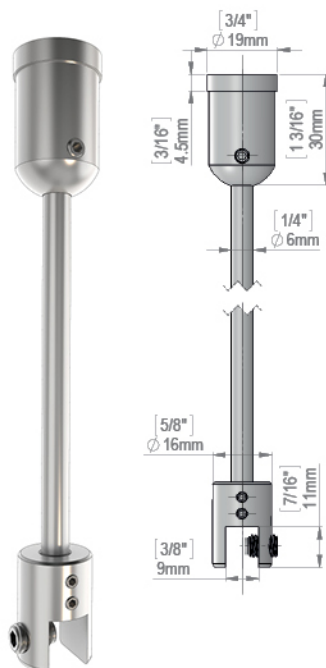

Aluminum Clear Anodized

ARG1902-**




Watch on our website how to install

Stainless Steel

Panel Thickness: minimum 1/8" (3 mm), maximum 5/16" (8 mm)

Stainless Steel Suspended Kit Includes:

- 1 ceiling mount, 1 SS rod diameter: 1/4" (6 mm)
- 1 panel mount holder
- SRG1902-1 L: 3' (0.91 m)
- SRG1902-2 L: 4'11" (1.5 m)
- SRG1902-3 L: 6' (2 m)
- SRG1902-4 L: 9' (2.5 m)
- Mounting hardware not included

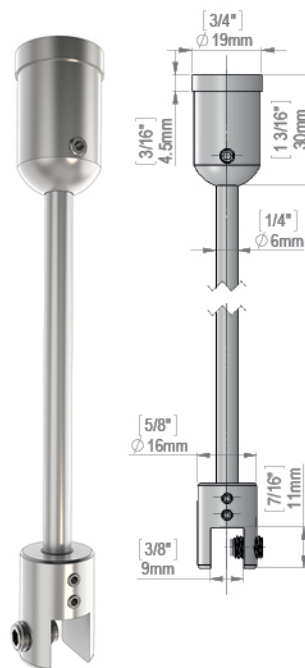

Satin Stainless Steel

SRG1902-**



Watch on our website how to install

Accessories



Nut and Ceiling Support For Ceiling Rod Suspended Aluminum Kit

ARG1902EP



Nut Support (Threaded M4) For Ceiling Rod Suspended Aluminum Kit

ARG1902N

Cable & Rod Banner Hanger

Ceiling Mounts



100.268



100.268A / 100.268B / 100.268G



110.000



110.100



100.383 / 100.385 / 100.391

Finish	Description	Diameter	Cable Diameter	Item #	
Satin Brushed	Tightening Set Screw	5/8" (16 mm)	1/8" (2 mm)	100.268	
Clear Anodized				100.268A	
Nickel	Self-Gripping	110.000			
Nickel	Self-Gripping for Aluminum Profile	110.100			
Stainless Steel Cable Diameter: 1/16" (2 mm) Length 9' (3 m) Maximum weight supported: 55 lbs (25 kg)				100.383	
Stainless Steel Cable Diameter: 1/16" (2 mm) Length 16'4" (5 m) Maximum weight supported: 55 lbs (25 kg)				100.385	
Galvanized Steel Cable Diamger: 1/16" (2mm) Lenght 16'4" (5m) Maximum weight supported: 55 lbs (25kg)				100.391	

Banner Mounts



Stainless Steel
SR063



Aluminum
SR063A

Description	Diameter	Cable Diameter	Aluminum			Stainless Steel
			Clear Anodized	Black Anodized	Titanium Anodized	Satin Brushed
Rod Cable/Rod Connector	5/8" (16 mm)	1/16" (1.5 mm)	SR063A	SR063B	SR063T	SR063
36" Rod Threaded Each end	1/4" (6 mm)	1/16" (1.5 mm)	ROD3A	ROD3B	ROD3T	ROD3

Rod Banner Hanger

For Signage, Display, Poster, Graphic, etc...

- Easy to use design for quick installation every time
- Contemporary styling
- A variety of applications



Description		Diameter	Aluminum Clear Anodized	Stainless Steel Satin Brushed
	Rod Ceiling Mount	5/8" (15 mm)	100.363	100.363-R 100.363-SR
	Wall Mount	11/16" (17 mm)	ASA1724	SSA1724
	Rod	1/4" (6 mm)	ROD3A	ROD3
	Junction Part	7/8"	SA1600A	-
	36" Pipe	5/8"	PIPE-16A	-




Hooks for Stainless Steel and Nylon Cable

Brass



H103-NK



BEST SELLING

Z-CLIP SAMPLE BOX WITH INSTRUCTION GUIDE



Description	Item #
ZCP Sample Box with 2 Pieces of ZCP1, ZCP2, ZCP3; Instuction Guide and Description	ZCPSampleBox





Z-CLIP RAILS

DON'T MISS OUR YOUTUBE VIDEO

Mbs Standoffs "ZCP1" Clip



The easiest way to hang




AMERICA'S # 1 CHOICE FOR STANDOFFS

Z-Clip Panel Mount



The Z-CLIP system is a fast, easy, and a cost effective method to lock in place any kind of wall panel, which includes acoustical panels, partitions, cabinets, signage, artwork, etc. The “Z” shaped clips wedge together locking panels in place which allows for costs to be cut by 50% as well as installation time. The Z-CLIP system provides ample access to easy mounting and removal of panels for any changes or replacements. Z-Clips are discreet and allow for a pre-finished look without the time consuming face nailing and costly on-the-job finishing.

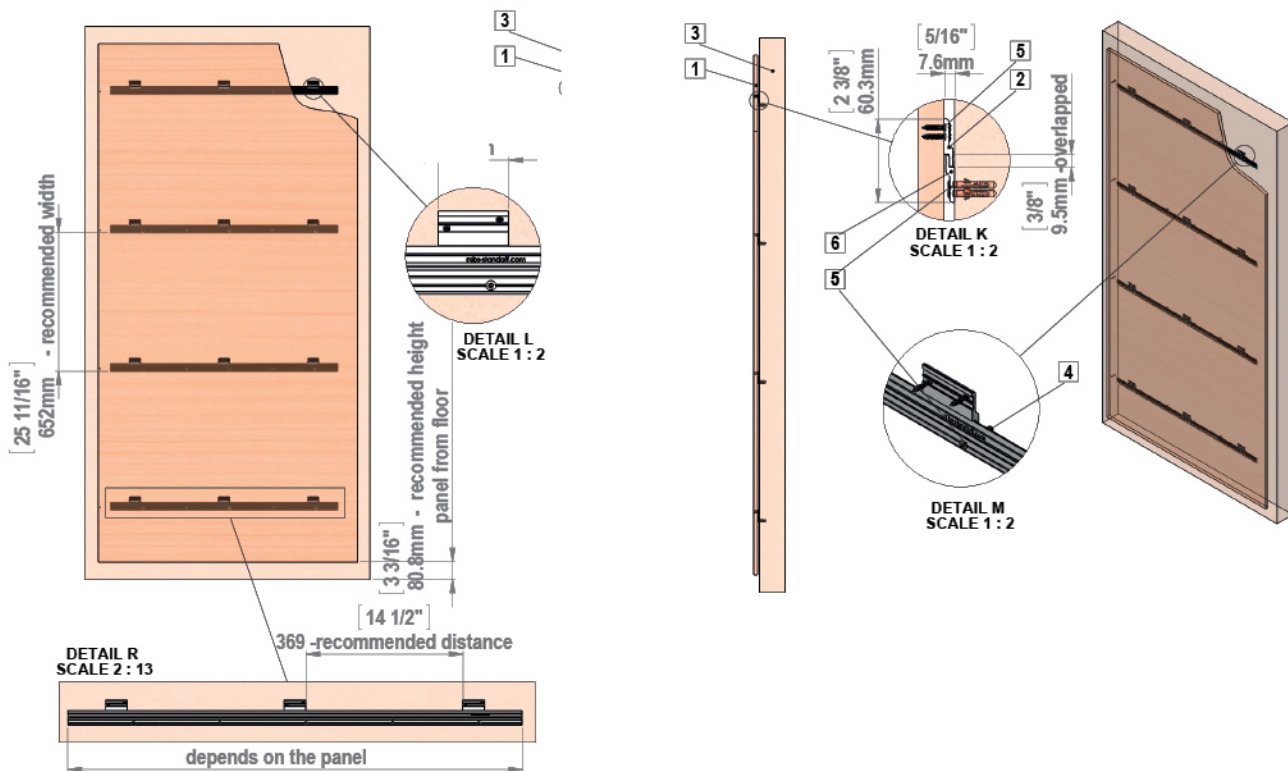

For more information and instruction guides, go to: mbs-standoffs.com/z-clip-panel.html


Z-Clip Panel Mount

Ideal for hanging wall panels, partitions, and signs – All pre drilled for easy installation

Medium to Heavy duty application

Width	Item #
2" (51 mm)	ZCP1
36" (914 mm)	ZCP1-3
72" (1829 mm)	ZCP1-6

Lift 3/8"


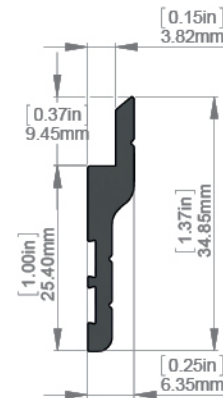


Scale: 1/1

Light to Medium duty application

Width	Item #
1 1/2" (51 mm)	ZCP2
36" (914 mm)	ZCP2-3
72" (1829 mm)	ZCP2-6

Lift 5/8"

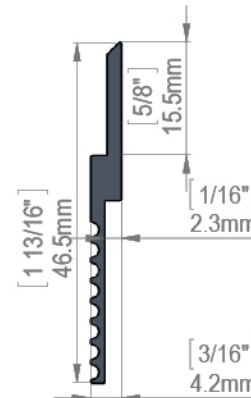


Scale: 1/1

Medium to Heavy duty application

Width	Item #
2 1/2" (63 mm)	ZCP3
36" (914 mm)	ZCP3-3
72" (1829 mm)	ZCP3-6

Lift 1/2"

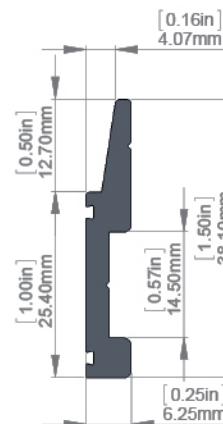

Scale: 1/1



Z-CLIP SAMPLE BOX WITH INSTRUCTION GUIDE

Description	Item #
ZCP Sample Box with 2 Pieces of ZCP1, ZCP2, ZCP3; Instruction Guide and Description	ZCPSampleBox


Flush Hanger

Zinc Steel



2 Holes

Description	Length	Thickness	Item #
Small Flush Mount Hanger Zinc Finish	1 5/8" (41.2 mm)	0.17" (4 mm)	FMH1Z

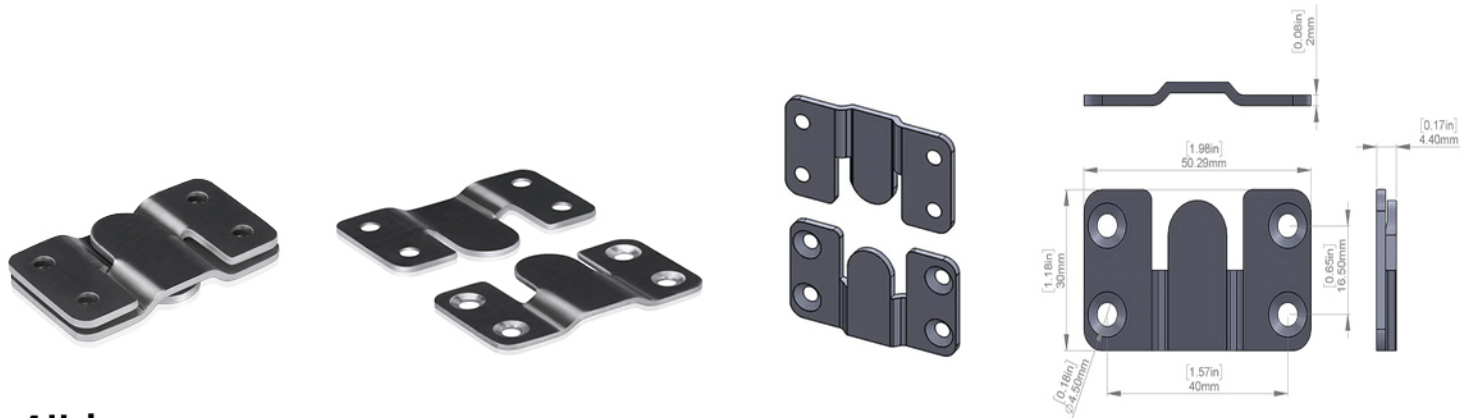

4 Holes

Description	Length	Thickness	Item #
Big Flush Mount Hanger Zinc Finish	2 1/16" (52.3 mm)	0.17" (4 mm)	FMH2Z





CABLE / ROD SYSTEMS




p102



p106



p107



p114



Shelf Supports

p117



Acrylic Sign Holders

p119



LED Poster Holder

p123



1/4" Rod Sign Holder

p124



1/4" Rod Accessories

p126



Aluminum Track and Accessories

p125



Magnetic Pot

p129

1/16" Diameter Multi Function Cable Kits

Wall to Wall, Ceiling to Floor, Wall to Floor, Wall to Ceiling

Aluminum

Aluminum Mounted Kit Includes:

- 2 adjustable mounts
- 1 cable 13' long, diameter 1/16" (1.50 mm) made from galvanized steel
- Spring tension adjuster
- Mounting hardware




Aluminum Clear Anodized

CS15A

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 2 adjustable mounts
- 1 cable 13' long, diameter 1/16" (1.50 mm) made from galvanized steel
- Spring tension adjuster
- Mounting hardware

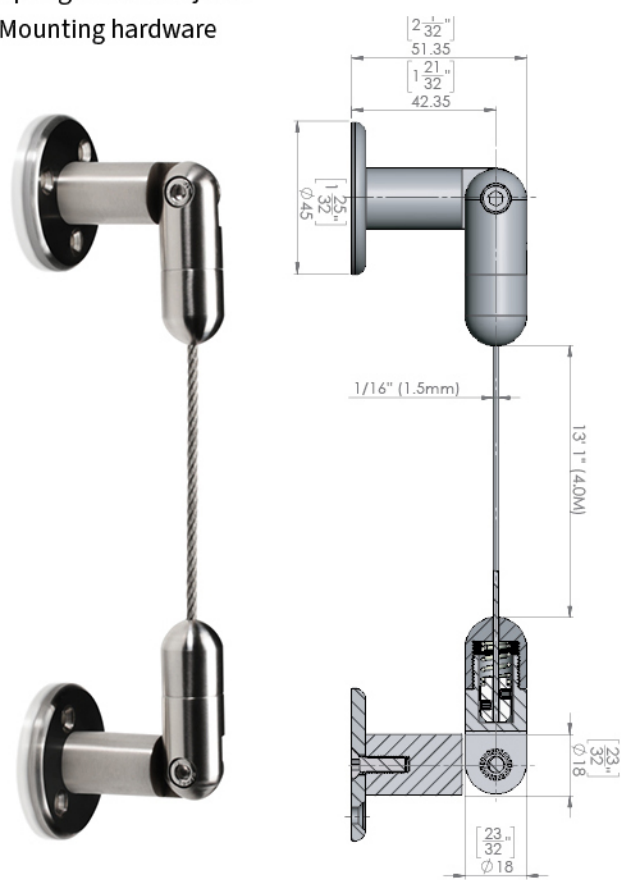

Satin Stainless Steel

CS15SS

ADJUSTABLE ANGLE UP TO 90°



1/16" Diameter Ceiling to Floor Mounted Cable Kits


For Signage, Display, Poster, Graphic, etc...

In this section, each of our cable kits; (aluminum or stainless steel); come with a 1/16" (approximately 1.5 mm) galvanized stainless steel cable. All of our stainless steel cables are composed of 7 strands and each strand consists of 7 wires which in turn gives a total of 49 wires twisted together. Our 1/16" diameter cables have a load capacity of 55 lbs (Approximately 115 kg). Each system kit (ceiling to floor, ceiling/floor to wall, wall to wall, and multi-function) come with a specific cable length but additional cable can be supplied upon request. All of our cable systems must be anchored into a solid material. Most of our cable kits can also be used with our track systems excluding only the multi-function kits. Additional cable diameters are available on pg. 92.

Aluminum

Aluminum Ceiling to Floor Mounted Kit Includes:

- 1 ceiling mount
- 1 cable 13' long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster
- Mounting hardware included

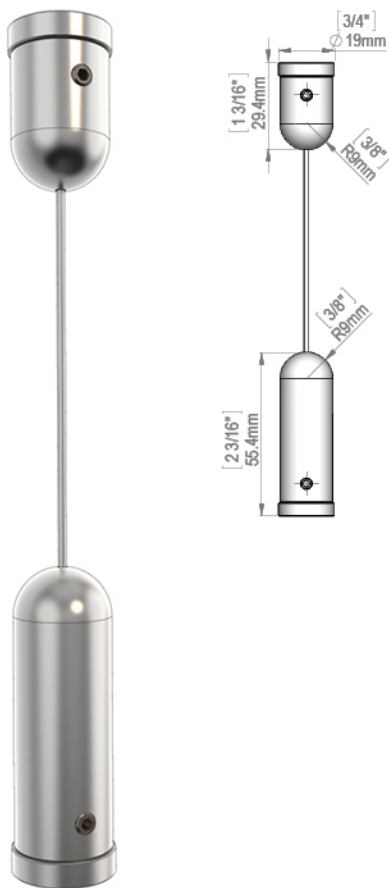


Aluminum Clear Anodized

ACG1904

Stainless Steel

Stainless Steel Ceiling to Floor Mounted Kit Includes:

- 1 ceiling mount
- 1 cable 16'4" long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster
- Mounting hardware not included

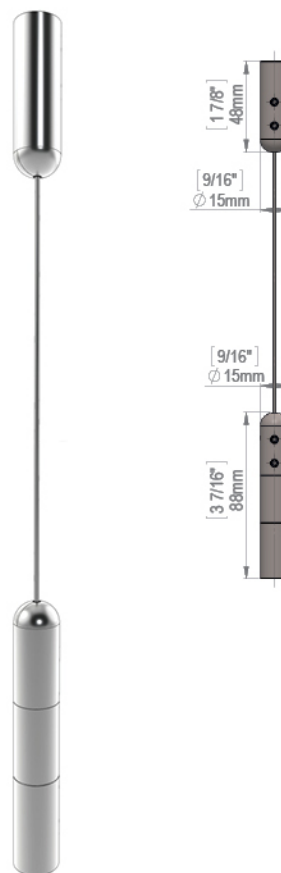

Stainless Steel

SCG1904

1/16" Diameter Ceiling /Floor to Wall Mounted Cable Kits


For Signage, Display, Poster, Graphic, etc...



Aluminum

Aluminum Mounted Kit Includes:

- 1 ceiling mount
- 1 cable 13' long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster, 1 horizontal arm,
- 1 washer stabilizer
- Mounting hardware included

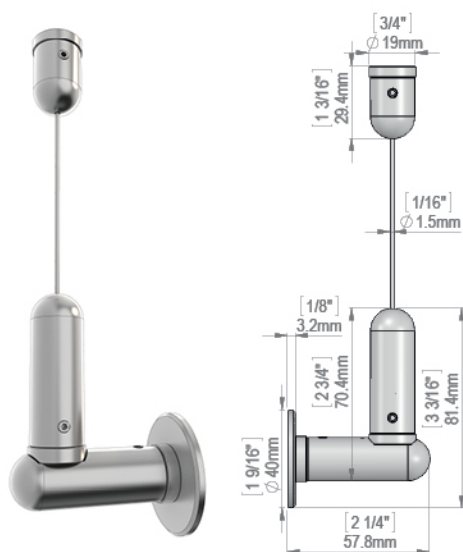


Aluminum Clear Anodized

ACG1907

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 1 ceiling mount
- 1 cable 16'4" long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster, 1 horizontal arm,
- 1 washer stabilizer
- Mounting hardware not included

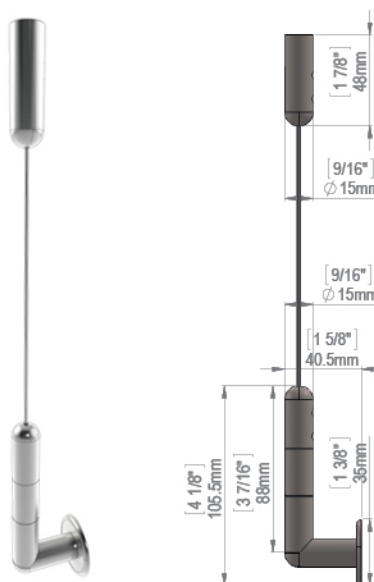

Satin Stainless Steel

SCG1905 & SCG1907




1/16" Diameter Wall to Wall Mounted Cable Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum

Aluminum Mounted Kit Includes:

- 2 mounts
- 1 cable 13'1" long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster, 2 horizontal arms, 1 vertical mount
- 2 washer stabilizer
- Mounting hardware included

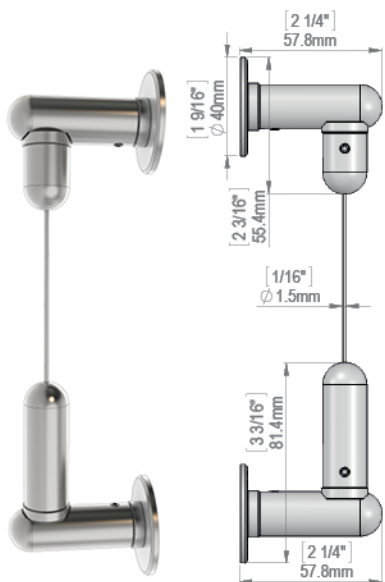


Aluminum Clear Anodized

ACG1908

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 2 mounts
- 1 cable 16'4" long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster, 2 horizontal arms, 1 vertical mount
- 2 washer stabilizer
- Mounting hardware not included

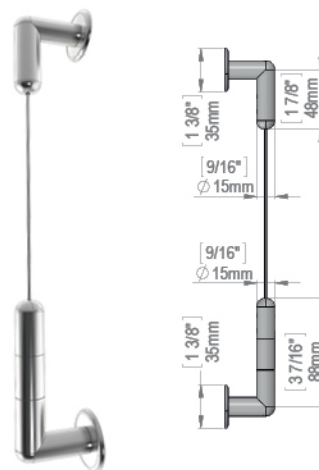

Satin Stainless Steel

SCG1908



Ceiling Mount for Cable System

SKU: 100.363



Cable Tension Adjuster

SKU: 100.362

1/8" Diameter Multi Function Cable Kits

Wall to Wall, Ceiling to Floor, Wall to Floor, Wall to Ceiling

In this section, each of our cable kits; (aluminum or stainless steel); come with a 1/8" (approximately 3 mm) galvanized stainless steel cable. All of our stainless steel cables are composed of 7 strands and each strand consists of 7 wires which in turn gives a total of 49 wires twisted together. Our 1/8" diameter cables have a load capacity of 78 lbs (Approximately 230 kg). Each system kit (ceiling to floor, ceiling/floor to wall, wall to wall, and multi-function) come with a specific cable length but additional cable can be supplied upon request. All of our cable systems must be anchored into a solid material. Most of our cable kits can also be used with our track systems excluding only the multi-function kits. Additional cable diameters are available on pg. 94

Aluminum

Aluminum Mounted Kit Includes:

- 2 adjustable mounts
- 1 cable 13' long, diameter 1/8" (3 mm) made from stainless steel
- Spring tension adjuster
- Mounting hardware included



Aluminum Clear Anodized

CS3A

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 2 adjustable mounts
- 1 cable 9'10" long, diameter 1/8" (3 mm) made from stainless steel
- Spring tension adjuster
- Mounting hardware included



Satin Stainless Steel

CS3SS

ADJUSTABLE ANGLE UP TO 90°



1/4" Ceiling to Floor Mounted Rod Kits


For Signage, Display, Poster, Graphic, etc...

Stainless Steel Rod Hanging Display Systems can be utilized for an elegant, clean look for heavier displays. A rod display system is the strongest hanging option on the market. MBS's rod systems have two options: stainless steel or aluminum. Don't forget to add an aluminum track rail system for mobility on your wall, floor, or ceiling.

Aluminum

Aluminum Mounted Kit Includes:

- 1 ceiling mount
- 1 rod
- 1 tension adjuster
- ARG1904-1 set with rod length L: 3' (1 m)
- ARG1904-2 set with stainless steel rod length L: 4' 11" (1.5 m)
- ARG1904-3 set with rod length L: 6' (2 m)
- ARG1904-4 set with rod length L: 9' (3 m)
- Mounting hardware included

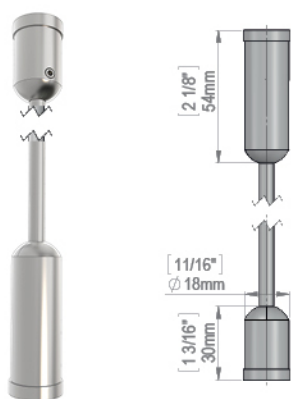


Aluminum Clear Anodized

ARG1904-*

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 1 ceiling mount
- 1 rod
- 1 tension adjuster
- SRG1904-1 set with rod length L: 3' (1 m)
- SRG1904-2 set with rod length L: 4' 11" (1.5 m)
- SRG1904-3 set with rod length L: 6' (2 m)
- SRG1904-4 set with rod length L: 9' (3 m)
- Mounting hardware not included

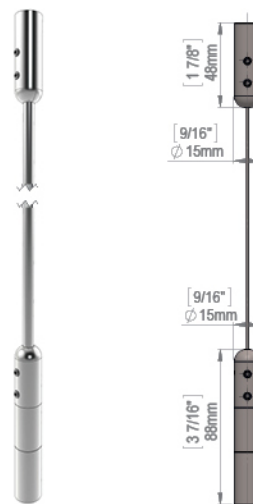

Stainless Steel Satin Finish

SRG1904-*




1/4" Ceiling to Wall / Wall to Floor Mounted Rod Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum

Aluminum Mounted Kit Includes:

- 1 ceiling / floor mount
- 1 rod
- 1 tension adjuster, 1 horizontal arm
- 1 washer stabilizer
- ARG1905 • ARG1906: Without Rod
- ARG1905-1 • ARG1906-1: set with rod length L: 3' (0.91 m)
- ARG1905-2 • ARG1906-2: set with stainless steel rod length L: 4'11" (1.5 m)
- ARG1905-3 • ARG1906-3: set with rod length L: 6' (2 m)
- ARG1905-4 • ARG1906-4: set with rod length L: 9' (2.5 m)
- Mounting hardware included

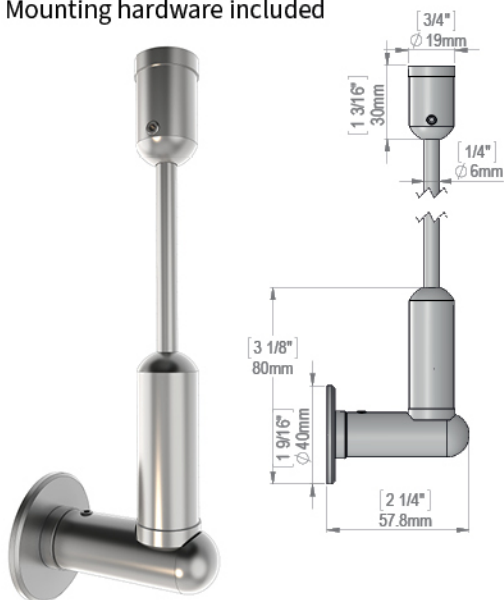

Ceiling to Wall

SRG1905-*


Floor to Wall

SRG1906-*

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 1 ceiling / floor mount
- 1 rod
- 1 tension adjuster, 1 horizontal arm
- 1 washer stabilizer
- SRG1905-1 • ARG1906-1: set with rod length L: 3' (0.91 m)
- SRG1905-2 • SRG1906-2: set with rod length L: 4'11" (1.5 m)
- SRG1905-3 • SRG1906-3: set with rod length L: 6' (2 m)
- SRG1905-4 • SRG1906-4: set with rod length L: 9' (2.5 m)
- Mounting hardware not included

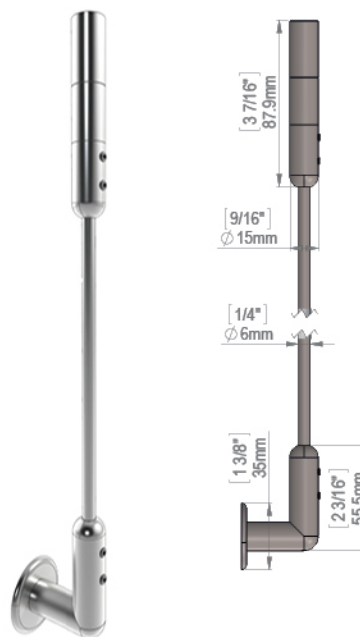

Ceiling to Wall

SRG1905-*

Floor to Wall

SRG1906-*




1/4" Wall to Wall Mounted Rod Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum

Aluminum Mounted Kit Includes:

- 2 washer stabilizers, 2 horizontal arms, 2 ceiling mounts
- 1 rod
- 1 tension adjuster
- ARG1907-1 set with rod length L: 3' (0.91 m)
- ARG1907-2 set with stainless steel rod length L: 4'11" (1.5 m)
- ARG1907-3 set with rod length L: 6' (2 m)
- ARG1907-4 set with rod length L: 9' (2.5 m)
- Mounting hardware included

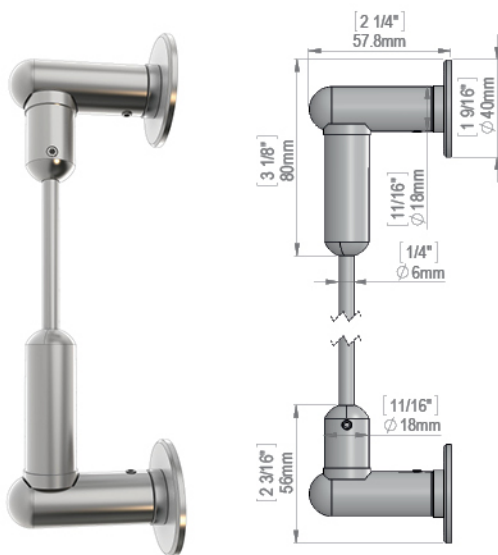


Aluminum Clear Anodized

ARG1907-*

Stainless Steel

Stainless Steel Mounted Kit Includes:

- 2 washer stabilizers, 2 horizontal arms, 2 ceiling mounts
- 1 rod
- 1 tension adjuster
- SRG1907-1 set with rod length L: 3' (0.91 m)
- SRG1907-2 set with rod length L: 4'11" (1.5 m)
- SRG1907-3 set with rod length L: 6' (2 m)
- SRG1907-4 set with rod length L: 9' (2.5 m)
- Mounting hardware not included

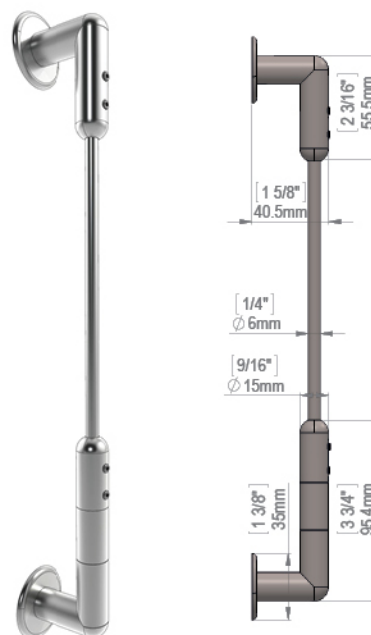

Stainless Steel Satin Finish

SRG1907-*




3/8" Ceiling to Floor/ Wall to Ceiling Mounted Rod Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum Clear Anodized or Matte Black

Aluminum Mounted Kit Includes:

- 1 ceiling mount, 1 floor mount
- 1 rod
- 1 tension adjuster
- ARG3904A, ARG3904B -1 set with rod length L: 3' (0.91 m)
- ARG3904A-2, ARG3904B-2 set with rod length L: 6' (1.8 m)
- ARG3904A-3, ARG3904B-3 set with rod length L: 9' (2.7 m)
- ARG3904A-4, ARG3904B-4 set with rod length L: 12' (3.6 m)
- Mounting hardware included

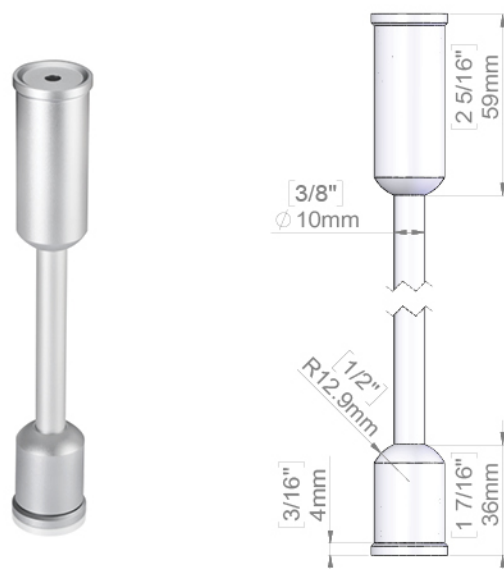

Aluminum Clear Anodized


ARG3904A-*

Aluminum Matte Black Anodized

ARG3904B-*

Aluminum Mounted Kit Includes

- 1 ceiling mount
- 1 rod
- 1 horizontal arm
- 1 washer stabilizer
- ARG3910A-1, ARG3910B-1 set with rod length L: 3' (0.91 m)
- ARG3910A-2, ARG3910B-2 set with rod length L: 6' (1.8 m)
- ARG3910A-3, ARG3910B-3 set with rod length L: 9' (2.7 m)
- ARG3910A-4, ARG3910B-4 set with rod length L: 12' (3.6 m)
- Mounting hardware not included

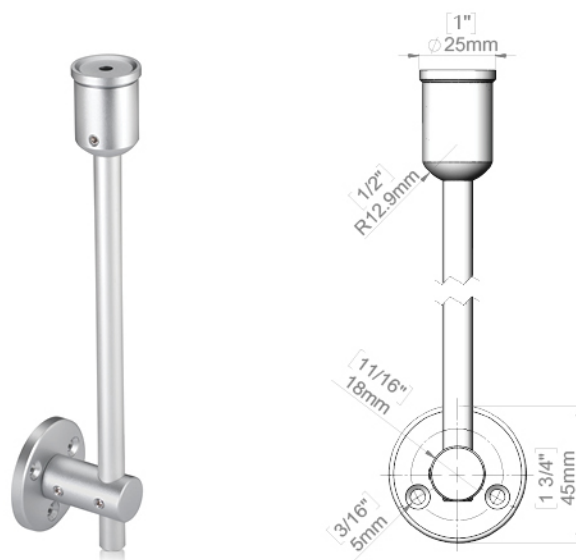

Aluminum Clear Anodized

ARG3910A-*

Aluminum Matte Black Anodized

ARG3910B-*




3/8" Wall to Wall Mounted Rod Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum Clear Anodized or Matte Black

- Aluminum Mounted Kit includes
- 2 horizontal mounts
- 1 rod
- 1 tension adjuster, 1 horizontal arm
- 2 washers stabilizer
- ARG3909A-1, ARG3909B-1 set with rod length L: 3' (0.91 m)
- ARG3910A-2, ARG3910B-2 set with rod length L: 6' (1.8 m)
- ARG3909A-3, ARG3909B-3 set with rod length L: 9' (2.7 m)
- ARG3909A-4, ARG3909B-4 set with rod length L: 12' (3.6 m)
- Mounting hardware not included

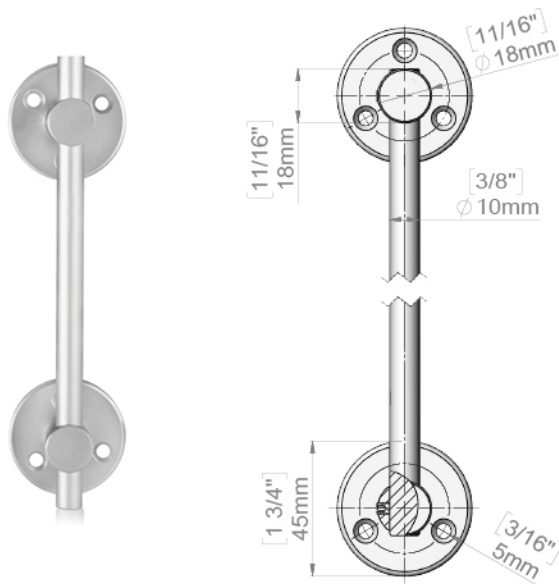

Aluminum Clear Anodized ARG3909A-*

Aluminum Matte Black Anodized ARG3909B-*



New *Signature* Cable Systems



Matte Black Anodized

1/16" Cable Diameter	SCS15MP
1/8" Cable Diameter	SCS3MP



Clear Anodized






1/16" Cable Diameter	SCS15A
1/8" Cable Diameter	SCS3A



Chrome Polished

1/16" Cable Diameter	SCS15MP
1/8" Cable Diameter	SCS3MP


Panel Grips Diameter Cable Kits

			Material Thickness	Gap from Cable	Cable 1/16"		Cable 1/8"	
					Aluminum	Stainless Steel	Aluminum	Stainless Steel
Vertical Support								
		Single Sided	1/16" to 3/16"	1/8"	ACA1016	SCA1016	N/A	N/A
		Double Sided	1/16" to 3/16"	1/8" × 2"	ACA1023	SCA1023	N/A	N/A
		Single Sided	1/8" to 3/8"	3/16"	ACA1610	SCA1610	ACA31610	SCA31610
		Double Sided	1/8" to 3/8"	N/A	ACA1612	SCA1612	ACA31612	SCA31612
		Single Sided	1/8" to 3/8"	N/A	ACA1660	SCA1660	ACA31660	SCA31660
Pivoting Support								
		Single Sided	1/8" to 3/8"	1/2"	ACA1620	SCA1620	ACA31620	SCA31620
		Double Sided	1/8" to 3/8"	1/2" × 2"	ACA1622	SCA1622	ACA31622	SCA31622
		Single Sided	3/16" to 1/2"	N/A	N/A	SCA1810	N/A	SCA1810B
		Double Sided	3/16" to 1/2"	N/A	N/A	SCA1812	N/A	SCA1812B
		Single Sided	1/8" to 1/2"	1/2"	ACA2010	SCA2010	ACA32010	SCA32010
		Double Sided	1/8" to 1/2"	1/2" × 2"	ACA2012	SCA2012	ACA32012	SCA32012


Rod 1/4"		Rod 3/8"	
Aluminum	Stainless Steel	Aluminum	Matte Black

N/A	N/A	ARA3610A	ARA3610B
N/A	N/A	ARA3612A	ARA3612B
ARA1610	SRA1610	N/A	N/A
ARA1612	SRA1612	N/A	N/A
N/A	N/A	N/A	N/A
ARA1620	SRA1620	ARA3620A	ARA3620B
ARA1622	SRA1622	ARA3622A	ARA3622B
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
ARA2010	SRA2010	ARA3810A	ARA3810B
ARA2012	SRA2012	ARA3812A	ARA3812B


TECHNICAL DETAILS




CA1016




CA1023




CA1610




CA1612




CA1620



RA1622



RA2010



CA2012

Signature Cable Systems



1/16" Diameter Mounted Cable Kits

For Signage, Display, Poster, Graphics, etc...

Aluminum Clear Anodized / Matte Black

Aluminum Mounted Kit Includes:

- 2 Arms
- 1 cable 13' long, diameter 1/16" (1.50 mm) made from galvanized steel
- 1 tension adjuster in 1 arm,
- 2 washer stabilizer
- Mounting hardware included

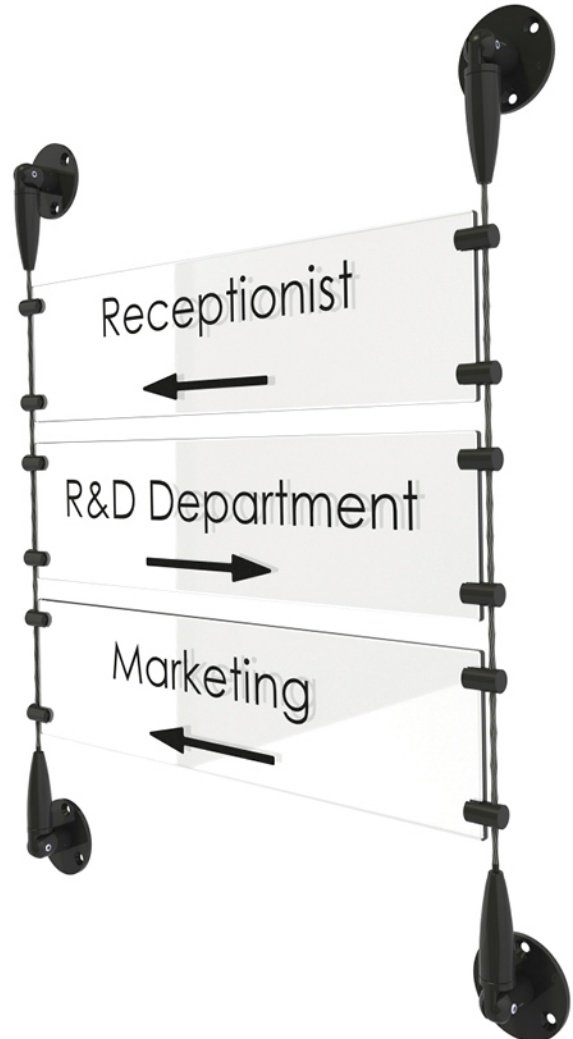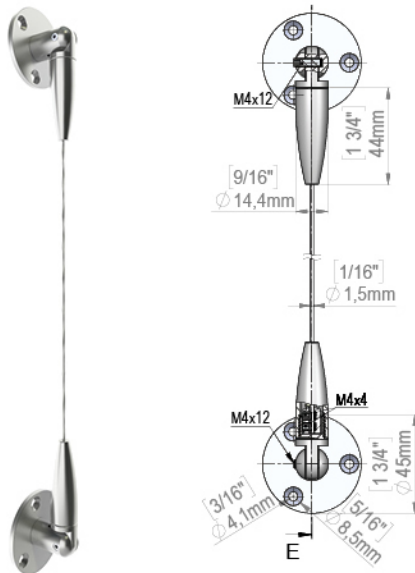

Aluminum Clear Anodized

SCS15A

Aluminum Matte Black

SCS15MB



Signature Cable Systems



1/8" Diameter Mounted Cable Kits

For Signage, Display, Poster, Graphic, etc...

Aluminum Clear Anodized / Matte Black

Aluminum Mounted Kit Includes:

- 2 Arms
- 1 cable 13' long, diameter 1/8" (3 mm) made from galvanized steel
- 1 tension adjuster in 1 arm,
- 2 washer stabilizer
- Mounting hardware included

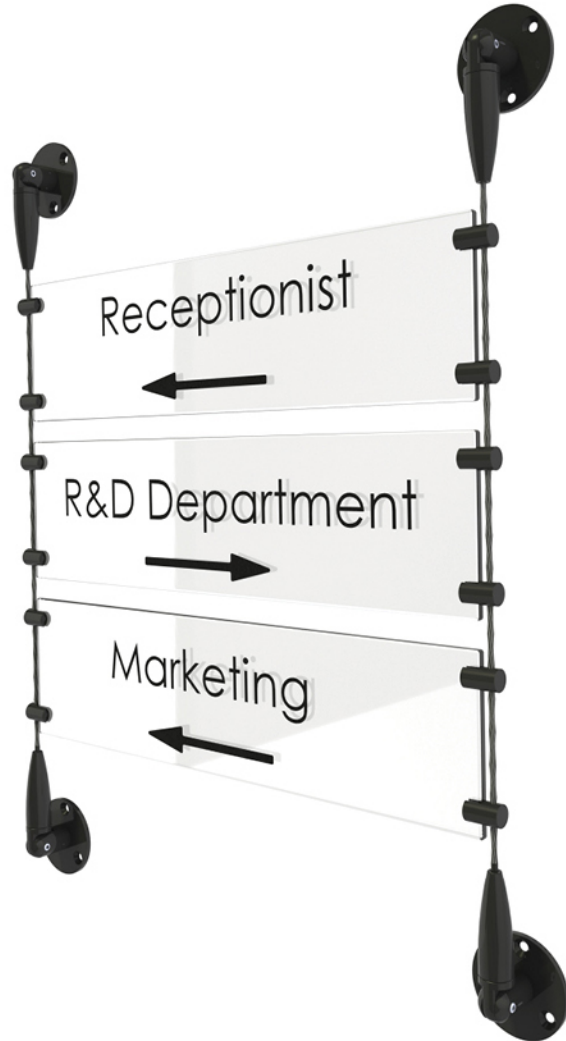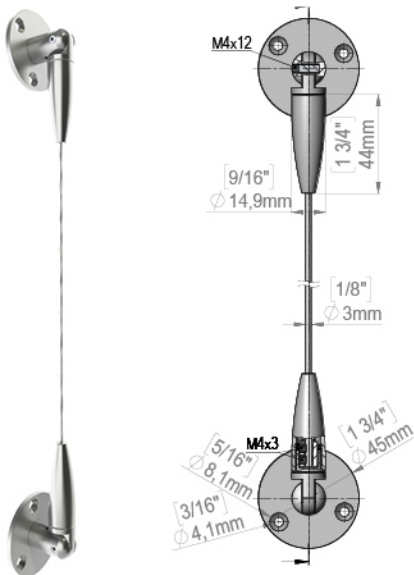

Aluminum Clear Anodized



SCS3A

Aluminum Matte Black

SCS3MB



Panel Grips For Cable & Rod

			Material Thickness	Gap from Cable	Hole Material	1/16" Cable		1/8"
						Aluminum	Stainless Steel	Aluminum
Panel Support								
		Single Sided	1/16" to 5/16"	3/16"	1/4"	ACA1640	SCA1640	ACA31640
		Double Sided	1/16" to 5/16"	3/16"x2"	1/4"	ACA1642	SCA1642	ACA31642
Edge Support								
		Single Sided	1/16" to 3/8"	N/A	N/A	ACA1630	SCA1630	ACA31630
		Top Edge	1/8" to 3/8"	N/A	N/A	N/A	N/A	N/A
Pivoting Edge Support								
		Single Sided	1/16" to 3/8"	1/2"	N/A	ACA1631	SCA1631	ACA31631
		Double Sided	1/16" to 3/8"	1/2" x 2	N/A	ACA1632	SCA1632	ACA31632
Horizontal Support								
		Single Sided	1/16" to 5/16"	3/16"	N/A	ACB1610	SCB1610	ACB31610
		Double Sided	1/16" to 5/16"	3/16"x2"	N/A	ACB1612	SCB1612	ACB31612




Extended Stainless Steel M5 Threaded Head for 1/2" Material
Used with SCA1640, SCA1642, SRA1640, SRA1642
Item# SRA1640-H12

Cable	1/4" Rod		3/8" Rod	
	Aluminum	Stainless Steel	Aluminum	Black Matte


SCA31640	ARA1640	SRA1640	ARA3640A	ARA3640B
SCA31642	ARA1642	SRA1642	ARA3642A	ARA3642B
SCA31630	N/A	N/A	N/A	N/A
N/A	ARA1660	SRA1660	N/A	N/A
SCA31631	ARA1631	SRA1631	ARA3631A	ARA3631B
SCA31632	ARA1632	SRA1632	ARA3632A	ARA3632B
SCB31610	ARB1610	SRB1610	ARB3610A	ARB3610B
SCB31612	ARB1612	SRB1612	ARB3612A	ARB3612B

TECHNICAL DETAILS

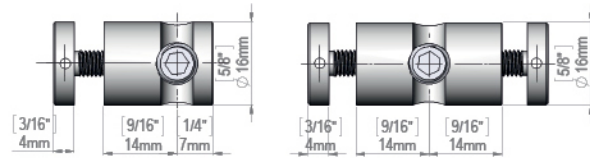


RA1640

RA1642




CA1630

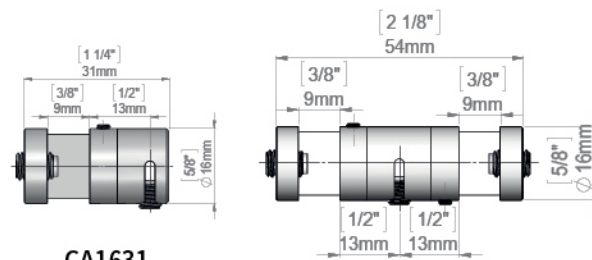


CA1631

CA1632




CB1610




CB1612

Cross Clamp Support



CS3CTA

99% of Orders Ship Same Day!

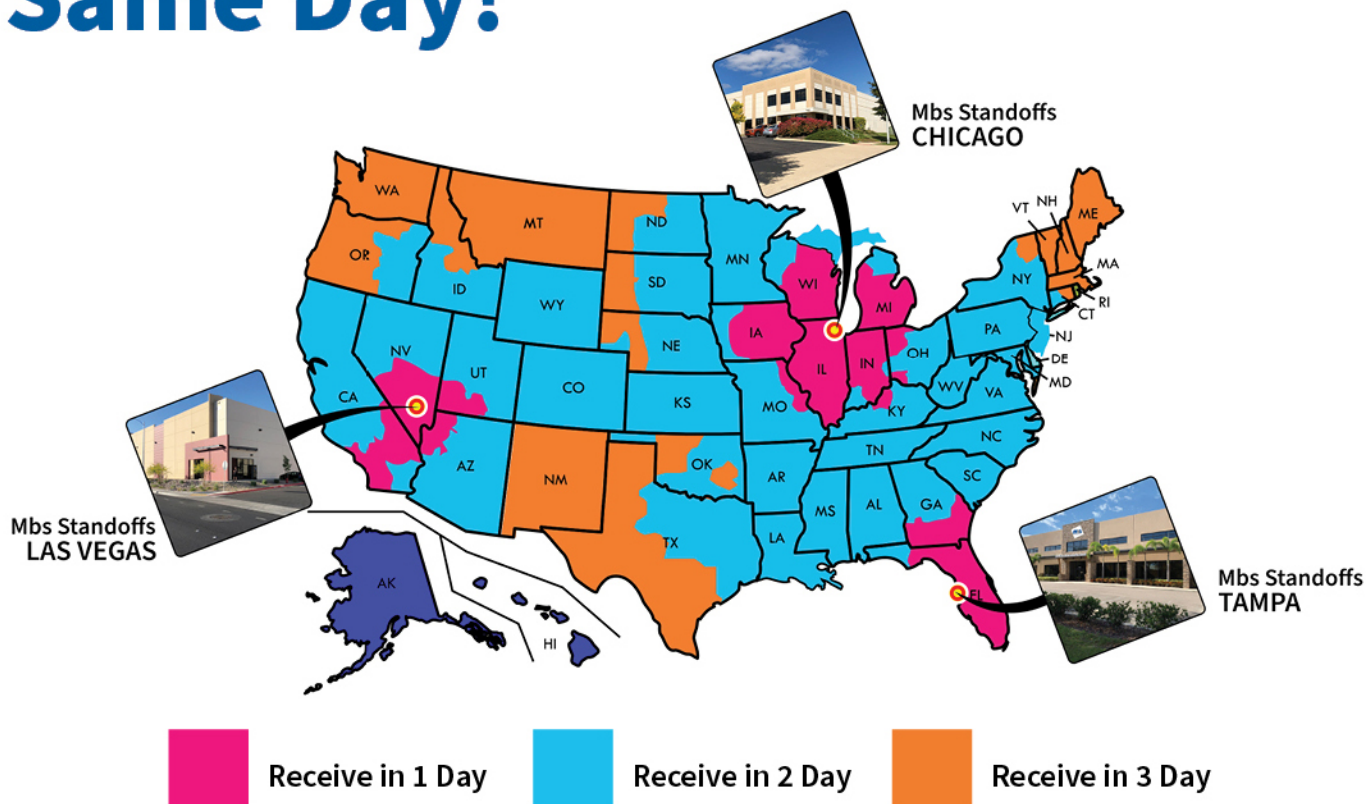

Free Daily Pickup and 1 or 2 Days Ground Shipping to Most of the States

Daily Pick-ups

- We have a daily pick-up, so that all of our customers can take advantage of same day shipping.
- **Blind Shipping & Drop Shipping Available Upon Request (Fees may apply)**
- Don't forget we can always ship on your account.
- If you are local, you can pick up your order within 30 minutes of placing your order.



Monday–Thursday up to 6:30pm,
Friday up to 5:30pm

Monday–Thursday up to 6:30pm,
Friday up to 5:30pm



Shipping to Canada with Fedex, UPS & USPS, and anywhere in the world with DHL



NEW 3/8" Diameter Rod
Clear Anodized Finish
Black Matte Finish



Shelf Supports

			Material Thickness	Gap from Cable	Monting Diameter	Cable 1/16"		Cable
						Aluminum	Stainlees Steel	Aluminum
Shelf Support								
			1/8"	NA	5/16"	ACA1650	SCA1650	ACA31650
Pivoting Shelf Support								
	Single Sided	1/4" to 3/4"	1/2"	NA		ACA1651	SCA1651	ACA31651
	Double Sided	1/4" to 3/4"	1/2" x 2	NA		ACA1652	SCA1652	ACA31652
Retainer Screw								
	Single Sided	1/8" to 3/8"	NA	1/4"		ACA1653	SCA1653	ACA31653
Tempered Glass								
3/16" Thick		Size	10" x 24"	10" x 36"	12" x 12"	12" x 24"	12" x 36"	
		Item #	TG10-24	TG10-36	TG12-12	TG12-24	TG12-36	


Accessories

	Diameter	Rod 1/4"		Rod 3/8"	
		Aluminum	Stainlees Steel	Aluminum	Matte Black
Rod					
36'' Aluminum Rod, Thread and Tapped M4	NA	ROD3A	ROD3	ROD310A	ROD310B
End Rod, Male/Female Thread and Tapped M4	NA	ROD3A-EA	ROD3-ESS	ROD310-EA	ROD310-EB
Rod Finish Ball	NA	ARA1630	SRA1630	N/A	N/A
Pivoting Standoffs for Rod					
Pivoting Standoff for Rod (Vertically or Horizontally Mount)	5/8"	ASA1724	SSA1724	N/A	N/A




Rod 1/8"	Rod 1/4"		Rod 3/8"	
	Aluminum	Stainless Steel	Aluminum	Matte Black
SCA31650	ARA1650	SRA1650	ARA3650A	ARA3650B
SCA31651	ARA1651	SRA1651	ARA3651A	ARA3651B
SCA31652	ARA1652	SRA1652	ARA3652A	ARA3652B
SCA31653	N/A	N/A	N/A	N/A


TECHNICAL DETAILS




CA1650




CA1651



CA1652



CA1653

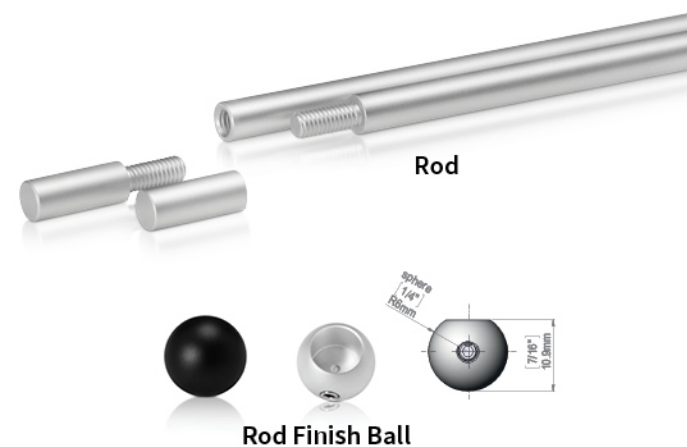

Rod

Rod Finish Ball



End Rod



Ceiling Suspended Kit
M6 Reverse Thread
Clear or Matte Black
ARG3902A



Pivoting Standoffs for Rod

BULK QUANTITY? PERSONALIZED DESIGNS? SPECIAL REQUESTS?

Contact us today!

Our Signage Hardware Experts Will be Delighted To Assist You!

1-813-938-6025 • sales@mbs-standoffs.com



Acrylic Sign Holders

Sign Holders for Inserts



This acrylic sign holder is ideal for displaying marketing materials. The 8.5" x 11" top insert frame allows users to quickly and easily switch out signage selections. This sign holder that hangs in a cable system, also known as acrylic literature frame, is an exciting way to create signage in any environment.

Purchasers can use one of these literature frames or create a system by using multiple acrylic panels! This sign holder is made of crystal clear acrylic. Frames are in stock, you can purchase today.

This fold-over sign holder can be mounted onto the cable system virtually anywhere to maximize viewing. These acrylic frames are ideal for use in retail stores, restaurants, and more! This sign holder that holds 8.5" x 11" graphics is affordable and convenient! This panel holds signage in portrait + landscape orientation only. There is a large selection of acrylic poster frames and cable hanging systems in this online catalog. This acrylic sign holder is an impressive way to showcase 8.5" x 11" graphics when combined with the cable hanging kit.

Mbs is proud to provide Cable & Rod Systems.

These systems are extremely versatile and create amazingly subtle displays that can be integrated into any environment. With so many applications including suspending, shelving, signage, decorative displays, showcase displays and graphic displays, Mbs is sure to meet your displays needs.



Acrylic Sign Holders


Sign Holders for Inserts

8.5" × 11" Acrylic Sign Holder

Vertical Letter Holder

- 1 clear acrylic holder for letter sizes 8.5" × 11"
- With 2 magnets on the top to keep acrylic closed
- Acrylic only, hardware not included

Acrylic Sign Holder	AC8511
---------------------	--------

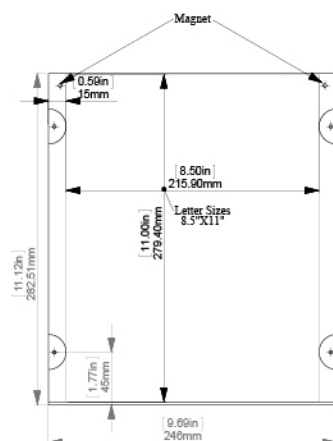


11" × 8.5" Acrylic Sign Holder

Horizontal Letter Holder

- 1 clear acrylic holder for letter sizes 11" × 8.5"
- With 2 magnets on the top to keep acrylic closed
- Acrylic only, hardware not included

Acrylic Sign Holder	AC1185
---------------------	--------

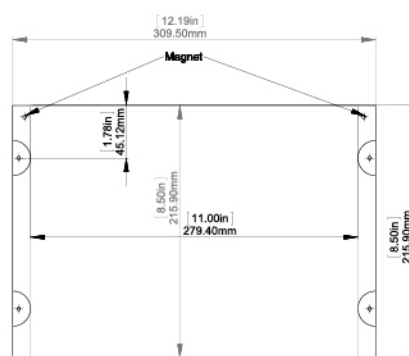


11" × 17" Acrylic Sign Holder

Vertical Ledger Holder

- 1 clear acrylic holder for letter sizes 11" × 17"
- With 2 magnets on the top to keep acrylic closed
- Acrylic only, hardware not included

Acrylic Sign Holder	AC1117
---------------------	--------




17" × 11" Acrylic Sign Holder

Horizontal Ledger Holder

- 1 clear acrylic holder for letter sizes 17" × 11"
- With 2 magnets on the top to keep acrylic closed
- Acrylic only, hardware not included

Acrylic Sign Holder	AC1711
---------------------	--------



Acrylic Sign Holders

Sign Holders for Inserts



EXAMPLE: To do this set, you have to purchase 1 of the kit AC8511-2 and 2 extensions AC8511-2E




Watch Video

Description	Item #
Clear Acrylic Sign Holder Kit for Media 1 × 8.5" × 11" Kit includes: (2) ACG1908, (4) ACA1016, (1) 1AC8511	AC8511-1
Clear Acrylic Sign Holder Kit for Media 2 × 8.5" × 11" Kit includes: (2) ACG1908, (8) ACA1016, (2) AC8511	AC8511-2
Clear Acrylic Sign Holder Kit for Media 3 × 8.5" × 11" Kit includes: (2) AGG1908, (12) ACA1016, (3) AC8511	AC8511-3
Clear Acrylic Sign Holder Kit for Media 4 × 8.5" × 11" Kit includes: (2) ACG1908, (16) ACA1016, (4) AC8511	AC8511-4
Clear Acrylic Sign Holder Kit for Media 5 × 8.5" × 11" Kit includes: (2) AGG1908, (20) ACA1016, (5) AC8511	AC8511-5
Clear Acrylic Frame for Media 8.5" × 11" (With 3M Velcro) Kit includes: (2) ACG1908, (4) ACA1016, (1) AC8511	AC8511V

Also available in Stainless Steel

Extension For Acrylic Sign Holders

Sign Holders for Inserts

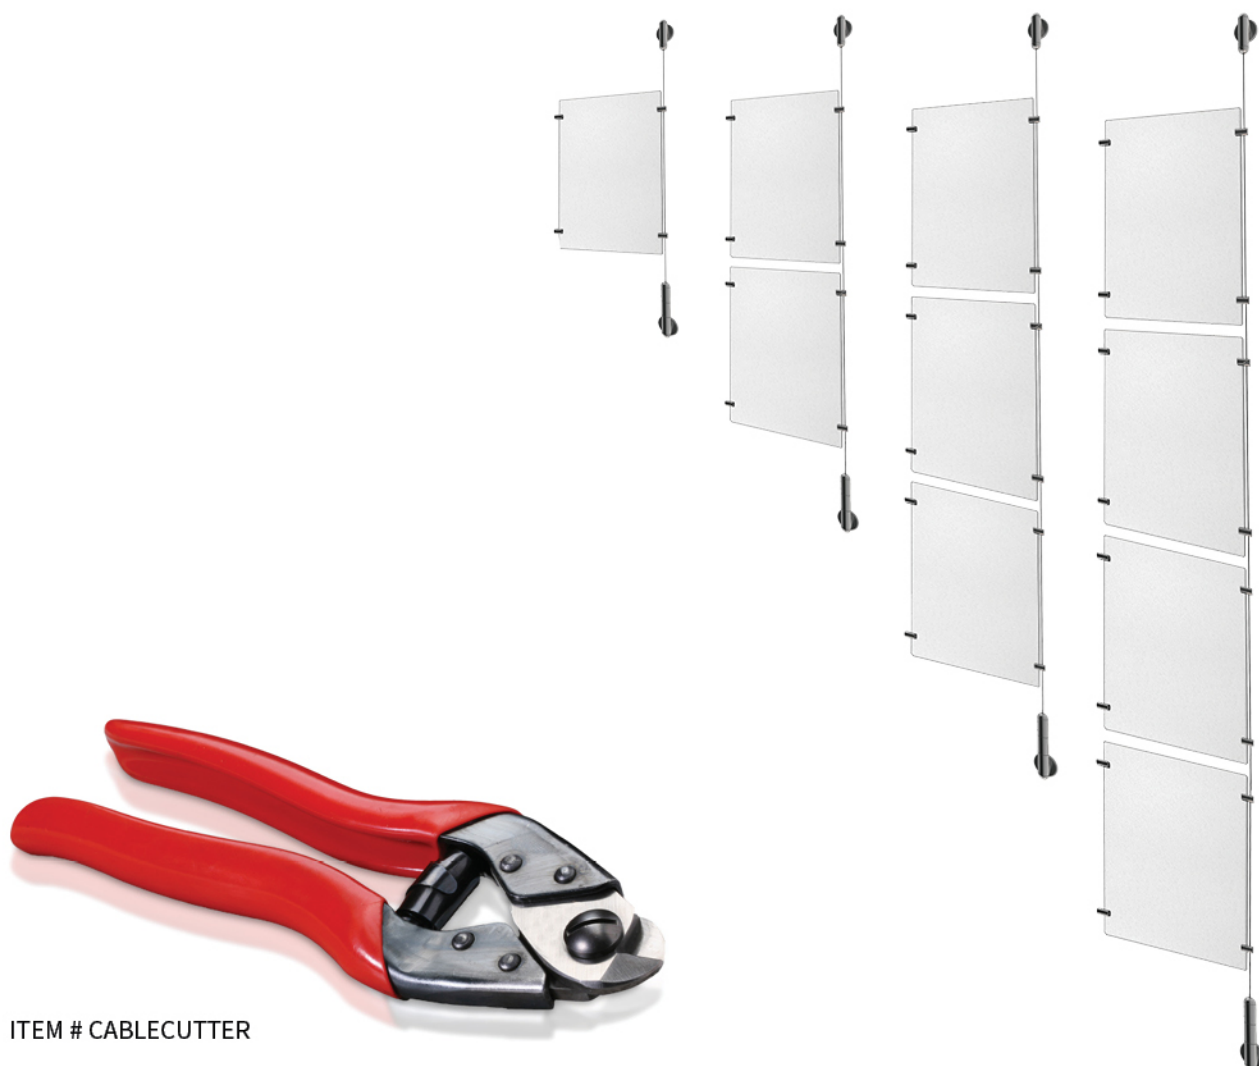

ITEM # CABLECUTTER

Description	Item #
Clear Acrylic Sign Holder Extension Kit for Media 1 × 8.5" × 11" Kit includes: (1) ACG1908, (2) ACA1023, (1) AC8511	AC8511-1E
Clear Acrylic Sign Holder Extension Kit for Media 2 × 8.5" × 11" Kit includes: (1) ACG1908, (4) ACA1023, (2) AC8511	AC8511-2E
Clear Acrylic Sign Holder Extension Kit for Media 3 × 8.5" × 11" Kit includes: (1) ACG1908, (6) ACA1023, (3) AC8511	AC8511-3E
Clear Acrylic Sign Holder Extension Kit for Media 4 × 8.5" × 11" Kit includes: (1) ACG1908, (8) ACA1023, (4) AC8511	AC8511-4E
Clear Acrylic Sign Holder Kit for Media 5 × 8.5" × 11" Kit includes: (1) ACG1908, (10) ACA1023, (5) AC8511	AC8511-5

Also available in Stainless Steel



AMERICA'S # 1 CHOICE FOR STANDOFFS

LED Poster Holder

Our back lit frames consist of two thin acrylic panels which form an illuminated sign less than 1/2" thick. Ceiling-to-floor, ceiling-to-wall, wall-to-floor or wall-to-wall cable systems are a unique, modern and eye appealing way to suspend graphics in store front windows.

Our brushed silver cable system components create a great contrast with the black face of back lit frames. LED back lighting is also energy efficient and reduces your energy cost as well as your carbon foot print. Our back lit frames, similar to light boxes, illuminate graphics printed on translucent materials. This technology will help you increase your exposure and visibility.

Not only will the bright LED illumination draw your customer's attention, it will also allow you to build a repeat customer base by offering your products and/or services utilizing this unique and modern design. The "suspended in mid-air" look, will catch your customer's eye and retain their attention with its sleek and classy appearance.

Each sign panel is held together with decorative hardware and has backers with illuminated bevelled edges.

The acrylic overlay has an opaque black border that deflects the edge lighting. The result is a soft glow around the acrylic back lit frames which increases its visual appeal.

As a user, you will find that the LED lighting provides a distinct upgrade in display quality as well as brightness and definition in comparison to traditional neon signage or fluorescent bulbs.

Today's consumers are increasingly aware of environmental issues and are rewarding companies who take the proper steps to minimize pollution and their overall negative impact on our planet. Our LED products will provide you with that edge and will send a positive message to your customers.

Please Note: Posters printed on a translucent material are recommended for use in these light boxes in order to maximize the effect created by the LED back lighting.

Description	Item #
LED Poster Holder Kit 1. Single Sided LED Light Pocket Letter Size	KLP1
LED Poster Holder Kit 2. Single Sided LED Light Pocket Letter Size	KLP2
LED Poster Holder Kit 3. Single Sided LED Light Pocket Letter Size	KLP3
LED Poster Holder Kit 4. Single Sided LED Light Pocket Letter Size	KLP4
Single Sided LED Light Pocket Letter Size	AS-USP2



LED Poster Holder

ACCESSORIES





Power Connector

For wire: AWG 14
(low tension 12-24V)

For cable diameter: 1/16" (1.50 mm)

Aluminum Clear Anodized **ACA1212**

Stainless Steel **SCA1212**

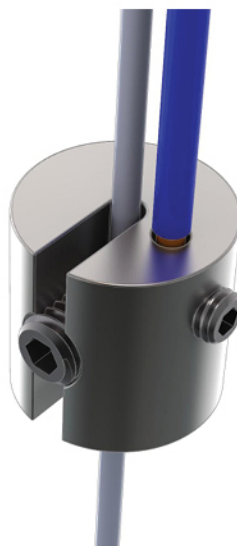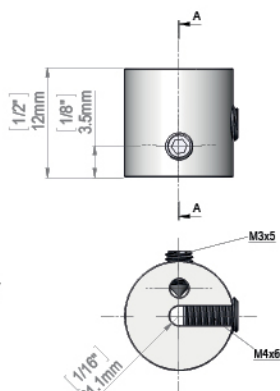

Transformer

TR01-1: AC/DC adapter for 1 LED panel

TR01-2: AC/DC adapter for 2 LED panel

TR01-4: AC/DC adapter for 3-4 LED panel

Transformer

TR01



1/4" Rod Sign Holder

Sign Holder

- Our cleverly designed rod display system is perfect for any application.
- Our supports can be placed any distance apart making it versatile to any size sign needing to be displayed.
- These rod display systems use the same techniques as the cable system, only using stainless steel or aluminum rods instead.
- Highly recommended for heavy duty hanging.
- Rods can be easily fastened together for any length desired.
- Rod ends can be finished with a nifty aluminum "ball" or end cap to provide the perfect professional image.
- Use with ASA1724, SSA1724 or (pivoting standoff support), ROD3, ROD3A (1/4" diameter, 3' length rod), and our pivoting supports.
- The rod system is now in stock and available for next day delivery.



Acrylic Sign Holder


- Acrylic sign holders are used for displaying manuals, magazines, literature, greeting cards, flyer and more.
- Our high quality acrylic sign holders are made of acrylic material for long lasting durability.
- Features an impact resistant design for superior performance.
- Accepts media 8.5" × 11" or under vertically.
- Use with ASA1724 (pivoting standoff support) and our ROD3, ROD3A (1/4" diameter, 3' length rod)



Description	Finish	Diameter	Item #
Rod Ceiling Mount	Satin Brushed	5/8" (15 mm)	100.363-SR
Rod Tension Adjuster	Satin Brushed	9/16"	100.362-R
Vertical Assembly Arm	Satin Brushed	9/16"	100.364
Washer Stabilizer	Satin Brushed	1 3/8"	100.365
Stainless Steel Wall Mount	Satin Brushed	11/16" (17 mm)	SSA1724
Aluminum Wall Mount	Clear Anodized		ASA1724
Stainless Steel Rod	Satin Brushed	1/4" (6 mm)	ROD3
Aluminum Rod	Clear Anodized		ROD3A

1/4" Rod Sign Holder

8.5" × 11" Clear Acrylic Sign Holder

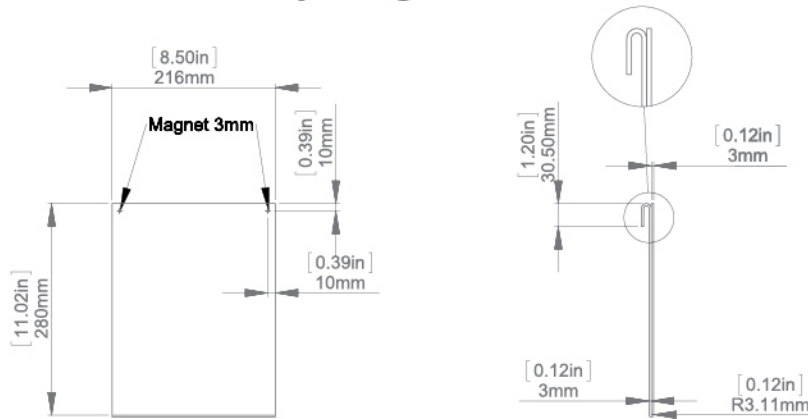

Vertical Letter Size Holder:


- 1 clear acrylic holder for letter sizes 8.5" × 11"
- With 2 magnets on the top to keep acrylic closed
- Acrylic only, hardware not included

Acrylic Sign Holder

RAC8511



For this of assembly you need to purchase:
ASA1724, ROD3 or SRG1900-2, RAC8511

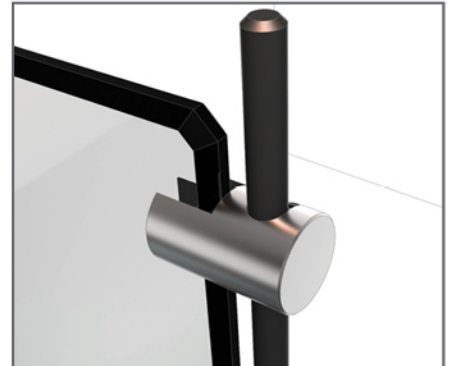


1/4" Rod Accessories

36" Rod

- 1/4" (6 mm) diameter thread and tapped M4
- ROD3A: 36" (914.4 mm) (indoor use only)
- ROD3A can be assembled together to get the length you need, use ROD3-E to close ends
- Can be cut

Stainless Steel SS201	ROD3
Aluminum Clear Anodized	ROD3A

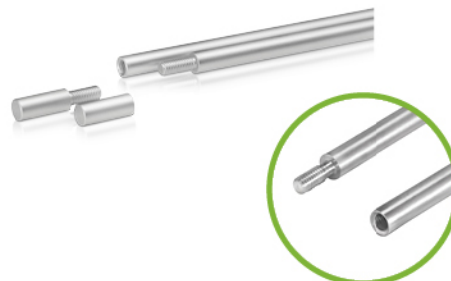

End Rod

- Male | Female
- 1/4" (6 mm) diameter thread and tapped M4
- Indoor use only


Stainless Steel SS201	ROD3-ESS
Aluminum Clear Anodized	ROD3-EA



Rod

- Stainless steel rod satin finish 1/4" (6 mm) diameter
- SRG1900-2 L: 4' 11" (1.5 m)

Stainless Steel SS201	SRG1900-2
-----------------------	-----------

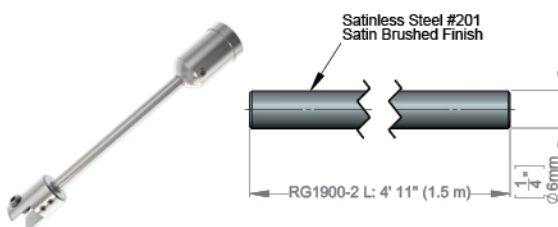

Rod Finish Ball

Diameter: 1/2" (12.7 mm)

Rod finish ball for rod diameter: 1/4" (6 mm)

Aluminum Clear Anodized	ARA1630
-------------------------	---------



Pivoting Standoff for Rod

Diameter: 5/8" (16 mm)

Pivoting standoff ball for rod diameter: 1/4" (6 mm)

Standoff: 1/2" (12.7 mm)

Stainless Steel SS201	SSA1724
Aluminum Clear Anodized	ASA1724



Aluminum Track and Accessories

Cable/Rod Aluminum Arm

Arm Diameter: 9/16" (14.28 mm)

Washer Diameter: 1 1/2" (38 mm)


Clear Anodized Aluminum Arm	CRAA
Aluminum Washer	CRWA



Aluminum Track

- Aluminum track fixing for mobility
- Clear anodized finished
- L: 6' (1.80 m)


Aluminum Track	AT1911
----------------	--------



Parallelogram Track Fixing

Parallelogram track fixing for aluminum track profile




Parallelogram Track Fixing	ACW4001
----------------------------	---------

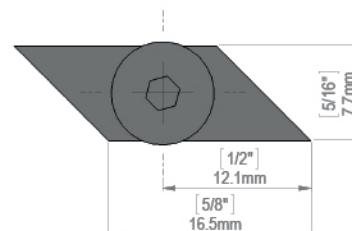

Rectangle Track Fixing

Rectangle track fixing for aluminum track profile

Rectangle Track Fixing	ACW4002
------------------------	---------

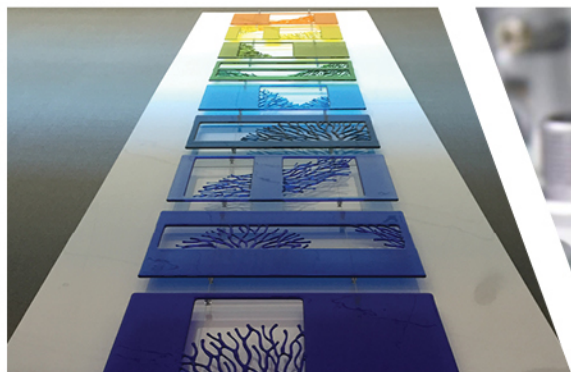

GET ALL PRICES THROUGH OUR NEW ONLINE STORE!

Welcome Mbs shoppers to our **NEW WEB SITE**, Enjoy it and please should you have any questions, call or email us at sales@mbs-standoffs.com.

1

LOG ON to

www.mbs-standoffs.com

You can select the product you are looking for by hovering over each of the categories and choosing a subcategory.

2

Search using filter selection and find the right products!

3

Use all the product tabs to find:

- Description
- Pictures
- Datasheets
- Videos

4

Our new filters make it easy to quickly find the right product. Search using filter selection and find the product for your projects needs.



FOLLOW US ON YOUTUBE!

- Product Videos
- Instruction Guides
- Testimonials
- Ideas and more...



Magnetic Pot

For Signage, Display, Poster, Graphic, etc...

Description	Item #
3/4" Pot Magnet with Hook white painted (Inside use only)	HM20W



Description	Item #
3/4" Pot Magnet (Inside use only) Threaded M4 designed for "ROD3"	MR20NI



Designed for
"ROD3"

STILL ON THE FENCE?

Order our new sample box today

**NEW
PRODUCT**



1-813-938-6025
mbs-standoffs.com



AMERICA'S # 1 CHOICE FOR STANDOFFS

BULK QUANTITY? PERSONALIZED DESIGNS? SPECIAL REQUESTS?

Contact us today!

Our Signage Hardware Experts Will be Delighted To Assist You!

1 (813) 938-6025 • sales@mbs-standoffs.com





ART HANGING SYSTEM



p135



p139



p143



p146



AMERICA'S # 1 CHOICE FOR STANDOFFS

Hanging Systems



Mbs Hanging Systems was established in 2014 to offer innovative, museum quality, professional art hanging services and supplies through advanced art hanging hardware. Mbs Hanging Systems' amazing product line was born from innovations that began with our sister company, Mbs Standoffs, which has offered state-of-the-art signage hardware for over 15 years. We saw the need for high-quality art hanging hardware at affordable prices and we took on the challenge.

Our dedicated design team, in partnership with galleries, museums, and businesses around the world, worked diligently to create a simple, beautiful, and flexible product line that is as amazing to use as it is to look at.

All of our products share one thing in common – they were designed with your needs in mind. Installation is straightforward and simple to save you time and stress. Flexibility is at an all-time high – move your art up, down, or side-to-side until it's just right. Adding, removing, or changing your art is easier than ever – it takes only a few seconds and best of all, no tools required.

At Mbs Hanging Systems, we believe the tools we provide should work so well that you don't have to consider how they might have been designed differently. That's why we strive to provide the highest quality professional art hanging products at the best price – every time.



For more information visit
<http://mbs-hanging-systems.com/>



Hanging Systems



Easy Rail System

Our Easy Rail System is simple, discreet, and designed to use in the home, office, or anywhere that appearance is important.

The key to this beautiful and strong system, rated to withstand loads up to 78 lbs (35 kg), is a series of high strength clips that install behind the rail and out of view.

Thanks to the modular nature of the Easy Rail System, you can add to, remove from, or modify your display at any time in just seconds – and no more holes in the wall!



Classic Rail System

Our Classic Rail System is effortless and inconspicuously designed, with a focus on strength, rated to hold up to an astonishing 300 lbs (136 kg) per rail!

The Classic Rail System is designed with galleries in mind, where a display may be changed many times per week. All of our Hanging Cables and Rods hook on and off in one simple motion to make it easier than ever for you to quickly update your displays!



Ceiling Rail

Our Ceiling Rail System installs into the ceiling instead of the traditional wall mounted application.

Mount it open-faced to make changing your display easier than ever or turn it around for a closed-face installation that makes your Art Hanging System even more subtle than before.

Use it in the window of your shop or use it a few inches off of the wall to give your art an amazing floating effect!



Easy Rail

Wall-Mounted



Modern Design and Discreet! Easy to install!

The Easy Rail is secured to the wall using fastening clips that conceal all fittings and wall anchors.

The Easy Rail picture hanging system is compatible with a wide variety of our hangers and hooks that make adjustment both horizontally and vertically easy, effortless and without damage to walls. Nails and unwanted holes will be a thing of the past when using Easy Rail.

Application: Wall-Mounted

Material: Aluminum

Available Length: 72"(182.88 cm)

Rail Height: 1" (25 mm)

Available Colors: Silver Satin Anodized, Black Satin Anodized, White Painted & 180 Colors Powder Coated

Rated Rail Weight: 75 lb / 35 kg
(When properly installed)


Installation

The Easy Rail mounts to the walls with the use of Screws and Anchors.

1. To hang items using the Easy Rail, you must select your hanger preference
 - Cobra Cable
 - Ball-End Cable
2. After you have selected your hanger option you must then select your hook preference
 - Cable Hook for Stainless Steel and Nylon Cable
 - Spring Hook for Nylon Cable

Hanger Compatibility

- Cobra Cable – Nylon / 13 lbs
- Cobra Cable – Stainless Steel / 26 lbs
- Ball-End Cable Stainless Steel / 45 lbs

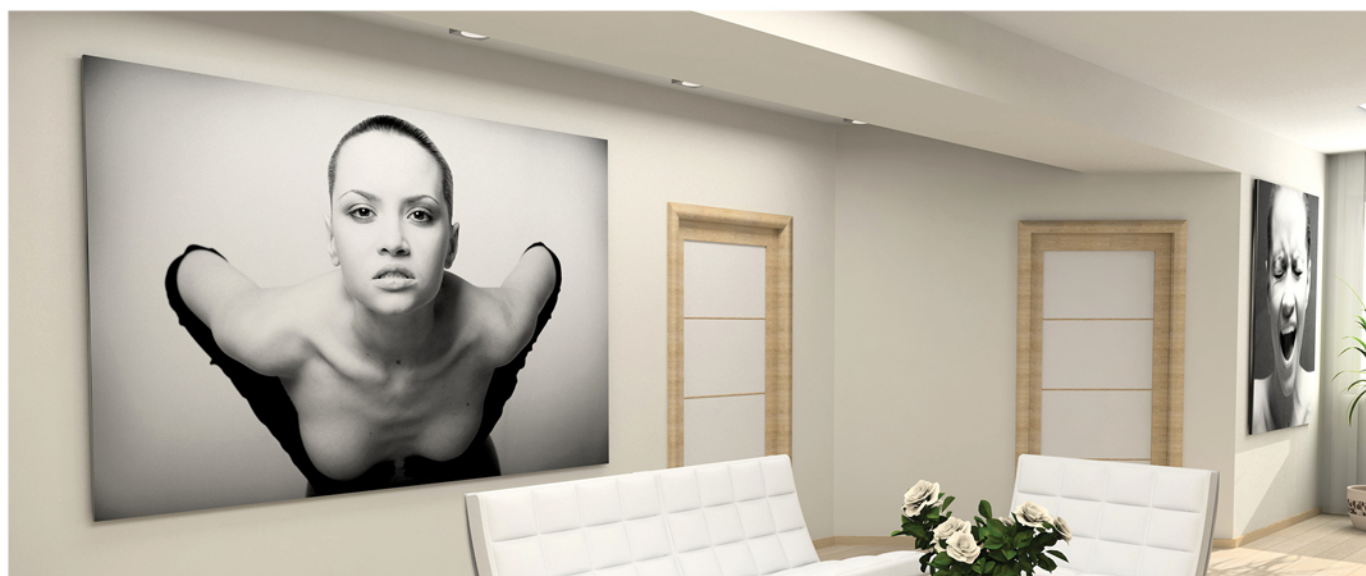

Easy Rail

Wall-Mounted

Easy Rails are Picture Hanging Systems that are optimized for home, office or anywhere else. In order to put your system together you will need to choose your finish options, then your hanger options and finally your hook style. Once you have the core of your system selected, you can pick accessories or installation hardware.

Silver Satin Anodized	AT100-A
Black Satin Anodized	AT100-B
White Painted	AT100-W
180 Colors Finishes*	AT100-C
Natural Mill**	AT100-MF

* RAL standard colors with fee

** Can have manufacturing scratches



180 Powder Coated Colors

FINISHES



Silver Satin Anodized



Black Satin Anodized



White Painted

HANGING OPTION

Ball End Cable

Available in
Stainless Steel

Item #: SSC101-**



Cobra

Available in Stainless
Steel and Nylon

Item #: SSC100, NC100-**



HOOK OPTION



Hooks for Stainless
Steel and Nylon

Item #: H105




Hooks for Nylon

Item #: SH100



Easy Rail

Wall-Mounted

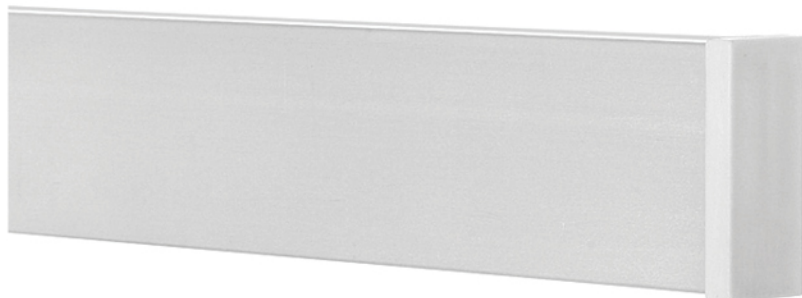

Silver Satin Anodized	AT100-A
Black Satin Anodized	AT100-B
White Painted	AT100-W
180 Colors Finishes*	AT100-C
Natural Milled**	AT100-MF
Easy Rail System Locator Kit (Drywall)	CTL150
Easy Rail System Locator Kit (Concrete)	CTL160


* RAL standard colors with fee

** Can have manufacturing scratches


CHOOSE YOUR FINISH




INSTALLATION INSTRUCTIONS

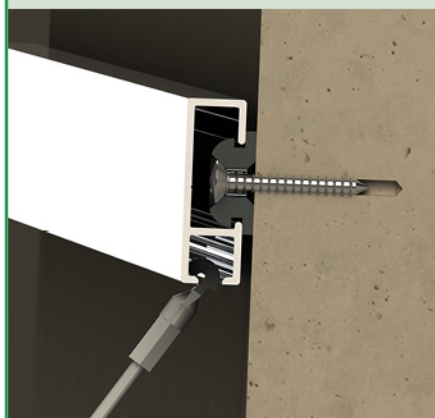

1. Mark your installation location and install 6 Locators, each 12 inches apart. If you use multiple rails end-to-end, use a Connector to install them flush.

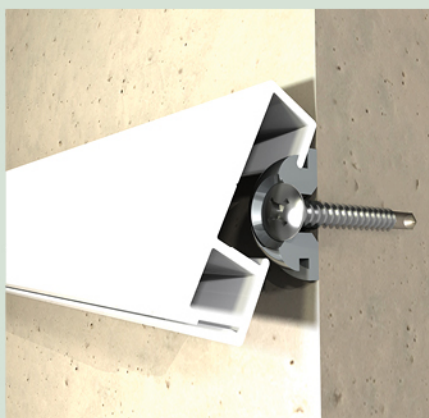

2. After your hardware is installed on the wall, line up the top of the rail with the top of the Locators, then push the bottom down until it eases into place.

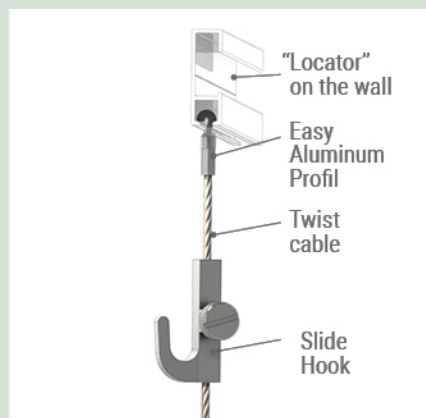

3. Finally, attach your cable to the rail and your hook to the cable and you have a beautiful picture hanging system ready to go!

Easy Rail

Wall-Mounted

Cross Compatible with

Stainless Steel
Ball End Cable

Item #:
SSC101-**



Stainless Steel
Cobra Cable

Item #:
SSC100-**



Nylon
Cobra Cable

Item #:
NC100-**



Nylon
Cobra Cable

Item #:
NC100-**



Item #:
H103
PG 140



Item #:
SGH100
PG 140



Item #:
H100
PG 142



Item #:
SH100
PG 143



Item #:
H104
PG 140



Item #:
GH0012
PG 141



Item #:
H101
PG 142



Item #:
H105
PG 140



Item #:
GH0014
PG 141



Item #:
GH0013
PG 141



Item #:
GH0015
PG 141



Classic Rail

Wall-Mounted



The Classic Rail picture hanging system is compatible with a wide variety of our hangers and hooks that make adjusting both horizontally and vertically easy, effortless and without damage to walls. Nails and unwanted holes will be a thing of the past when using Easy Rail.

Application: Wall-Mounted

Material: Aluminum

Available Length: 72" (182.88 cm)

Rail Height: 1" (25 mm)

Available Colors: Silver Satin
Anodized, Black Satin Anodized, White
Painted & 180 Colors Powder Coated

Rated Rail Weight: 75 lb / 35 kg (When
Properly Installed)

Note: This rail comes with 8 Pre-drilled holes.

Installation

Classic Rail, Picture Hanging System mounts to the wall with the use of (8) No. 6 Screws and Anchors.

1. To hang items using the Classic Rail, you must select your hanger preference
 - Rod "P" or Cable "P" hook cable
2. After you have selected your hanger option you must then select your hook preference
 - Cable Hook for Stainless Steel and Nylon Cable
 - Spring Hook for Nylon Cable

Hanger Compatibility

- Cable "P" hook
- Stainless Steel - 26lbs
- Nylon - 26lbs



Classic Rail

Wall-Mounted

Classic Rails are Picture Hanging Systems that are optimized for galleries, museums, etc. In order to put your system together you will need to choose your finish options, then your hanger options and finally your hook style. Once you have the core of your system selected, you can select the installation hardware.

Silver Satin Anodized	AT101-A
Black Satin Anodized	AT101-B
White Painted	AT101-W
180 Colors Finishes*	AT101-C
Natural Milled**	AT101-MF

* RAL standard colors with fee

** Can have manufacturing scratches



FINISHES



Silver Satin Anodized



Black Satin Anodized



White Painted

HANGING OPTION

'P' Hook Rod



'P' Hook cable

Available in Stainless Steel and Nylon



HOOK OPTION



Hooks for Stainless Steel and Nylon



Hooks for Nylon

Classic Rail

Wall-Mounted



Silver Satin Anodized	AT101-A
Black Satin Anodized	AT101-B
White Painted	AT101-W
180 Colors Finishes*	AT101-C
Natural Milled**	AT101-MF

* RAL standard colors with fee

** Can have manufacturing scratches

CHOOSE YOUR FINISH



Silver Satin
Anodized
AT101-A



Black Anodized
AT101-B



White Painted
AT101-W



Classic Rail

Wall-Mounted

Cross Compatible with

“P” Hook with Stainless Steel Cable SSC104-**			“P” Hook with Nylon Cable NC104-**			“P” Hook with Nylon Cable			
Item #: H103 PG 140			Item #: SGH100 PG 140			Item #: H100 PG 142		Item #: SH100 PG 143	
Item #: H104 PG 140			Item #: GH0012 PG 141			Item #: H101 PG 142			
Item #: H105 PG 140			Item #: GH0014 PG 141						
Item #: GH0013 PG 141			Item #: GH0015 PG 141						

Ceiling Rail

Ceiling Mount



The Ceiling Rail picture hanging system is compatible with a wide variety of our hangers and hooks that make adjusting both horizontally and vertically easy, effortless and without damage to walls. Nails and unwanted holes will be a thing of the past when using Ceiling Rail.

Application: Wall-Mounted

Material: Aluminum

Available Length: (72") - (182.88 cm)

Rail Height: 25 mm - (1")

Available Colors: Silver Satin
Anodized, Black Satin Anodized, White
Painted & 180 Colors Powder Coated

Rated Rail Weight: 75 lb / 35 kg (When
Properly Installed)

Note: This rail comes with 8 Pre-drilled holes.

Installation

Ceiling Rails, Picture Hanging Systems mounts to the wall with the use of (8) No. 6 Screws and Anchors.

1. To hang items using the Ceiling Rail, you must select your hanger preference
 - Cable "P"
2. After you have selected your hanger option you must then select your hook preference
 - Cable Hook for Stainless Steel and Nylon Cable
 - Spring Hook for Nylon Cable

Hanger Compatibility

- Cobra Cable - Nylon / 13 lbs
- Cobra Cable - Stainless Steel / 26 lbs
- Ball-End Cable Stainless Steel / 45 lbs



Ceiling Rail

Ceiling Mount

Ceiling Rails are Picture Hanging Systems that are optimized for home or office usage. In order to put your system together you will need to choose your finish hanger, then your hanging options and finally your hook options. Once you have the core of your system selected, you can select the installation hardware.

Silver Satin Anodized	AT102-A
Black Satin Anodized	AT102-B
White Painted	AT102-W
180 Colors Finishes*	AT102-C
Natural Milled**	AT102-MF

* RAL standard colors with fee

** Can have manufacturing scratches



FINISHES



Silver Satin Anodized



Black Satin Anodized



White Painted

HANGING OPTION

'P' Hook Rod



'P' Hook cable

Available in Stainless Steel and Nylon



HOOK OPTION



Hooks for Stainless Steel and Nylon



Hooks for Nylon

Ceiling Rail

Ceiling Mount



Silver Satin Anodized	AT102-A
Black Satin Anodized	AT102-B
White Painted	AT102-W
180 Colors Finishes*	AT102-C
Natural Mill**	AT102-MF

* RAL standard colors with fee

** Can have manufacturing scratches

CHOOSE YOUR FINISH



Silver Satin
Anodized
AT102-A



Black Anodized
AT102-B



White Painted
AT102-W



Ceiling Rail

Ceiling Mount

CROSS Compatible with

"J" Hook
with Stainless
Steel Cable
SSC104-**



"J" Hook
with Nylon
Cable
NC104-**



"J" Hook
with Nylon
Cable



Item #:
H103
PG 140



Item #:
SGH100
PG 140



Item #:
H100
PG 142



Item #:
SH100
PG 143



Item #:
H104
PG 140



Item #:
GH0012
PG 141



Item #:
H101
PG 142



Item #:
H105
PG 140



Item #:
GH0015
PG 141



Item #:
GH0013
PG 141



Item #:
GH0014
PG 141



Items List



Ball End

Stainless Steel
Diameter: 1/16"
Rated Strength: 45 Lbs (20 Kg)
For: Easy Rail

Length	Item #
48"	SSC101-48
60"	SSC101-60
72"	SSC101-72
96"	SSC101-96
120"	SSC101-120



Cobra

Stainless Steel
Diameter: 1/16"
Rated Strength: 45 Lbs (20 Kg)
For: Easy Rail

Length	Item #
48"	SSC100-48
72"	SSC100-72
96"	SSC100-96
120"	SSC100-120



Cobra

Nylon
Diameter: 1/16"
Rated Strength: 15 Lbs (6 Kg)
For: Easy Rail

Length	Item #
48"	NC100-48
72"	NC100-72
96"	NC100-96
120"	NC100-120



"P"

Stainless Steel
Diameter: 1/16"
Rated Strength: 45 Lbs (20 Kg)
For: Classic Rail, Ceiling Rail

Length	Item #
48"	SSC104-48
72"	SSC104-72
96"	SSC104-96
120"	SSC104-120



"P"

Nylon
Diameter: 1/16"
Rated Strength: 15 Lbs (6 Kg)
For: Classic Rail, Ceiling Rail

Length	Item #
48"	NC104-48
72"	NC104-72
96"	NC104-96
120"	NC104-120

"P" Aluminum | Square: 3/16" | Rated Strength: 70 Lbs (31kg) | For: Classic Rail, Ceiling Rail



Length	White	Black Anodized	Clear Anodized	Natural Finish	180 Color Finishes*
24"	CRP100-24W	CR100P-24B	CR100P-24A	CR100P-24MF	CR100P-24C
48"	CR100P-48W	CR100P-48B	CR100P-48A	CR100P-48MF	CR100P-48C
72"	CR100P-72W	CR100P-72B	CR100P-72A	CR100P-72MF	CR100P-72C
96"	CR100P-96W	CR100P-96B	CR100P-96A	CR100P-96MF	CR100P-96C


* Hand Packing Fee applied

Hooks for Stainless Steel and Nylon Cable



Brass – Nickel plating




H103-NK




H104-NK




H105-NK




SGH100




GH0012




GH0013



GH0014



GH0015



Finish	Use	Diameter	Strength	Use	Item #
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	H103-NK
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	H104-NK
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	H105-NK
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	SGH100
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	GH0012
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	GH0013
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	GH0014
Nickel	Ball End, Cobra Cable, "P" Hook Cable	3/64" (1.2 mm) to 1/16" (1.5 mm)	15 lbs (6 kg)	Classic Rail, Ceiling Rail	GH0015

Hooks for Stainless Steel and Nylon Cable

Screw Gripping

Brass

Finish: Nickel plating

For use with: Ball End, Cobra Cable, "P" Hook Cable


For cable diameter: 3/64" (1.2 mm) to 1/16" (1.5 mm)

Rated strength: 15 lbs (6 kg)

For: Classic Rail, Ceiling Rail

Nickel Plating

H100NK

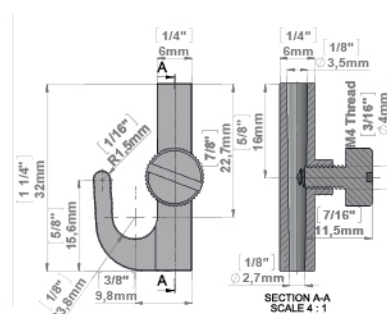

Screw Gripping

Aluminum

Finish: Nickel plating

For use with: Ball End, Cobra Cable, "P" Hook Cable


For cable diameter: 3/64" (1.2 mm) to 1/16" (1.5 mm)

Rated strength: 15 lbs (6 kg)

For: Classic Rail, Ceiling Rail

Nickel Plating

H101NK



Looper for Nylon Cable

Locking Looper – Aluminum


Finish: Clear Anodized

For cable diameter: 1/16" (2 mm)

Rated strength: 15 lbs (6 kg)

Clear Anodized

DG005




Cable Tensioner

Spring

Application: Cable tensioner

Brass

TSS100



Looped Cables

1/16" Diameter

Nylon

NHC-48

NHC-72

NHC-96

NHC-120



Stainless Steel

SHC-48

SHC-72

SHC-96

SHC-120



Hooks for Stainless Steel and Nylon Cable

Spring Gripping for use with Nylon cable only

Steel


Finish: Nickel Plating

For use with: Ball End, Cobra Cable, "J" Hook Cable, "P" Hook Cable

For Cable Diameter: 1/16" (2 mm)

Rated Strength: 15 Lbs (6 Kg)

For: Classic Rail, Ceiling Rail

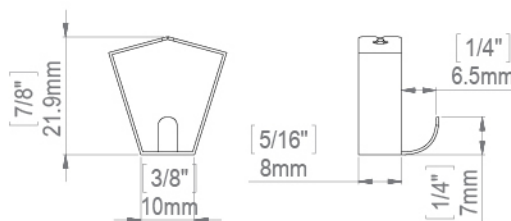

Item #: SH100

Picture Stabilizer

Size: 6 7/8"

Material: Steel

Finish: Nickel Plating

Item #: SPS100



Picture Stabilizer

Size: 11 5/8"

Material: Steel

Finish: Nickel Plating

Item #: BPS100



HARDWARE




Locator

Aluminum

Finish: Nickel Plating

For use with: Easy Rail

Item #: CTL100



ACCESSORIES

Use Tclamp to attach to drop ceiling.



Connector for Easy Rail

Brass

For use with: Easy Rail

Item #: CTC100

Locator Kit (6Pcs)	Item #	Finish	Item #
 Drywall	CTL150	Steel Painted White	Tclamp
 Concrete	CTL160	Steel Painted White	Tclamp1
		Clear Acrylic	Tclamp2
Screw	Anchor	Item #	
 Phillips Screw #6 x 1 1/4"	Rapid Anchor for Drywall	SADW6	
 Phillips Screw #8 x 1 1/4"	Rapid Anchor for Drywall	SADW8	
 Phillips Screw #6 x 1 1/4"	Anchor for Concrete	SACW6	
 Phillips Screw #8 x 1 1/4"	Anchor for Concrete	SACW8	

Steel Swan Hook



Item# SH102




Item # CABLECUTTER

Aluminum Snap Frames

High-Quality Aluminum Construction

- Easy Front Loading System
- Multi-Purpose Use
- Lightweight PVC Protector Included
- Thin Profile

The classic easy to use snap frame has been around for years, but still offers the best value for money on the market for easy poster change. This Aluminum frame is made to the highest industry standards, the best quality available at the lowest price. Constructed of lightweight material these frames deliver multi-functional usage and application options. Snap frames can be used as picture frame, poster frame, wall sign, artwork, wall frame, notices, door sign, office door sign, etc. Posters are kept clean behind a resistant, anti-glare PVC front sheet. The snap frame can be mounted both portrait and landscape (vertical and horizontal) and comes ready with screws and holes for wall mounting.

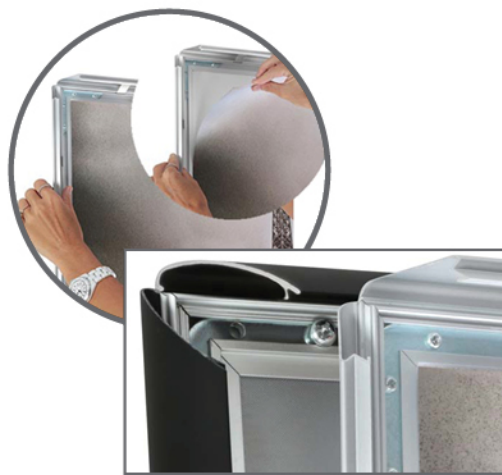

Easy Open/Close Frame
Quick Changing System



Frame Size	Profile	Insert Size		
			Aluminum	Black
12.5" x 18.5"	1.25"	11" x 17"	ALSF01	ALSF02
19.5" x 25.5"	1.25"	18" x 24"	ALSF03	ALSF04
23.5" x 29.5"	1.25"	22" x 28"	ALSF05	ALSF06
23.5" x 29.5"	1.00"	22" x 28"	N/A	ALSF07
25.5" x 37.5"	1.25"	24" x 36"	ALSF08	ALSF09
28.5" x 41.5"	1.25"	27" x 40"	ALSF10	ALSF11
31.5" x 41.5"	1.25"	30" x 40"	ALSF12	ALSF13
37.5" x 49.5"	1.25"	36" x 48"	ALSF14	ALSF15
41.5" x 61.5"	1.25"	40" x 60"	ALSF16	ALSF17

Hanging Banner Rails

Enjoy quick changing systems to change from one piece to another with ease

Choose From 3 Styles

Aluminum Rails with Locking Rollers



- Sturdy Aluminum
- Easy to Install
- Rollers Lock Banner in Place
- Lift to Remove, Replace and Done

Length	Part #
8.5"	AAP85
11"	AAP11
18"	AAP18
22"	AAP22
24"	AAP24
27"	AAP27
30"	AAP30
48"	AAP48
72"	AAP72

2 Piece Aluminum Snap Rails with Spring Mechanism



Great for wide papers, posters and banners. Quick changing display and elegant design. Easy open/close and reusable system

8.5"	ABR85
11"	ABR11
18"	ABR18
22"	ABR22
24"	ABR24
27"	ABR27
30"	ABR30
48"	ABR48
72"	ABR72


Clear Plastic Snap Rail



8.5"	SCP85
11"	SCP11
18"	SCP18
22"	SCP22
24"	SCP24
27"	SCP27
30"	SCP30
36"	SCP36
48"	SCP48
72"	SCP72



America's # 1, choice for standoffs

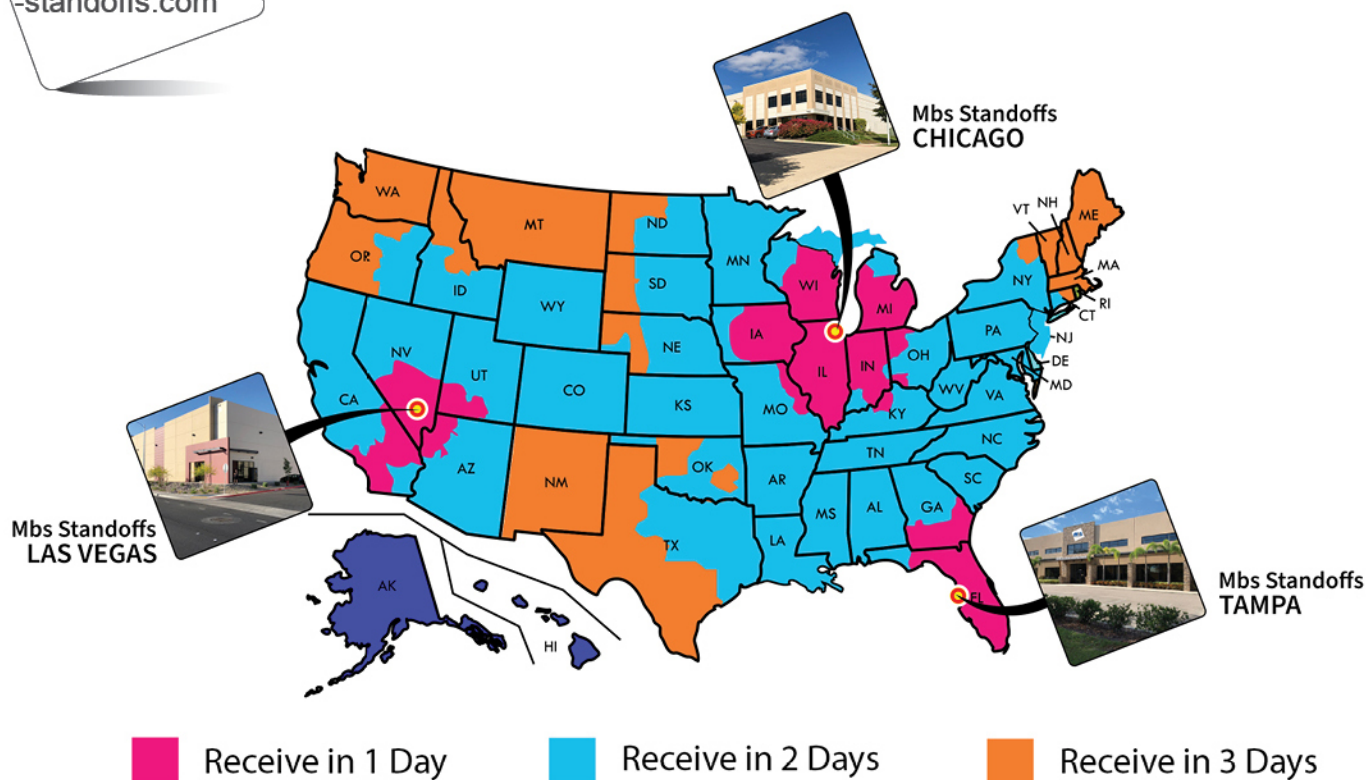

Free Daily pickup and 1 or 2 days ground shipping to most of the States

FedEx



Phone: 1 (813) 938-6025

Fax: 1 (813) 425-9007

mbs-standoffs.com

sales@mbs-standoffs.com

HQ Address:

5046 W Linebaugh Ave.
Tampa, FL 33624

Phone: 1 (813) 938-6025

Las Vegas Address:

8375 Eastgate Rd.
Henderson, NV 89015
Phone: 1 (213) 769-4010

Chicago Address:

941 Enterprise Ct.
St Charles, IL 60174
Phone: 1 (917) 728-1182